



KT-0700 Ice Kube Machine

KT-0700 ICE KUBE MACHINE

Models

☐ KDT-0700A ☐ KYT-0700A



Koolaire KT-0700
Ice Kube Machine on K570 Bin

Koolaire by Manitowoc ice machines are designed, developed and tested by Manitowoc engineers to provide great ice production, energy efficiency and reliable service at an affordable price.

Performance/Features/Benefits

- Produces up to 510 lbs (231 kg) of ice per day**
- Performance certified by the Air Conditioning, Heating and Refrigeration Institute (AHRI)
- Energy Efficient models - visit EnergyStar.gov to view all Energy Star qualifying models
- Highly efficient electro-less nickel plated copper evaporators made in Manitowoc WI, USA
- Simple operation - only one control, three positions ON/OFF/CLEAN
- High-Tech exterior with smudge and fingerprint resistant stainless-like finish
- Better for the environment. Uses R410A refrigerant which lowers global warming potential by 48%
- Backed by the industry's best Manitowoc distribution network and service agents

Built for Easy Sanitation

- Easy access front facing evaporator
- One-touch remedial cleaning; requires minimal interaction; just add chemical and let the machine do the rest. No ice removal from bin needed. (Use Manitowoc De-scaler and Sanitizer only)
- For detail cleaning; all food zone components removable by hand (no tools required). Fast and easy
- All white plastic interior, no exposed tubes or wires, smooth rounded corners for fast easy wipe downs
- The food zone is sealed from above and on the back of the door panel with commercial grade rubber gaskets
- Alpha San anti-microbial agent molded in selected components
- **Available LuminIce II Virus and Bacteria Inhibitor** - Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer

**based on 70F air / 50F water

Ice Machine Electric

230V / 50Hz / 1Ph

Max Power Load (W):

1465 (Peak W) and 1186 (Average W)

Minimum circuit ampacity:

Air-cooled: 6.7

Maximum fuse size:

Air-cooled: 15

Specifications

Operating Limits:

- Ambient Temperature Range: 40° to 110° F (4.4° to 43.3° C)
- Water Temperature Range: 40° to 90° F (4.4° to 32.2° C)
- Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPa) Max. 80 psi (551.1 kPa)

BTU Per Hour:

12,500 (average) and 13,700 (peak)

Refrigerant:

R410A CFC - Free
Lowers global warming by 48%

Ice Shape



HALF KUBE

3/4" x 1 1/4" x 7/8"
(.95 x 2.86 x 2.22 cm)

❄ = 100%



KUBE

7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)

❄ = 100%




US LISTED



AutoQuotes



KT0700 on K-570 Storage Bin

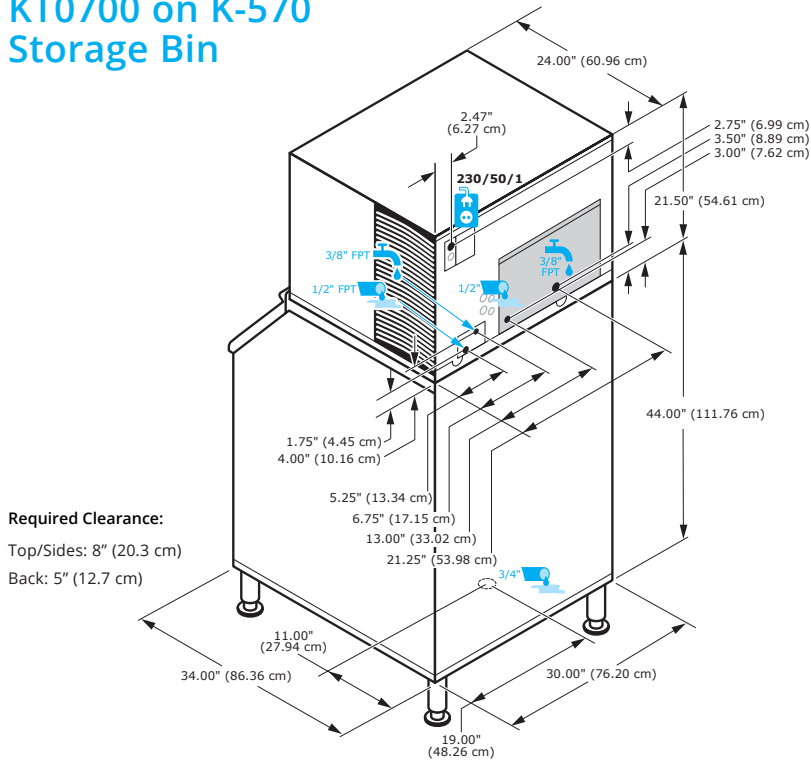

Required Clearance:
Top/Sides: 8" (20.3 cm)
Back: 5" (12.7 cm)

Space-Saving Design



KT0700
K-570

Height	71.50"
	181.61 cm
Width	30.00"
	76.2 cm
Depth	34.00"
	86.30 cm
Bin	532 lbs.
Storage	241 kgs.

*Measurements with bin legs at 6.00" (15.24cm).
Adjustable bin legs 6.00" to 8.00" (15.24cm to 20.32cm). Bin capacity is based on 90% of the volume x 33 lbs/ft 3 average density of ice.*

Specifications

AIR COOLED	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
			70°/ 50°F 21°/ 10°C	90°/ 70°F 32°/ 21°C		
	KDT-0700A	dice	501 lbs.	465 lbs.	5.35	19 Gal.
			227 kgs	211 kgs		71.9 L
	KYT-0700A	half-dice	510 lbs.	472 lbs.	5.12	19 Gal.
			231 kgs	214 kgs		71.9 L

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Order ice machine and bin separately.

This product is hermetically sealed and contains fluorinated greenhouse gas R410A.

Shipping Weight:

Air-cooled: 170 lbs (77 kg)



Accessories


Dispenser Bin Thermostat Kit

Reduces condensation when used with dispensers.



Top Air Discharge Kit

Convert air flow to rear in-take / top exhaust.



Arctic Pure Plus® Water Filters

reduce sediments and chlorine contaminants down to .5 microns. Use with a Pre-filter is recommended.



Luminice II Virus and Bacteria Inhibitor controls viruses and bacteria inside the ice machine

