

"ST4R1.5-GBK" STAINLESS STEEL TOP WORK TABLES

14GA Top w/1.5" Riser & Galvanized Legs & Adjustable Bracing

FEATURES:

- 14GA Stainless Steel Top
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- Top Is Sound Deadened
- Reinforced With 1"x2" Channel Running Length Of Table
- 1-1/2" Stallion Edge On Front And 1-1/2" Backsplash On Rear With Side Edges 90 Degree Bend Down For Table Line-Up
- Galvanized Base With Adjustable Bracing
- Adjustable Bullet Feet
- Shipped Knocked-Down, Easy-To-Assemble

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Top: 14GA, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Bracing: 1-1/4" Round O.D. , 18GA Tubular Galvanized
- Legs: 1-5/8" Round O.D. , 16GA Tubular Galvanized
- Gussets: Galvanized Steel
- Feet: 1" Adjustable Stainless Steel Bullet Feet



ST4R1.5-3048GBK

CERTIFICATIONS:



ACCESSORIES

DESCRIPTION

Drawer

Drawer Lock

Casters

Overshelves

Sinks


Pot Rack

"ST4R1.5-GBK" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424GBK	42	900	ST4R1.5-3024GBK	47	900	ST4R1.5-3624GBK	53	900
30"	ST4R1.5-2430GBK	47	900	ST4R1.5-3030GBK	52	900	ST4R1.5-3630GBK	60	900
36"	ST4R1.5-2436GBK	52	900	ST4R1.5-3036GBK	59	900	ST4R1.5-3636GBK	67	900
48"	ST4R1.5-2448GBK	63	900	ST4R1.5-3048GBK	70	900	ST4R1.5-3648GBK	80	900
60"	ST4R1.5-2460GBK	73	650	ST4R1.5-3060GBK	82	650	ST4R1.5-3660GBK	93	650
72"	ST4R1.5-2472GBK	83	420	ST4R1.5-3072GBK	93	420	ST4R1.5-3672GBK	106	420
84"	ST4R1.5-2484GBK	102	1350	ST4R1.5-3084GBK	115	1350	ST4R1.5-3684GBK	130	1350
96"	ST4R1.5-2496GBK	112	1350	ST4R1.5-3096GBK	127	1350	ST4R1.5-3696GBK	144	1350
108"	ST4R1.5-24108GBK	121	1350	ST4R1.5-30108GBK	138	1350	ST4R1.5-36108GBK	158	1350
120"	ST4R1.5-24120GBK	133	1200	ST4R1.5-30120GBK	150	1200	ST4R1.5-36120GBK	172	1200
132"	ST4R1.5-24132GBK	143	960	ST4R1.5-30132GBK	162	960	ST4R1.5-36132GBK	185	960
144"	ST4R1.5-24144GBK	154	750	ST4R1.5-30144GBK	175	750	ST4R1.5-36144GBK	201	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

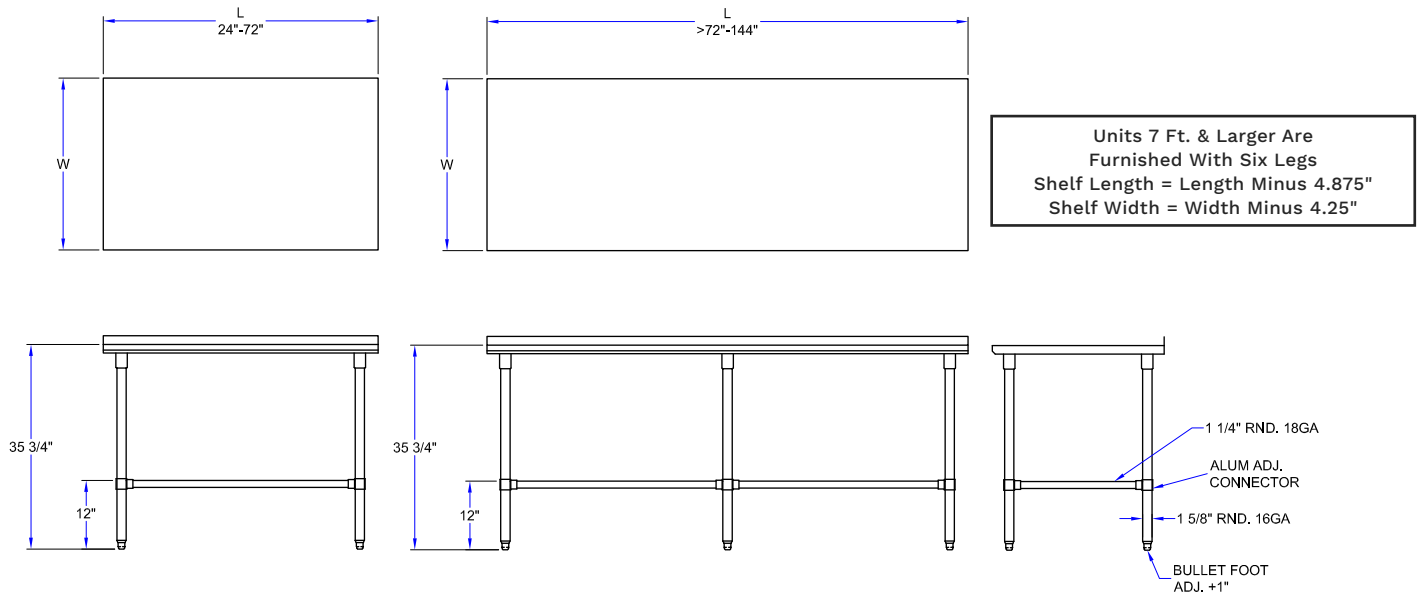


MODEL # STRUCTURE

1.5 = Ht. Of Riser w/Turndown

R = Top w/Riser

4 = 14GA Work Surface

ST = Stainless Steel Top



24 = Width Of Work Surface

30 = Length Of Work Surface

GB = Galvanized Legs & Bracing

K = Ships Knocked Down

ST4R1.5-2430GBK

"ST4R1.5-GBK" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424GBK	42	900	ST4R1.5-3024GBK	47	900	ST4R1.5-3624GBK	53	900
30"	ST4R1.5-2430GBK	47	900	ST4R1.5-3030GBK	52	900	ST4R1.5-3630GBK	60	900
36"	ST4R1.5-2436GBK	52	900	ST4R1.5-3036GBK	59	900	ST4R1.5-3636GBK	67	900
48"	ST4R1.5-2448GBK	63	900	ST4R1.5-3048GBK	70	900	ST4R1.5-3648GBK	80	900
60"	ST4R1.5-2460GBK	73	650	ST4R1.5-3060GBK	82	650	ST4R1.5-3660GBK	93	650
72"	ST4R1.5-2472GBK	83	420	ST4R1.5-3072GBK	93	420	ST4R1.5-3672GBK	106	420
84"	ST4R1.5-2484GBK	102	1350	ST4R1.5-3084GBK	115	1350	ST4R1.5-3684GBK	130	1350
96"	ST4R1.5-2496GBK	112	1350	ST4R1.5-3096GBK	127	1350	ST4R1.5-3696GBK	144	1350
108"	ST4R1.5-24108GBK	121	1350	ST4R1.5-30108GBK	138	1350	ST4R1.5-36108GBK	158	1350
120"	ST4R1.5-24120GBK	133	1200	ST4R1.5-30120GBK	150	1200	ST4R1.5-36120GBK	172	1200
132"	ST4R1.5-24132GBK	143	960	ST4R1.5-30132GBK	162	960	ST4R1.5-36132GBK	185	960
144"	ST4R1.5-24144GBK	154	750	ST4R1.5-30144GBK	175	750	ST4R1.5-36144GBK	201	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.