

300-HWIS Series

Waterless Hot Food Well

ALTO-SHAAM

Unlike traditional steam tables or dry wells, waterless hot food wells from Alto-Shaam feature radiant Halo Heat® technology that evenly surrounds food without the use of extremely hot elements, added humidity or fans. Extend hold times, maintain food quality and reduce operating costs to maximize return on investment.



300-HWIS/D6

Standard Features

- Extend food holding times with efficient, precise Halo Heat® technology
- Maintain food quality without the use of extremely hot elements, added humidity or fans
- Increase sales with attractive food presentation and quality
- Reduce installation and operating costs with no water or plumbing needed
- Save on maintenance costs, eliminating lime and scale buildup associated with traditional steam tables
- Increase employee and customer safety with elimination of hot water and steam
- Provide optimal holding temperatures with an adjustable thermostat that can be flush-mounted into the counter or a location out of sight from customers
- Set ideal holding temperatures for any dish with an individual well control option
- Includes six (6) half/third-size pan dividers

Configurations (select one)

Electrical

- 120V
- 208–240V
- 230V

Control box cord location

- Back, standard
- Bottom, optional

Accessories (select all that apply)

- Pan divider bar—half-size/third-size [11318]
- Locking kit [5020849]



CAPACITY

- 3** Three full-size or GN 1/1 pans
- 6** Six half-size or GN 1/2 pans
- 9** Nine third-size or GN 1/3 pans
- 108 lb (49 kg) product maximum
- 66 qt (63L) volume maximum




IP X3



300-HWIS Series



Specification

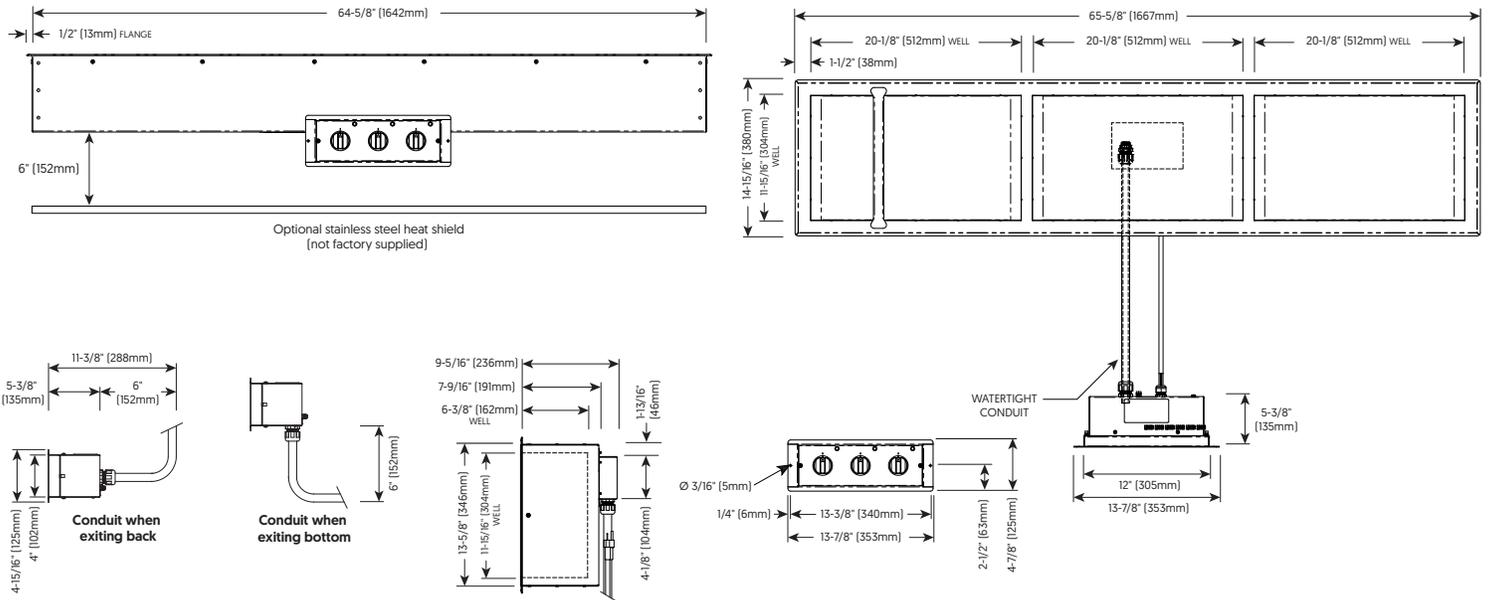

Exterior (H x W x D)

9-5/16" x 65-5/8" x 14-15/16" (236mm x 1667mm x 380mm)

Net Weight

77.5 lb (35 kg)

Ship Weight**

160 lb (73 kg)

**Domestic ground shipping information. Contact factory for export weight and dimensions.

Interior (H x W x D)

6-3/8" x 11-15/16" x 20-1/8" (162mm x 304mm x 512mm)

Ship Dimensions (L x W x H)**

72" x 35" x 18" (1829mm x 889mm x 457mm)

Cutout Dimensions

Model Non-combustible Surface Cutout (L x W)^

300-HWIS 64-3/4" x 13-13/16" (1645mm x 351mm)

Control Box Cutout (H x W x D)*

4-1/4" x 12-1/4" x 11-3/8" (108mm x 311mm x 288mm)

^Do not install on combustible materials.

*Allow 6" (152mm) clearance from control box to conduit bend.



- Appliance must be installed level and must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Some foods may require additional overhead heating. Always monitor the food temperature and add overhead heating when needed.
- Countertop material must withstand temperatures up to 200°F (93°C).
- A stainless steel heat shield is recommended if the area under the appliance is used for storage.



1" (25 mm) from combustible surfaces



300-HWIS	V	Ph	Hz	A	kW	Cord & Plug
120V	120	1	50/60	15.0	1.8	NEMA 5-20p 20A-125V plug
208-240V	208	1	50/60	6.5	1.4	NEMA 6-15p 15A-250V plug (U.S.A. only)
	240	1	50/60	7.5	1.8	
230V	230	1	50/60	7.8	1.8	CEE 7/7 plug rated 250V
						CH2-16p plug rated 250V
						BS 1363 (U.K. only) plug rated 250V

Cord length: 120V: 6 ft (1.8 m); 208-240V: 9 ft (2.7 m); 230V (CEE): 9 ft (2.7 m); 230V (CH, BS): 8 ft (2.5 m)



Heat of rejection

300-HW	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	243	0.07

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com