

PROJECT:		
ITEM#		QTY:
MODEL# _		
AIA #	SIS#	
APPROVED:		

VISTA® BOTTOM MOUNT REACH-IN FREEZER

Model: FB23HC-1G

GLASS DOORS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- · Stainless steel front and grille, gray painted sides
- Gray painted aluminum interior
- Full electronic control
- · LED lighting
- Self-closing door with 120° stay-open feature, on spring-loaded hinges
- One-piece grille allow easy removal/installation for preventative maintenance
- . Three (3) heavy duty epoxy coated wire shelves standard
- · 6" Casters standard with (2) brakes

UL cUL us W /kcl R AQ

OPTIONS & ACCESSORIES


- · Epoxy shelves (5 max per section)
- · Shelf clips
- · 3" Casters or 6" legs
- 6" Flanged/seismic feet
- Door lock
- · Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperatures of 0° F and below

BEVERAGE-AIR.

Vista® Bottom Mount Freezer Model: FB23HC-1G

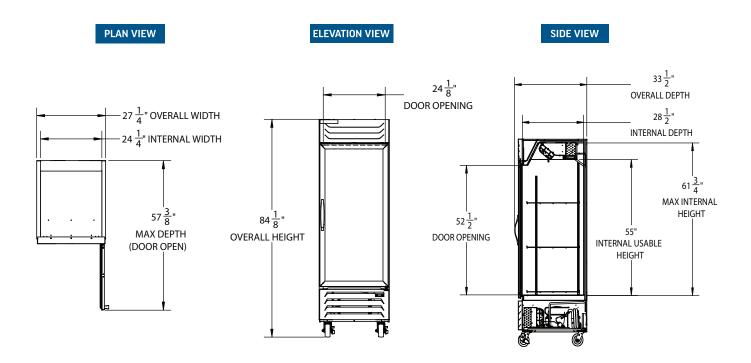

EXTERNAL DIMENSIONAL DATA			
Width Overall (in)	27 1/4"		
Depth Overall (in)	33 3/4"		
Height Overall (in)	84 1/8"		
Number of Doors	1		
Depth with Door open 90° (in)	57 3/4"		
Door Openings (in)	24 1/8" x 52 1/2"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft).	23.32		
Internal Width Useable (in)	24 1/4"		
Internal Depth Overall (in)	28 1/2"		
Internal Height Overall (in)	61 3/4"		
Number of Shelves	3		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA			
Full Load Amps	6.34		
Voltage	115/60/1		
Nema Plug (8' cord)	5-15P		
REFRIGERATION DATA			
Horsepower	3/4		
Capacity (BTU/Hr)	2097		
Heat Rejection (BTU/Hr)	3145		
Charge (lbs/grams/ounces)	0.2094 / 95 / 3.35		
SHIPPING DATA			
Gross Weight - Crated	408 lbs.		
Height - Crated (in)	85"		
Width - Crated (in)	28"		
Depth - Crated (in)	36"		

ELECTRICAL CONNECTION



115/60/1 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 9/25 | Printed in U.S.A.

