

Tray Drying Racks

Standard Features & Benefits

- ◆ Designed for heavy duty correctional use
- ◆ Ideal for areas that do mass feedings such as schools and military bases
- ◆ Designed to get maximum air circulation to dry trays quickly
- ◆ Available adjustable or fixed
- ◆ Three styles to hold various type of trays, guides are spaced on 1", 2", 1.5", 2.75", and 3" centers
- ◆ Tray capacity depends on type of tray, *A tray must be supplied with order to assure proper fit*



ATR-F6028/3-1.5



ATR4828/3.1



OTDR-6028-2

Options:

- ☐ /UB U Braces(Adjustable Only)
- ☐ /B Corner Bumpers
- ☐ /TG Tray guard at each level
- ☐ /PU 6" x 2" polyurethane plate casters
- ☐ /CB Perimeter bumper(all welded only)

Model:

- ☐ ATR
- ☐ ATR-F
- ☐ OTDR

Approved For
Correctional Use

Job Name: _____

Qty: _____

Item: _____

814 Jordan Lane, Decatur, GA 30033
404-296-9080 1-800-810-9080 Fax: 404-296-3040

HELMAX
Equipment

Adjustable Specifications:

FRAME:

Unit to be constructed of all welded aluminum extrusions for strength. Cross pieces are 1½" x 1¾" x .070 tubing.

SHELVES:

Are to be field adjustable with set screws in the corner blocks. the guides are 5/8" high and spaced 1", 1.5", or 3" centers.

CASTERS: Unit features 6" x 1½" polyurethane stem casters with zerk fitting, four swivel and with two brakes.

UBRACES:

1½" x 1¾" tubing frame at the bottom to give additional strength to the unit.

Fully Welded Specifications:


FRAME:

Unit to be constructed of all welded aluminum extrusions for strength. Cross pieces are 1½" x 1¾" x .070 tubing.

SHELVES:

Shelving guides are 5/8" high and spaced 1", 1.5", or 3" centers. All guides are .090 thick, radiused and deburred for safety. The guides are continuously welded to the uprights.

CASTERS: Unit features 6" x 2" polyolifin swivel stem casters with zerk fitting, four swivel and with two brakes.

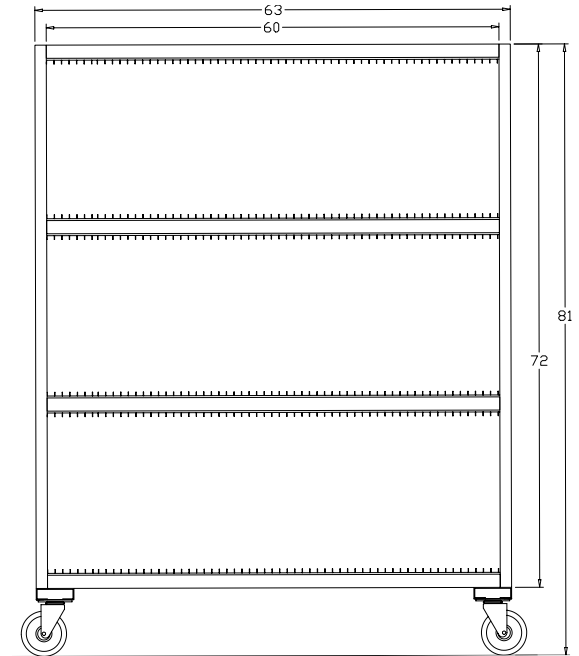

Gusset Leg(DRCGL) Option

MODEL	# OF OPENINGS	GUIDE SPACING(IN)	DxL	WGT
ATR-F4828/3-1	3	1	28x51.5	215
ATR-F4828/3-1.5	3	1.5		
ATR-F4828/3-2.75	3	2.75		
ATR-F6028/3-1	3	1	28x63.5	215
ATR-F6028/3-1.5	3	1.5		
ATR-F6028/3-2.75	3	2.75		
ATR-F6028/4-1	4	1	28x63.5	265
ATR-F6028/4-1.5	4	1.5		
ATR-F6028/4-2.75	4	2.75		
DRYING RACK FOR SHEET PANS				
ATR-F6028/3-1826	3	1	28x63.5x68	195
DRYING RACK FOR OVAL TRAYS - TOP GUIDE IS 3 1/8" LONG				
OTDR-6028-2	2	1	28x63.5x62	150

MODEL	# OF OPENINGS	GUIDE SPACING(IN)	DxL	WGT
ATR4828/3-1	3	1	28x51.5x62	195
ATR6028/3-1.5	3	1.5	28x63.5x62	210
ATR6028/3-2.75	3	2.75	28x63.5x62	215



814 Jordan Ln. Decatur, GA 30033

404-296-9080 1-800-810-9080 Fax: 404-296-3040

www.kelmax.com