

PROJECT:		
ITEM#		QTY:
MODEL# _		
AIA #	SIS #	
APPROVED:		

### **BAR EQUIPMENT - BACK BAR REFRIGERATOR**

Model: BB48HC-G-S

**GLASS DOORS** 



# 7 YEAR WARRANTY Parts, Labor, and Compressor

#### **CABINET CONSTRUCTION**

- Exterior is stainless steel front with continuous coil coated sides
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- · Full electronic control
- · 1" Stainless steel top standard
- ADA compliance (standard height)
- Self-closing doors with 120° stay-open feature
- · Door locks
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Packaged products only
- · Four (4) epoxy coated wire shelves
- · Compressor standard on left side
- Balanced, forced air refrigeration system provides rapid chilling of product

## 

#### **OPTIONS & ACCESSORIES**


- Right side compressor location (-ALT) (specify at time of unit order)
- Wine model (40°-60° models)
- · Wire shelf divider
- · Additional shelves
- Additional shelf clips
- · 3" or 6" Casters
- 6" Black legs
- · Remote option\* ( see note on back on page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F

# **BEVERAGE-AIR**.

### **Back Bar Refrigerator Model: BB48HC-G-S**

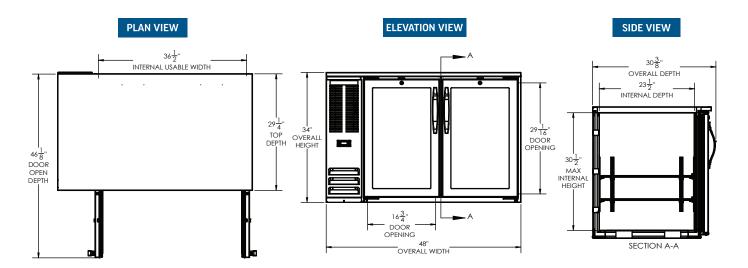

HEIGHT OPTIONS			
OPTIONS	HEIGHT		
Standard Floor Mount	34"		
3" Casters	37"		
6" Casters	40"		

EXTERNAL DIMENSIONAL DATA			
Width Overall (in)	48"		
Depth Overall (in)	30 3/8"		
Height Overall (in)	34"		
Number of Doors	2		
Depth with Door open 90° (in)	46 1/8"		
Door Openings (in)	16 3/4" x 29 1/16"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft).	15.139		
Internal Width Useable (in)	36 1/2"		
	· · · · · ·		
Internal Depth Overall (in)	23 1/2"		
	•		
Internal Depth Overall (in)	23 1/2"		

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA				
Full Load Amps	3			
Voltage	115/60/1			
Nema Plug (8' cord)	5-15P			
REFRIGERATION DATA				
Horsepower	1/4			
Capacity (BTU/Hr)	1702			
Heat Rejection (BTU/Hr)	2553			
Charge (lbs/grams/ounces)	0.1212 / 55 / 1.99			
SHIPPING DATA				
Gross Weight - Crated	312 lbs.			
Height - Crated (in)	42 3/16"			
Width - Crated (in)	50 3/4"			
Depth - Crated (in)	36 1/2"			

#### **ELECTRICAL CONNECTION**



115/60/1

Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/25 | Printed in U.S.A.

