

MODEL # SCMB-MTRH / MTLH-H54

SPECIFICATIONS

The Monarch Dual bakery refrigerated case is made to be utilized with another Monarch Dual display or with a Monarch Dual Over-Under display. The units are mitered to a 90 degree outside corner in lengths of 72" to 96" on the customer side to allow for proper access and shelving on the service side. Tempered glass top and front on the ambient case and insulated glass with heat added to the front glass on the Refrigerated display.**

Available lengths: ☐ 72" ☐ 84" ☐ 96"
 Available depths: ☐ 35 3/4"
 Available heights: ☐ 54"



STANDARD FEATURES

Ambient Unit

- Standard grade laminate exterior
- Mirrored laminate interior ends
- 1/2" tempered glass top & front
- 2 Tempered glass shelves
- White laminated deck
- See-through mirrored rear-sliding access doors

Refrigerated Unit

- Self-contained refrigeration
- Standard grade laminate exterior
- Mirrored laminate interior ends
- 1/2" insulated glass top
- 1/2" insulated glass front-heated base
- Energy Efficient LED Lighting
- 2 Tempered glass shelves
- White laminated interior deck
- Insulated see-through mirrored rear sliding access doors
- 8' cord and plug
- ETL listed in Accordance with UL 471 and NSF 7 standards
- Self-evaporating condensing unit
- Environmentally safe refrigerant
- Floor drain required (*Remote Refrigerated only*)

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Rear Door Locks
- ☐ Rear Fold-down Wrap Board
- ☐ Intermediate Custom Lengths
- ☐ Pull Down #23 Econo Frost Night Curtain (Bottom Section)

If the case is ambient and stand alone it will be provided with UV bonded glass. In the event an ambient case is joined with an airtight or heated cases, the UV bonded glass will be changed to insulated glass



CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v10_1_19

MODEL # SCMB-MTRH / MTLH-H54

SELF - CONTAINED

RIGHT-HAND	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-MTRH-H54	72	35 3/4	54	1/2	115V	13.9	5-20P	1000	134A
SCMB84R-MTRH-H54	84	35 3/4	54	1/2	115V	14.6	5-20P	1100	134A
SCMB96R-MTRH-H54	96	35 3/4	54	1/2	115V	14.7	5-20P	1200	134A

LEFT-HAND	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-MTLH-H54	72	35 3/4	54	1/2	115V	13.9	5-20P	1000	134A
SCMB84R-MTLH-H54	84	35 3/4	54	1/2	115V	14.6	5-20P	1100	134A
SCMB96R-MTLH-H54	96	35 3/4	54	1/2	115V	14.7	5-20P	1200	134A

REMOTE - REFRIGERATED



RIGHT-HAND	BTU @ 20 °F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-RR-MTRH-H54	4140	115V	2.4	5-15P	950	Verify
SCMB84R-RR-MTRH-H54	4140	115V	3.1	5-15P	1050	Verify
SCMB96R-RR-MTRH-H54	4140	115V	3.15	5-15P	1150	Verify

LEFT-HAND	BTU @ 20 °F	VOLT	AMP	PLUG	WT	REFRIG.
SCMB72R-RR-MTLH-H54	4140	115V	2.4	5-15P	950	Verify
SCMB84R-RR-MTLH-H54	4140	115V	3.1	5-15P	1050	Verify
SCMB96R-RR-MTLH-H54	4140	115V	3.15	5-15P	1150	Verify

AMBIENT

RIGHT-HAND	VOLT	AMP	PLUG	WT
SCMB72D-MTRH-H54	115V	2.4	5-15P	750
SCMB84D-MTRH-H54	115V	3.1	5-15P	850
SCMB96D-MTRH-H54	115V	3.15	5-15P	950

LEFT-HAND	VOLT	AMP	PLUG	WT
SCMB72D-MTLH-H54	115V	2.4	5-15P	750
SCMB84D-MTLH-H54	115V	3.1	5-15P	850
SCMB96D-MTLH-H54	115V	3.15	5-15P	950

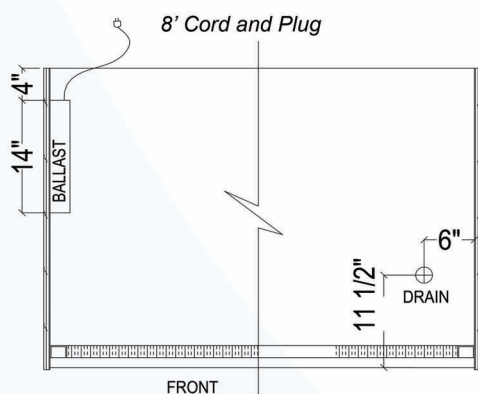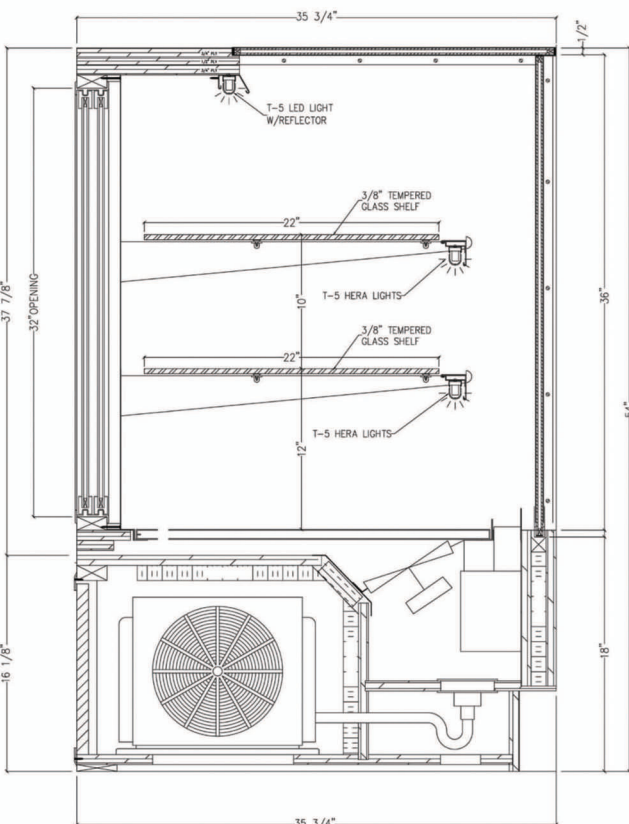

Electrical & Plumbing locations

1. All units must be run to a floor drain at time of installation.
2. The SCMB-MTRH / MTLH-H54 merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R. H. Locate away from direct sunlight, rapid air currents and extreme temperature changes, Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within. Any adverse field conditions stated above will void warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards