



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Ganged Waterless Well Hot Food Units - Portable Cart

- | | |
|--|----------------|
| ☐ EPW-3-CBPG/EPW-3-CBSS | 3 top openings |
| ☐ EPW-4-CBPG/EPW-4-CBSS | 4 top openings |
| ☐ EPW-5-CBPG/EPW-5-CBSS | 5 top openings |
| ☐ EPW-6-CBPG/EPW-6-CBSS | 6 top openings |

TOP:

- 16 gauge, 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"
- Stainless steel carving surface – drop brackets

Heat Compartments:


- 6 1/2" deep wells Dry operation only
- Includes Silicone bottom pad
- Fully Insulated wells
- Rope Element in each compartment
- ☐ 120, 208 or 240 volt A/C
- Single Phase standard

BODY AND INTERIOR SHELF:

- ☐ Stainless Steel body
- ☐ Painted body w/ choice of 12 powder coat colors
- Full bottom shelf to match body
- Stainless Steel Front Panel w/ Control screen
- 5" diameter casters w/ locks
- 2-1/2" wide heavy-duty polyvinyl bumper around base of unit
- 14 Ga. Stainless steel channels frame for bumper

Controls:

- Standard intuitive, easy to use touch screen control – One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity

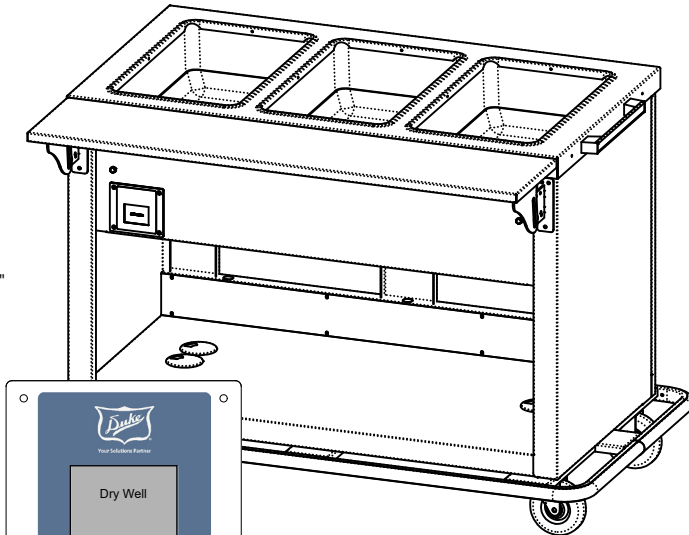

Model EPW-3-CB

OPTIONS:

- ☐ 14 gauge tops
- ☐ Adaptor plates
- ☐ 3-phase wiring
- ☐ Optional outlet for overhead LED lights
- ☐ 6', 8' or 10' Cord and plug
- ☐ Sliding Doors
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint in 12 colors
- ☐ Tray slides
- ☐ Work shelves
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

AGENCY LISTINGS:



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com





Specification subject to change



WARNING For CA residents: go to
www.dukemfg.com/prop65 for prop 65 warning


Thurmaduke®

Ganged Waterless Well Portable

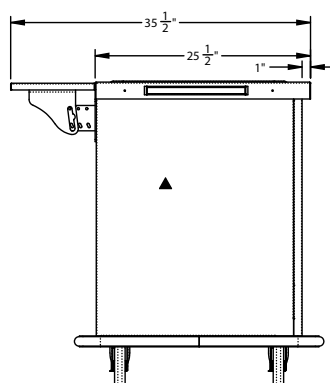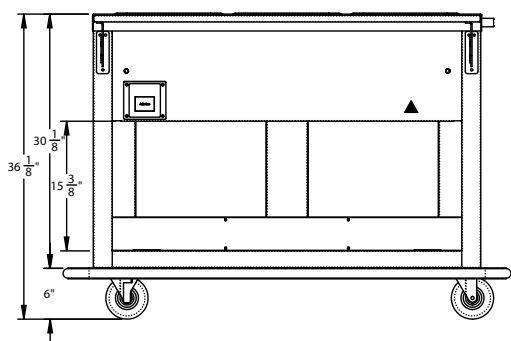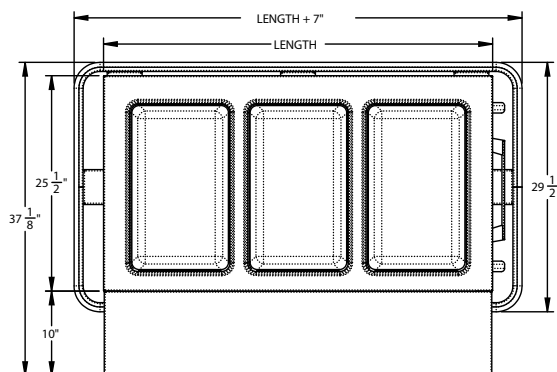


LEGEND
▲ ELECTRICAL CONNECTION

Control Specifications

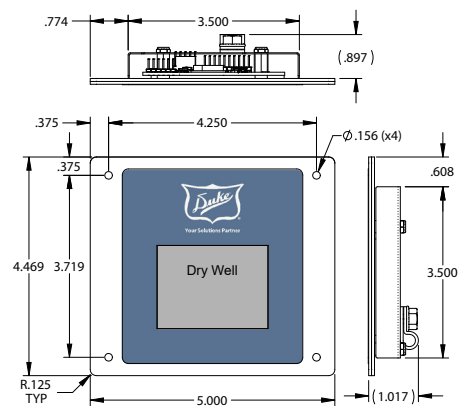

Control Cutout

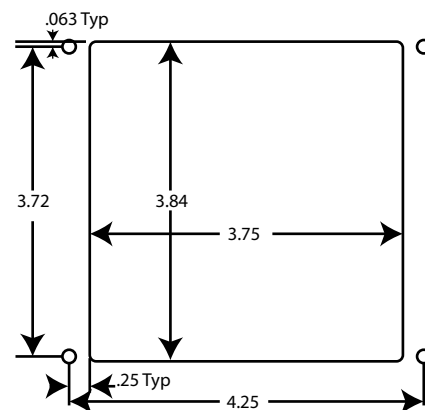

DIMENSIONS:

Model		Length		Width		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
EPW-3-CBPG	EPW-3-CBSS	46	116.8	35-1/2	90.2	36	91.4	3	39.6	345	156.8
EPW-4-CBPG	EPW-4-CBSS	60	152.4	35-1/2	90.2	36	91.4	4	51.2	420	190.9
EPW-5-CBPG	EPW-5-CBSS	74	188.0	35-1/2	90.2	36	91.4	5	62.3	505	229.6
EPW-6-CBPG	EPW-6-CBSS	88	223.5	35-1/2	90.2	36	91.4	6	74.3	605	275.0

FREIGHT CLASS: 150

ELECTRICAL SPECIFICATIONS:

Model	120 Volt - 665 watt			208 Volt - 500 watt			240 Volt - 665 watt		
	Watts	Amps	NEMA	Watts	Amps	NEMA	Watts	Amps	NEMA
EPW-3-CBPG/SS	2083	17.4	L5-30	1588	7.6	L14-20	2083	8.0	L14-20
EPW-4-CBPG/SS	2748	22.9	L5-30	2088	10.0	L14-20	2748	11.5	L14-20
EPW-5-CBPG/SS	3417	28.5	5-50	2592	12.5	L14-20	3417	14.2	L14-30
EPW-6-CBPG/SS	N/A			3092	14.9	L14-30	4082	17.0	L14-30



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A.
© 2025, Duke Manufacturing Co.