



Item: _____

Quantity: _____

Project: _____

Electric Thermostatic Griddle

Electric Series

Models: ☐ RTGE-12 ☐ RTGE-24 ☐ RTGE-36 ☐ RTGE-48 ☐ RTGE-60 ☐ RTGE-72



RTGE-36

Voltage: ☐ 208V ☐ 240V

Phase: ☐ 1 Phase ☐ 3 Phase

Standard Features

- 21" cooking depth
- 11" high, Low Profile
- Compact heavy gauge chassis for long life
- Stainless steel sides, control panel and ledge for easy cleaning
- Double wall panels for cooler sides
- Independent heating elements every 12", 3.4 KW each
- Energy saving thermostatic controls every 12" (200°-500°F)
- 4" wide S/S grease trough with large drain opening for easy cleaning
- Large 1 ½ gallon capacity S/S grease can
- 3/4" thick polished steel griddle plate
- 4" high adjustable heavy duty legs included

Options and Accessories

☐ Grooved griddle (specify width: _____")

☐ Chrome griddle plate

☐ Stainless Steel Equipment Stand

☐ Knock Down ☐ All Welded

Size

☐ 12" ☐ 24" ☐ 30" ☐ 36" ☐ 48" ☐ 60" ☐ 72"


☐ 5" swivel casters (set of four - 2 locking)

☐ 5" swivel casters (set of six - 3 locking)
(60" and 72" stands)



LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR

Electric Thermostatic Griddle

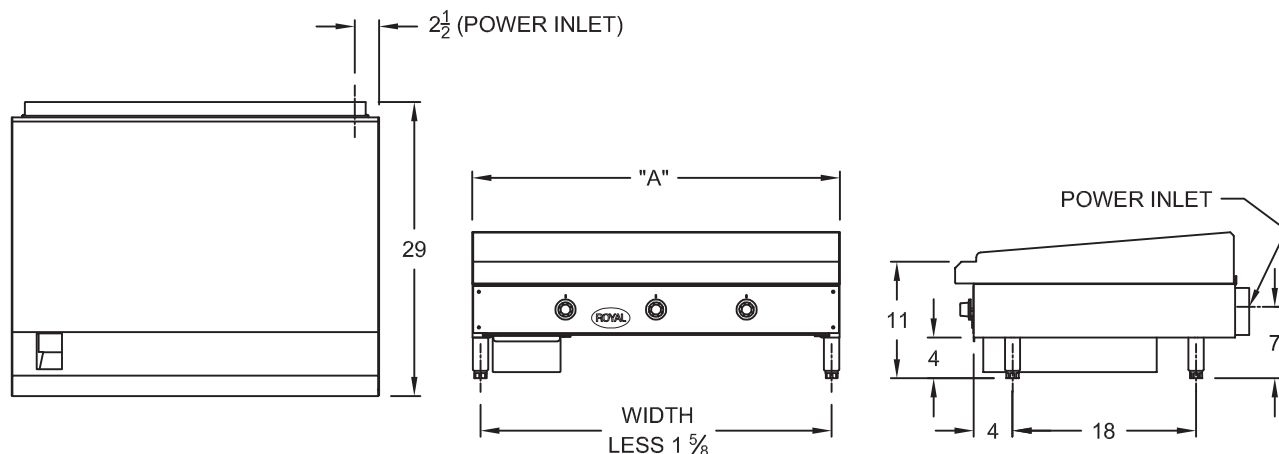

Model	Width (A)	Total KW	Voltage	MAX AMPS				
				1 Phase		3 Phase		
				Inlet 1	Inlet 2	Inlet 1	Inlet 2	Ship Wt.
RTGE-12	12"	3.4	208	17				140
			240	15				
RTGE-24	24"	6.8	208	33		16		210
			240	29		25		
RTGE-36	36"	10.2	208	50		29		290
			240	43		26		
RTGE-48	48"	13.2	208	66		39		370
			240	57		31		
RTGE-60	60"	17	208	50	50	29	29	460
			240	43	43	25	25	
RTGE-72	72"	20.4	208	50	50	29	29	540
			240	43	43	25	25	

60" and 72" units have two electrical inlets.

To be installed only in noncombustible surroundings. See installation instructions.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com