

Cuisine Series Heavy Duty Combination Top Ranges

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- | | | | |
|----------|----------|------------|------------|
| • C36-3R | • C36-3S | • C36-3-1R | • C36-3-1S |
| • C36-3C | • C36-3M | • C36-3-1C | • C36-3-1M |



Model C36-3R Range
 with 24" Griddle, Valve
 Controlled, and 12" Hot
 Top

Standard Features

- 12" 25,000 BTU/h (NG) Hot Top
- 24" griddle on the left only with 1" (25mm) thick steel plate
- Hi-lo valve control (-3-1)
- Griddle control, with embedded thermostat sensor bulb (-3-1)
- Low to 450°F (232°C) (-3-1)
- Stainless steel front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior
- R model - 4 rack positions
- C model - 3 rack positions
- R model - 1 chrome plated rack
- C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°- 260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Grooved Griddle - full
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Single or double deck high shelf or back riser
- Full-height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" NPT (Specify)
- Rear gas connection: 3/4", 1", 1 1/4" NPT (Specify)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extra oven rack
- Extension for 1/9 pans

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

Griddle Tops - 1" (25mm) thick steel plate griddle with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/h each. One burner per 12" (305mm) griddle section.


12" (305mm) Section Hot Tops - 25,000 BTU/h each burner with one per plate.

NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Combination Top Ranges

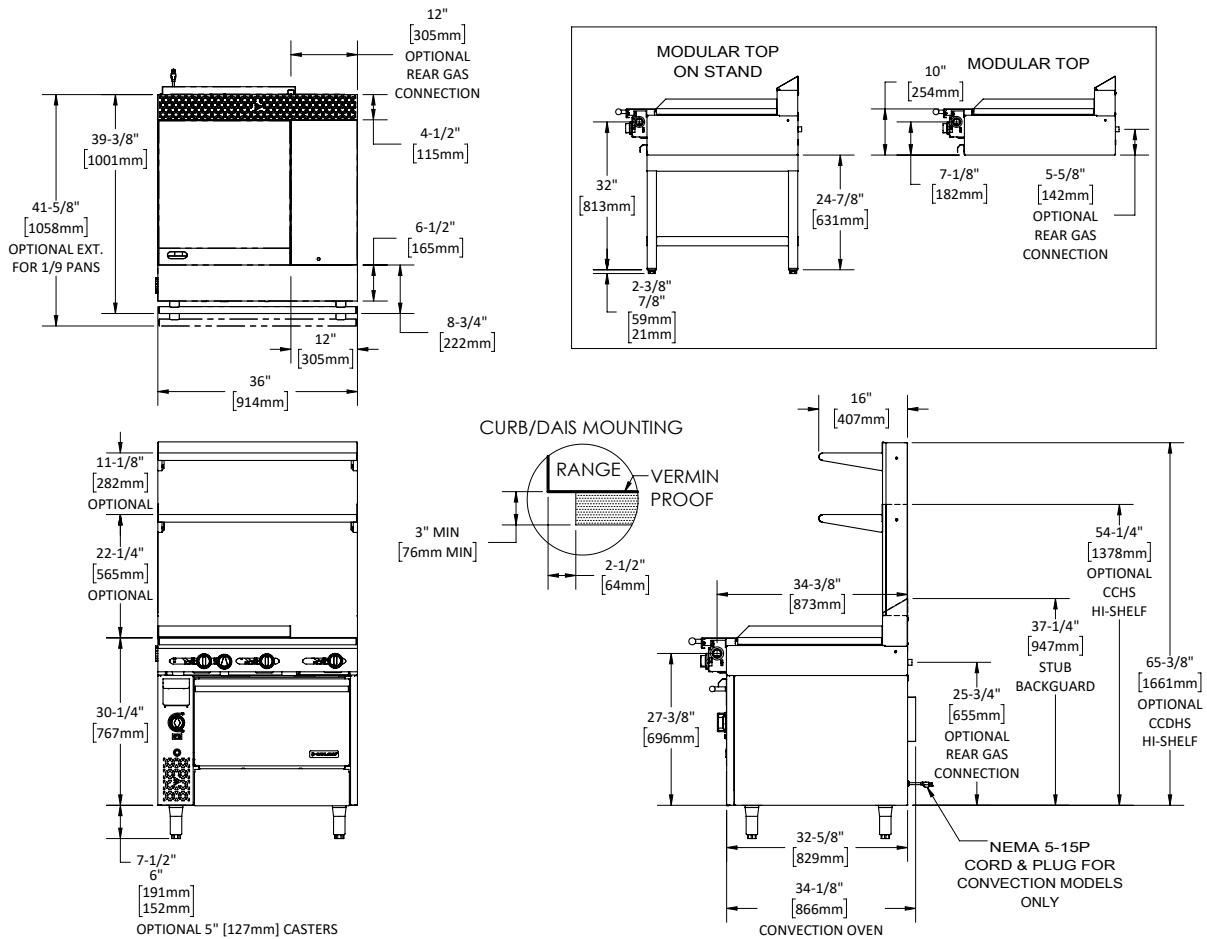

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping		Individual Burner Ratings (BTU/h)			
				Cu Ft	lbs/kg	Burner		NAT.	PRO.
C36-3R	36" Manual Valve Control Griddle Top - w/Standard oven	125,000	120,000	53	650/295	Hot Top		25,000	25,000
C36-3C*	36" Manual Valve Control Griddle Top - w/Convection oven	122,000	120,000	53	650/295	Griddle		30,000	30,000
C36-3S	36" Manual Valve Control Griddle Top - w/Storage Base	85,000	85,000	53	477/216	Standard Oven		40,000	35,000
C36-3M	36" Manual Valve Control Griddle - w/Modular Top	85,000	85,000	30	392/178	Convection Oven		37,000	35,000
C36-3-1R	36" Thermostat Control Griddle Top w/Standard Oven	125,000	120,000	53	650/295	Interior Dimensions: In (mm)			
C36-3-1C*	36" Thermostat Control Griddle Top w/Convection Oven	122,000	120,000	53	650/295	Product	Height	Width	Depth
C36-3-1S	36" Thermostat Control Griddle Top w/Storage Base	85,000	85,000	53	477/216	Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)
C36-3-1M	36" Thermostat Control Griddle Top w/Modular Top	85,000	85,000	30	392/178	Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)
						Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)
						Gas Pressure		NAT.	PRO.
						Minimum Supply		7" WC	11" WC
						Manifold Operating Pressure		6" WC	10" WC
						Gas Manifold 1-1/4" NPT			
*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug						Combustible Wall Clearance			
						Sides		Back	
						10" (254mm)		6" (152mm)	

*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7907
01/24

