

MEDIUM TEMP MODELS

- ☐ BEM-2-30CP
- ☐ BEM-3-30CP
- ☐ BEM-4-30CP
- ☐ BEM-5-30CP

LOW TEMP MODELS

- ☐ BEL-2-30CP
- ☐ BEL-3-30CP
- ☐ BEL-4-30CP
- ☐ BEL-5-30CP

Each model ships complete with all components needed for quick and easy installation.



BEM-4-30CP/BEL-4-30CP

- Self-contained refrigeration system*
- Black interior and exterior
- Mounted left and right-hand ends
- Top shroud for covering refrigeration system*
- Bumper assembly*

*Condensing unit, shroud and bumper assembly shipped loose.

FEATURES

CONSTRUCTION

- Front air CPreen blocks warm outside air for fewer required defrosts and greater energy efficiency
- Designed to fit through an 80" tall door opening
- Narrow footprint and shallow bumper for minimum intrusion into sales space
- Field installed 24 gauge steel shroud with finish matching cabinet exterior
- Condensing unit covered with fiberglass mat sound insulation
- Factory pre-wired for easy field connection. Only field wiring required is main power connection between condensing unit and merchandiser.
- Cam-locked panels on back, top and bottom for added strength and rigidity to the case
- 2-1/2" thick back wall, bottom, ends and partitions
- Baked-on polyester smooth steel finish on exterior and interior
- Five cantilever solid shelves with price tag molding per door
- Shelves rated to support 135 lbs. each
- Product stop prevents product from falling behind shelves
- Zero ODP insulation
- Standard electronic controller

DOORS

- 30" wide glass doors
- Self-closing door hinge with adjustable torsion control
- Standard black door and frame

REFRIGERATION

- Semi-self-contained refrigeration system
- Flexible refrigerant line-sets for easier installation
- EC fan motors are up to 65% more efficient than standard motors with less waste heat present inside the cold space
- Condensate evaporator and condensate pump provided
- Refrigerant: R-404A or R449A
- Factory tested refrigeration system
- Heavy-duty copper tube evaporator coil
- Electric defrost standard on low temp models
- Pre-mounted expansion valve
- Temperature range:
 - BEM models: 34° to 41°F (1° to 5°C)
 - BEL models: 0° to -15°F (18° to -26°C)
- R-factor (insulation efficiency rating): 20.0

WARRANTY

- Standard limited two year parts and labor on cabinet and condensing unit with five year coverage on compressor part



OPTIONS

- ☐ Anti-fog film on low temp Thermoseal® glass doors (factory applied) keeps doors clear even after opening


TECHNICAL SPECIFICATIONS

Models	BEM-2-30CP	BEM-3-30CP	BEM-4-30CP	BEM-5-30CP	BEL-2-30CP	BEL-3-30CP	BEL-4-30CP	BEL-5-30CP
Crated Weight (lbs) (kg)*	852 (387)	1472 (669)	1767 (803)	2097 (953)	1185 (539)	1425 (648)	1941 (882)	2113 (960)
Overall Height (in) (mm)**	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)	81-7/8 (2080)
Overall Width (in) (mm)	62 (1581)	92-7/16 (2354)	122-7/8 (3102)	153-5/16 (3900)	62 (1581)	92-7/16 (2354)	122-7/8 (3102)	153-5/16 (3900)
Overall Depth (in) (mm)***	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)	40-3/8 (1026)
Number of Doors	2	3	4	5	2	3	4	5
Number Of Shelves	10	15	20	25	10	15	20	25
Shelf Depth (in) (mm)	23 (584)	23 (584)	23 (584)	23 (584)	23 (584)	23 (584)	23 (584)	23 (584)
Product Facing (sq. ft.)	28.2	42.0	55.9	69.7	28.2	42.0	55.9	69.7
Pack-Out (cu. ft.)	54.1	80.6	107.1	133.7	54.1	80.6	107.1	133.7
Number Of Interior Lights	3	4	5	6	3	4	5	6


*Crated weight includes condensing unit.

Includes removable skid runner for installation purposes. Without runner: 79-3/4"H. **Add 20" for overhead shroud.

***Depth includes end panels, door handles and required rear piping stand-offs.

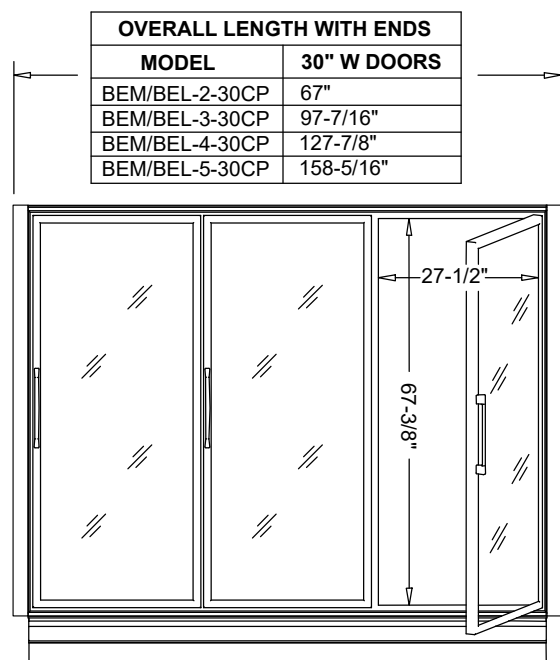

ELEVATION VIEW

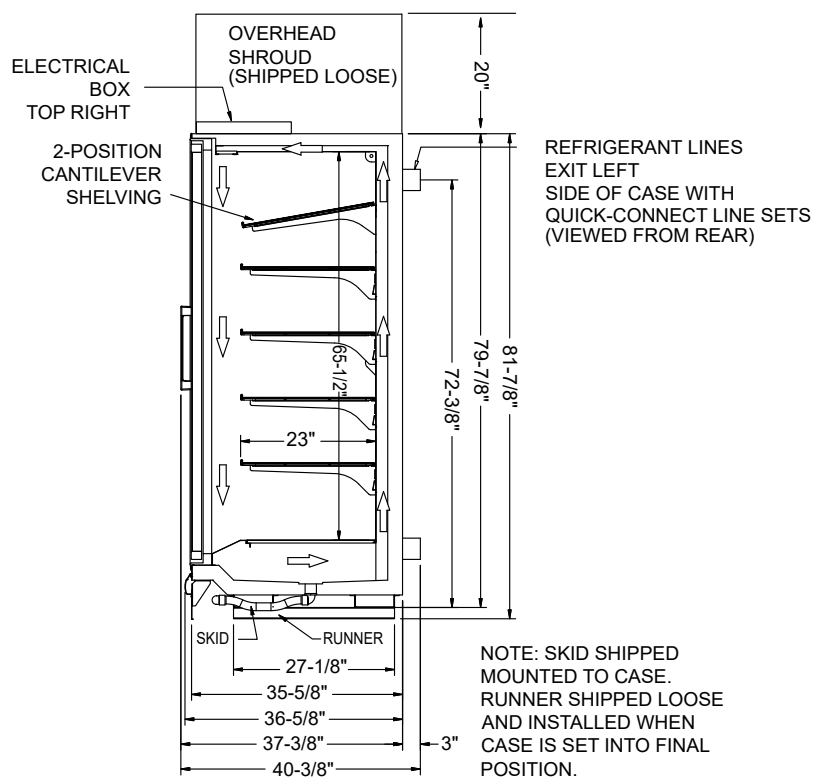

SIDE VIEW

CONDENSING UNIT CAPACITY & SYSTEM ELECTRICAL DATA (IN AMPS)

		2-DOOR	3-DOOR	4-DOOR	5-DOOR
FREEZER MERCHANDISERS	Condensing Unit Model	MSLD010EB-ENC	MSLD012EB-ENC	MSLD017EB-ENC	MSLD020EB-ENC
	Unit Capacity (BTUH)*	3125	4672	6733	8045
	ELECTRICAL DATA				
	Compressor RLA (Amps)	6.1	8.7	13.6	13.9
	Defrost Heaters (Amps)	6.1	9.1	12.2	15.2
	Anti-Sweat Heaters (Amps)	3.3	4.8	6.3	7.7
	Min. Circuit Amps	14.8	18.3	26.2	28.6
	Max. Overcurrent Protector	20.0	25.0	35.0	40.0
	Minimum Wire Gauge***	12.0	12.0	10.0	10.0

		2-DOOR	3-DOOR	4-DOOR	5-DOOR
COOLER MERCHANDISERS	Condensing Unit Model	MHMD002EB-ENC	MHMD002EB-ENC	MHMD003EB-ENC	MHMD003EB-ENC
	Unit Capacity (BTUH)**	3326	3326	4990	4990
	ELECTRICAL DATA				
	Compressor RLA (Amps)	3.0	3.0	3.8	3.8
	Anti-Sweat Heaters (Amps)	0.5	0.8	1.2	1.5
	Min. Circuit Amps	10.9	11.1	12.4	12.6
	Max. Overcurrent Protector	15.0	15.0	15.0	15.0
	Minimum Wire Gauge***	12.0	12.0	12.0	12.0

Notes:

*Rated at -20°F SST, 80°F ambient temperature

**Rated at +25°F SST, 80°F ambient temperature

***208-230V 4-wire power supply required

LISTINGS



HOOK UP

Hardwire.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications within this publication subject to change without notice.