DISPLAY REFRIGERATOR

Model: 2RSNSGD

Natural Refrigerant R-290 Model

2-Section Display Reach-In Refrigerator with Sliding Glass Doors Shallow Depth

2RSNSGD - Stainless steel front, aluminum end panels and interior
2RSNSASGD - Stainless steel exterior, aluminum interior
2RSNSSSGD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.

Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Adjustable legs
Additional epoxy coated steel shelves	Expansion valve
Chrome or stainless steel shelves	Special electrical requirements (consult factory)
Heavy duty pilaster strips	Wine rack

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

- Self contained, performance rated refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant[1]
- Automatic, electric condensate evaporator

CABINET ARCHITECTURE

- 3” non-CFC polyurethane foam insulation
- Double-pane, tempered sliding glass doors
- Snap in door wiper
- Door locks
- Self-closing doors
- High efficiency Black PVC frame
- Heavy duty, epoxy coated steel shelves
- 5” casters

MODEL FEATURES

- LED interior lighting
- Electronic control, off cycle defrost

[1] R-290 refrigerant meets all federal and state regulatory requirements.

Continental® Refrigerator

WARRANTY 6 Year Parts & Labor 7 Year Compressor

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	32 (906 cu l)
Width, Overall (inches)	52 (1321 mm)
Depth, Overall (inches) (including grill)	27 7/8 (708 mm)
Depth (inches) (less grill)	25 7/8 (657 mm)
Clear Door Width (inches)	17 3/4 (451 mm)
Clear Door Height (inches)	54 3/4 (1391 mm)
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)
Number of Doors	2
Number of Shelves	8
Shelf Area (square feet)	40.8 (3.8 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	8.4 (5.1)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	419 (190 kg)
Weight SS - Crated (pounds)	503 (229 kg)

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

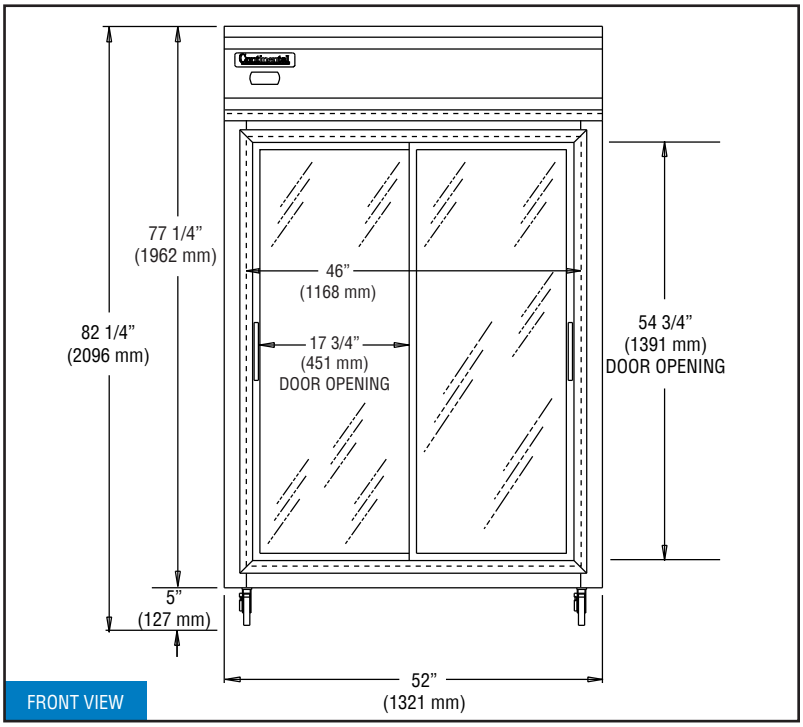

FRONT VIEW

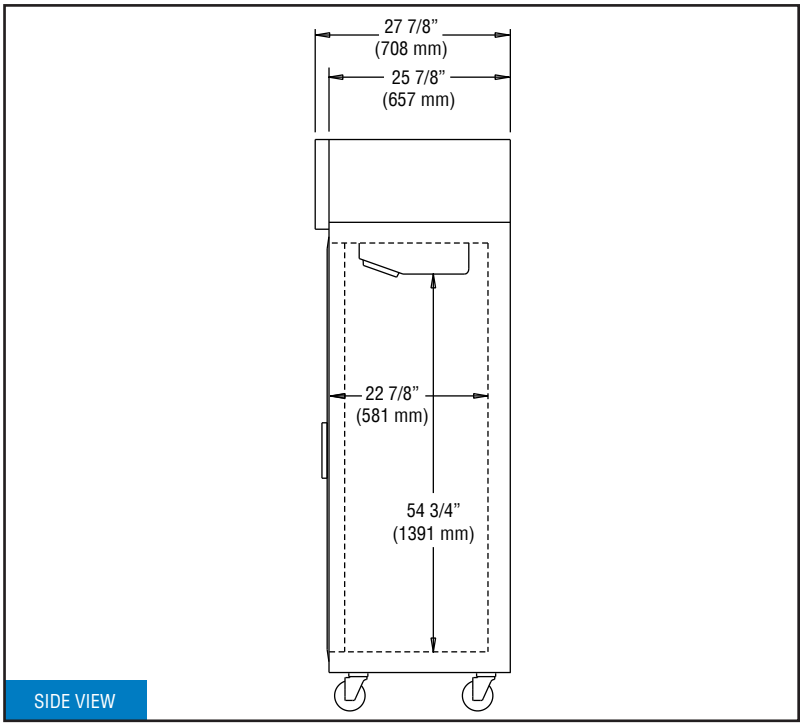

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A.

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 2/28/24