

MODEL # SCAS-SC-FLEX1

SPECIFICATIONS

Smartflex touchless technology is a patented revolutionary system of front vertical glass panels that activates by motion sensors which can automatically open and close on demand. Intelligence of the system can detect when a person is in front of unit which allows the doors to operate. Smartflex combines the advantages of quick & easy accessibility of doorless display units with the benefit of energy savings; up to 40% less energy consumption vs. open display cases. Automatic doors are silent and as you approach the unit, Smartflex opens quickly and efficiently without any loss of time. Available in a variety of sizes and configurations.

Available lengths: ☐ 39.1" ☐ 51.2" ☐ 76.2" ☐ 98.4"

Available depths: ☐ 33.5"

Available heights: ☐ 80.7"



STANDARD FEATURES

- RAL 9005 black powder coat interior and exterior
- Electronic controller with display
- High Efficiency 4000K LED canopy lighting
- Glass end panels
- 5 shelves with 4000K LED lights
- One ticket holder strip per shelf
- Casters
- Adjustable sensor & timer
- Equipped with safety mechanism to prevent door closure
- Condensate evaporation Included
- R290 refrigeration system


OPTIONAL ACCESSORIES

- ☐ Interior / exterior / side panels available in stainless steel in lieu of powder coat (polished or satin / stainless steel)
- ☐ Additional powder coat colors available (contact factory)
- ☐ Solid or mirrored end panels in lieu of glass
- ☐ Remote version available
- ☐ 4 adjustable feet
- ☐ Advanced monitoring system
- ☐ Optional LED lighting of 3000K or 5700K
- ☐ Removable front grid
- ☐ Magnetic condenser filter
- ☐ Dividers for well and shelves
- ☐ Inclined top mirror to showcase items
- ☐ Hook bar at top for hanging
- ☐ Selection of ticket strips
- ☐ Separate light cable
- ☐ Remote monitoring system






MODEL	L	D	H	VOLT	AMPS	WT	Refrig.
SCAS39R-SC-FLEX1	39.1"	33.5"	80.7"	230V	8	385	R290
SCAS51R-SC-FLEX1	51.2"	33.5"	80.7"	230V	8	445	R290
SCAS76R-SC-FLEX1	76.2"	33.5"	80.7"	230V	16	585	R290
SCAS98R-SC-FLEX1	98.4"	33.5"	80.7"	230V	16	750	R290



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

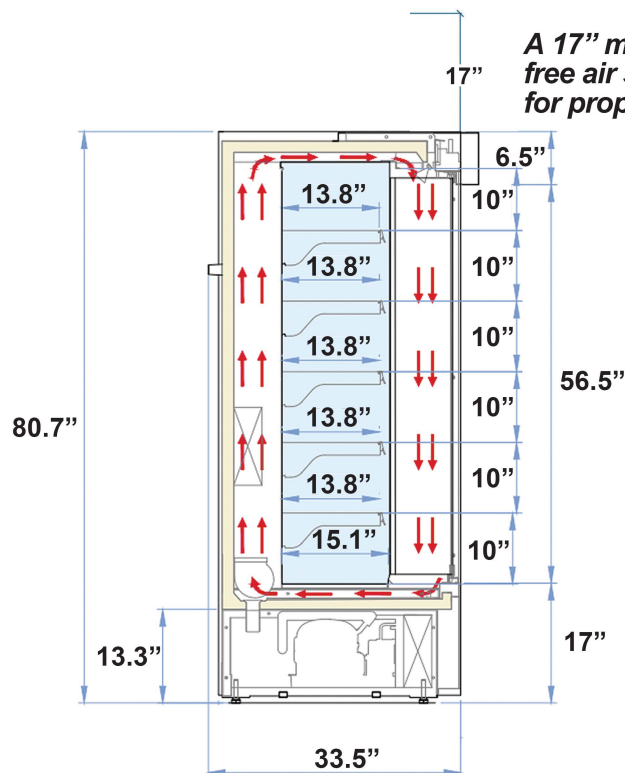

A 17" minimum of unobstructed free air space needed above unit for proper ventilation

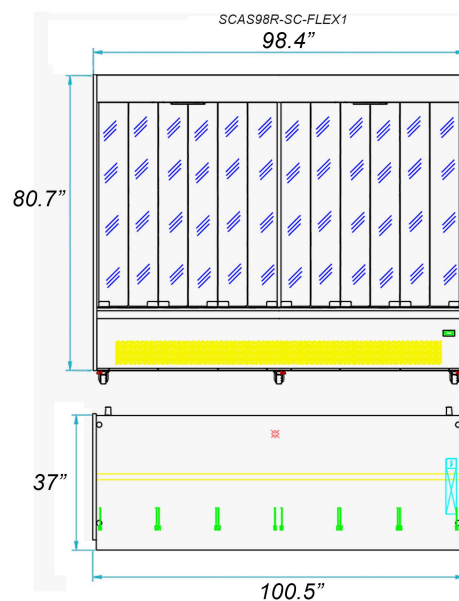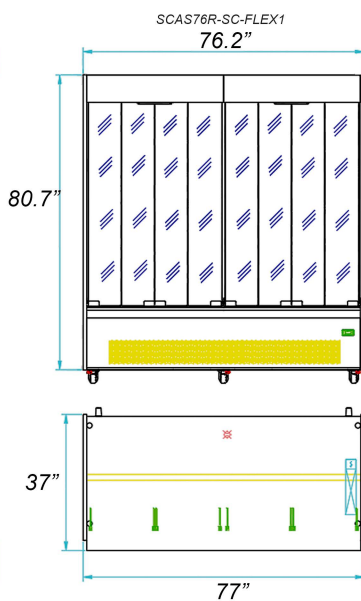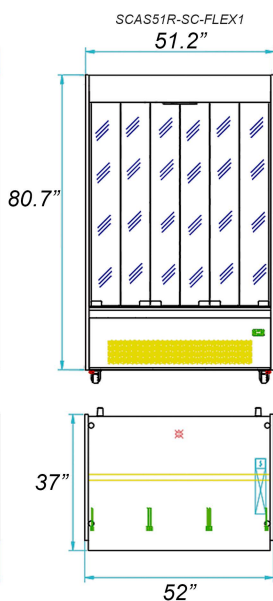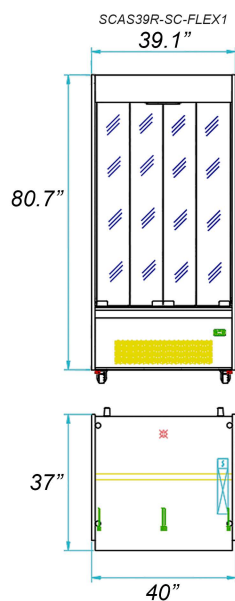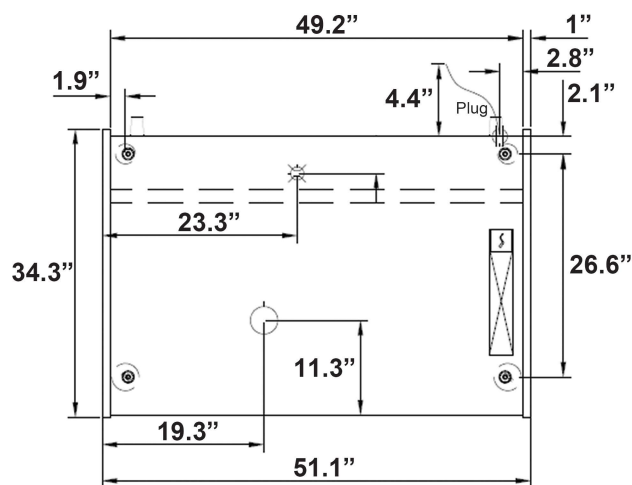

RPI in line with it's policy to continually improve it's product reserves the right to change materials and specifications without notice.