




CONVECTION OVEN

SINGLE CAVITY

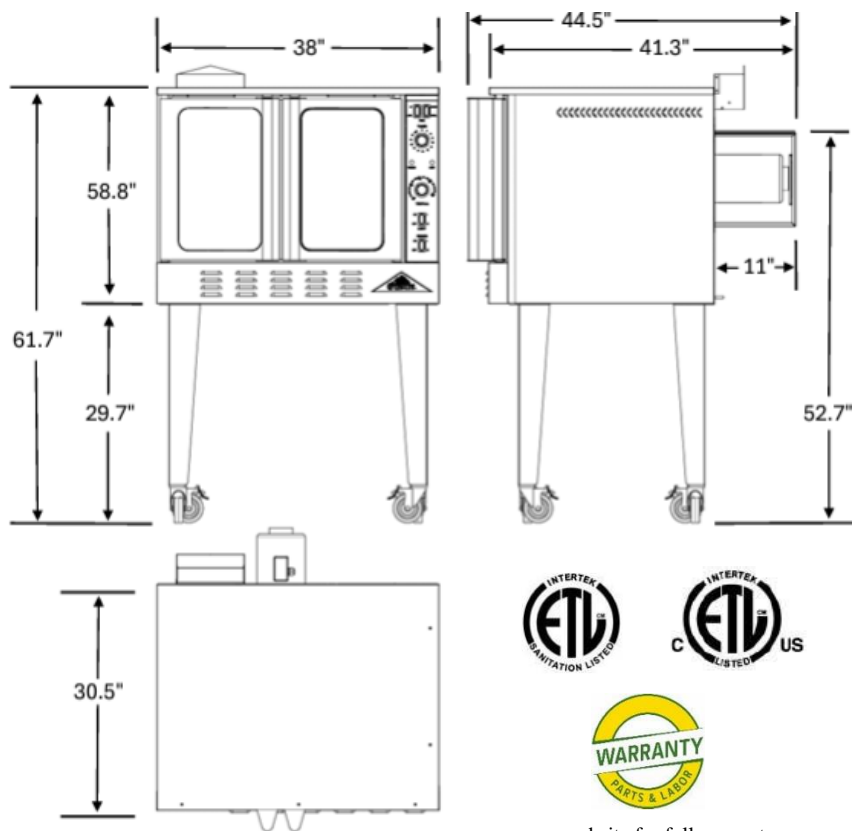

see website for full warranty



Model CCCO-1
shown with standard casters

Standard Features & Benefits

CONSTRUCTION: Heavy gauge steel framing. Independently operated stainless steel doors with double pane glazed windows, stainless steel front. No sag insulation for efficient operation. Heavy angular legs with casters only.

CONTROLS: Automatic ignition, solid state temperature control, 120 volt, 60 Hz, 1 phase grounded circuit, 6' cord with 3 prong plug, 6.5 amps total draw. NEMA 5-15 plug.

OVEN: Easy cleaning porcelain cavity, 5 racks with 10 rack positions. 2 interior oven lights, 2 speed, hi / low oven blower motor, ½ horsepower. 54,000 BTU's, ¾" gas connection. Gas conversion kit included.

TESTING: Optimal pressure is 5" WC for natural gas, 10" WC for propane. cCSAus design & CSA Sanitation (ANSI-NSF4) certified.

| Model # | Packing Size Centimeters | Appliance size Centimeters | Net Wgt. Lbs / Kg. | Gross Wgt. Lbs / Kg. |
|----------|--------------------------|----------------------------|--------------------|----------------------|
| | Inches w. x d. x h. | Inches w. x d. x h. | | |
| CS-GCO-1 | 107 x 119 x 99 | 97 x 114 x 163 | 400 / 182 | 525 / 239 |
| | 42 x 47 x 39 | 38 x 45 x 64 | | |



WARNING: This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to: www.P65Warnings.com




Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301
Tel.: 217-223-5070 • Fax.: 217-223-0007 • Web: www.castlestove.com





CONVECTION OVEN DOUBLE CAVITY

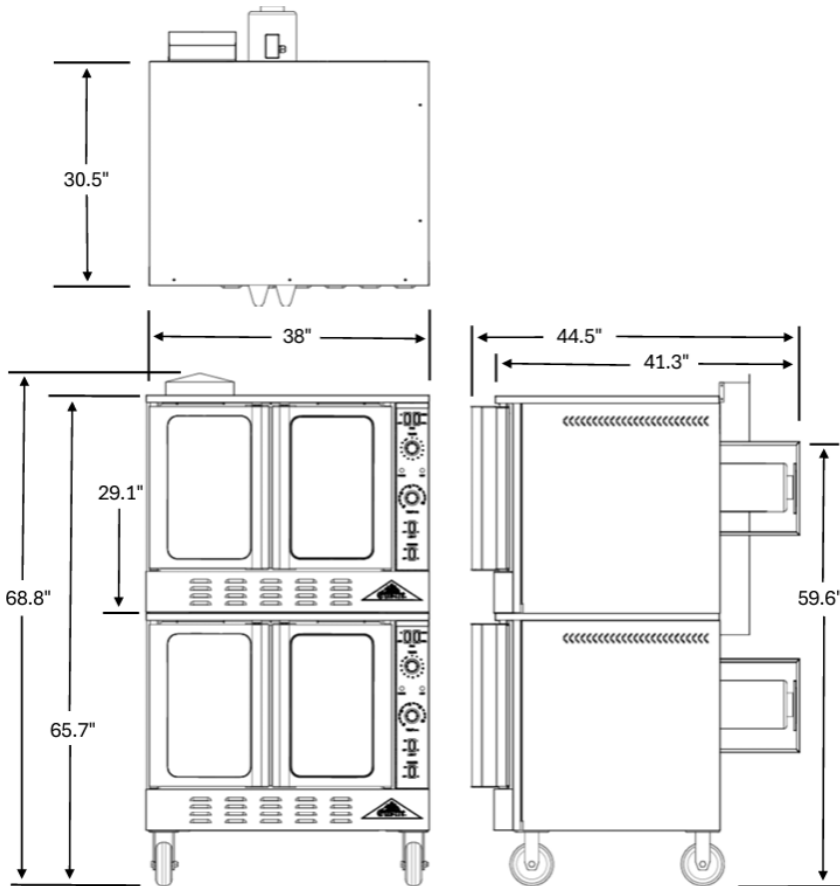

see website for full warranty



WARNING: This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to: www.P65Warnings.com

Standard Features & Benefits

CONSTRUCTION: Heavy gauge steel framing. Independently operated stainless steel doors with double pane glazed windows, stainless steel front. No sag insulation for efficient operation. Heavy casters only.

CONTROLS: Automatic ignition, solid state temperature control, 120 volt, 60 Hz, 1 phase grounded circuit, (2) 6' cords with 3 prong plug, 6.5 amps total draw. NEMA 5-15 plug.

OVENS: Easy cleaning porcelain cavity, 5 racks per cavity, each with 10 rack positions. 2 interior oven lights per oven, 2 speed, hi / low oven blower motors, ½ horsepower. 108,000 total BTU's, (2) ¾" gas connections. Gas conversion kit included.

TESTING: Optimal pressure is 5" WC for natural gas, 10" WC for propane. c CSA us design & CSA Sanitation (ANSI-NSF4) certified.

CS-GCO-2 is 2 separate units, specs represent each separate unit!

| Model # | Packing Size centimeters ----- inches w. x d. x h. | Appliance size centimeters ----- inches w. x d. x h. | Net Wt.. each crate Lbs / Kg. | Gross Wt.. each crate Lbs / Kg. |
|--------------|--|--|---|---|
| CS- GCO-2 | 107 x 119 x 99 | 97 x 114 x 163 | 400 / 182 | 525 / 239 |
| | 42 x 47 x 39 | 38 x 45 x 64 | 800 lbs total | 1050 lbs total |



Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301
Tel.: 217-223-5070 • Fax.: 217-223-0007 • Web: www.castlestove.com

