

# U.S. Range

## U-Series 60" Raised Griddle/Broiler Gas Range with Convection Oven

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_

CSI Section 11400

Approved \_\_\_\_\_

Date \_\_\_\_\_

### Models

- U60-6R24CC
- U60-6R24CR
- U60-6R24CS



Model U60-6R24CC

### Standard Features

- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel backguard, w/  
removable stainless steel shelf
- 12" (305mm) section stamped drip  
trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large, heavy-duty knobs
- Gas regulator
- Easy to access oven pilot
- Reinforced chassis
- Ergonomic split cast-iron top ring  
grates
- Powerful 32,000 BTU/9.37 kW, 2-piece  
cast-iron geometric open top burner
- 24" (610mm) raised griddle/broiler  
section on right side only w/ 3 cast-  
iron burners each rated 11,000  
BTU/3.22 kW, w/ one manual hi/lo  
valve per burner
- Two broiler rack settings at 3 3/4"  
(95mm) and 2 1/2" (64mm)
- 5/8" (15mm) thick steel griddle plate  
w/ manual hi/lo valve control, 23"  
(584mm) working depth surface,  
standard on right, optional on left
- 4-1/4" (108mm) wide grease trough
- Convection oven w/ 3 nickel-plated  
oven racks and removable rack guides  
w/ 1/3HP 120v 60 Hz single-phase fan  
motor
- Snap-action modulating oven

thermostat low to 500° F

- Large oven w/ porcelain ribbed  
bottom door, aluminized steel top,  
sides and back
- Square door design with strong,  
"keep-cool" oven door handle
- Open storage in lieu of oven, (suffix S)

### Options & Accessories

- Convection oven motor 240v 50/60HZ  
single-phase
- Hot top 12" (305mm) plate in lieu  
of two open burners, manual valve  
controlled w/ 18,000 BTU/5.27 kW  
cast-iron "H" burner standard on left  
side
- Low profile 9-3/8" (238mm) backguard  
stainless steel front and sides
- Additional oven racks
- Four 6" (152mm) levelling swivel  
casters w/ front locking
- Flanged deck mount legs
- Celsius temperature dials

### Specifications

Gas restaurant series range with large capacity convection oven. 59-1/16" (1500mm) wide, 27" (686mm) deep work top surfaces.

Stainless steel front, sides and 5" wide front rail. 6" (152mm) legs with adjustable feet.

Six powerful 2-piece 32,000 BTU/9.37 kW (Natural Gas), cast-iron open burners set in split cast-iron ergonomic grates.

24" (610mm) raised griddle/broiler section on right side only with 3 cast-iron burners each rated a 11,000 BTU/3.22 kW.

Optional hot-top with cast-iron "H" style burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven bottom and door liner and heavy-duty, "keep-cool" door handle.

Oven controlled by even bake, fast recovery snap-action modulating oven thermostat.

Available with storage base in lieu of oven.

NOTE: Use only Garland certified casters and approved restraining devices.



## U-Series 60" Raised Griddle/Broiler Gas Range with Convection Oven

Garland Commercial Ranges Ltd.  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA


General Inquires 1-905-624-0260  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668

[www.garland-group.com](http://www.garland-group.com)  
8110A  
08/25

  
an All Group Company

# U.S. Range

## U-Series 60" Raised Griddle/Broiler Gas Range with Convection Oven

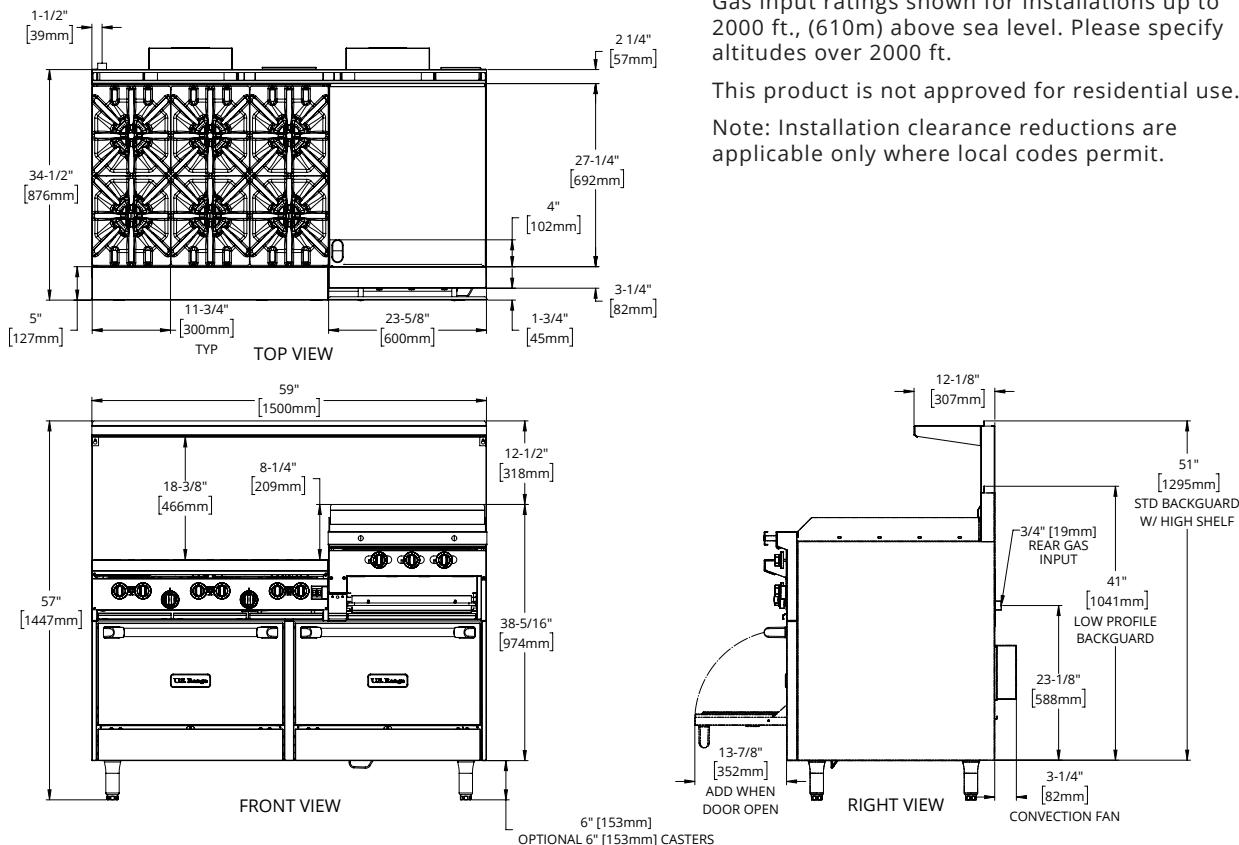

Model Number	Open Burners	Total BTU/Hr	Ship Information			
			Natural	Lbs.	Kg	Cu Ft
U60-6R24CC	6 Open Burners, 24" Raised Griddle/Broiler w/ (2) Convection Ovens	301,000	828	376	81	
U60-6R24CR	6 Open Burners, 24" Raised Griddle/Broiler w/ (1) Convection Oven & (1) Standard Oven	301,000	828	376	81	
U60-6R24CS	6 Open Burners, 24" Raised Griddle/Broiler w/ (1) Convection Oven & Storage Base	263,000	787	357	81	

Width In (mm)	Depth In (mm)	Height w/shelf In (mm)	Oven Interior-in (mm)			Combustible Wall Clearance-In (mm)		Entry Clearances In (mm)		Manifold Operating Pressure	
			Height	Depth	Width	Sides	Rear	Crated	Uncrated	Natural	Propane
59-1/16 (1500)	38-1/2 (974)	57 (1448)	13 (330)	22 (559)	26-1/4 (667)	14 (356)	6 (152)	37 (940)	36-1/2 (927)	4.5" WC 11 mbar	10" WC 25 mbar

Burner Ratings (BTU/Hr/kW)			
Gas Type	Open Top	Griddle/Hot Top	Standard Oven or Convection Oven
Natural	32,000/9.37	18,000/5.27	38,000/11.13
Propane	26,000/7.61	18,000/5.27	32,000/9.38

Note: Convection ovens with 120V, 60 Hz, 1-phase, 3.4 amps motors are supplied with 6'1829mm cord and plug (NEMA 5-15P); 240V, 50/60 Hz, 1-phase motors are not supplied with cord and plug and must have direct connect.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

General Inquires 1-905-624-0260  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668

[www.garland-group.com](http://www.garland-group.com)  
8110A  
08/25

 **WELBILT**  
an All Group Company