GARLAND

Cuisine Series Heavy Duty 18" Add-A-Unit

Project	
Item	
Quantity	
CSI Section 11400	
Approved	
Data	
l Date	

Models

- C18-7S
- C18-7M



Model C18-7S 18" Add-A-Unit Open Burners

Standard Features

- Two 40,000 BTU/h (NG) Garland Starfire open top burners
- One-piece cast iron grates and bowls over each open top burner
- · Stainless steel front and sides
- Stainless steel front rail
- Stainless steel burner box1-1/4" NPT front gas manifold
- Can be installed individually or in a
- battery7" (178mm) high stainless steel stub
- 6" (152mm) stainless steel adj. legs
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Single or double deck high shelf or back riser
- Full-height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Rear gas connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extension for 1/9 pans

Specifications

Garland Cuisine Series Add-A-Unit, Model _____ with total BTU/h rating _____ when used with natural/propane gas. Stainless steel finish & 6" (152mm) legs w/adjustable feet.

Open Burners - 40,000 BTU/h burner and a one piece grate and bowl over each burner.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.












GARLAND°

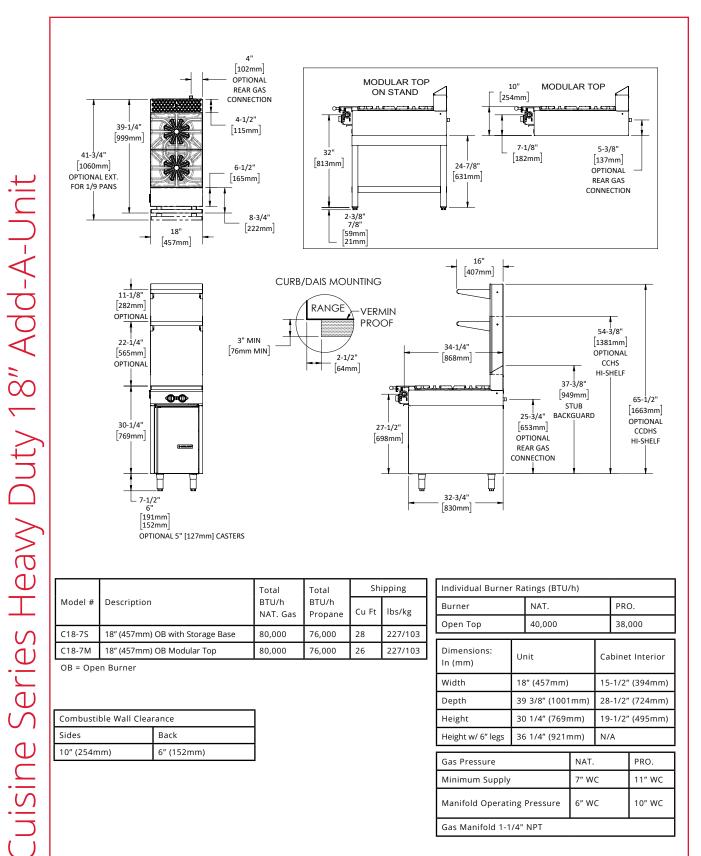

		Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
Model #	Description			Cu Ft	lbs/kg
C18-7S	18" (457mm) OB with Storage Base	80,000	76,000	28	227/103
C18-7M	18" (457mm) OB Modular Top	80,000	76,000	26	227/103

OB = Open Burner

Combustible Wall Clearance		
Sides	Back	
10" (254mm)	6" (152mm)	

Individual Burner Ratings (BTU/h)		
Burner	NAT.	PRO.
Open Top	40,000	38,000

Dimensions: In (mm)	Unit	Cabinet Interior	
Width	18" (457mm)	15-1/2" (394mm)	
Depth	39 3/8" (1001mm)	28-1/2" (724mm)	
Height	30 1/4" (769mm)	19-1/2" (495mm)	
Height w/ 6" legs	36 1/4" (921mm)	N/A	

Gas Pressure	NAT.	PRO.
Minimum Supply	7" WC	11" WC
Manifold Operating Pressure	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

Garland reserves the right to make changes to the design or specifications without prior notice.

