



Model #

STC-RIR-1
STC-RIR-2

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Top Mount Reach In Solid Door Refrigerator



Shown: STC-RIR-2

Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: stainless steel. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Freezer is top mount condensing unit with capillary tube system, freezer temperature ranges -1° to -7°F. Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. Freezer door frames to have foam-in place heater wire. All single door units are field reversible. Doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Uni-body construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL Listed and ETL Sanitation Listed.

FEATURES LIST

- Solid state thermostat w/ digital display
- Full length stainless handles
- Exterior stainless steel front and sides
- Interior stainless steel w/LED interior lights
- Field reversible 1-door unit
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions 2 door unit
- Environmentally friendly R290
- EZ slide out condenser
- Heater in condensate pan
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides, 2" rear
- 5.0 Energy Star Approved
- **WARRANTY: 2 Years Parts and Labor and additional 3 Years on Compressor.**

*Not suitable for installation in a non-commercial or residential applications.

Certified To ANSI/ NSF 7 Standards



Intertek



Intertek




Specifications are subject to change without notice

Approvals _____



PLAN VIEW

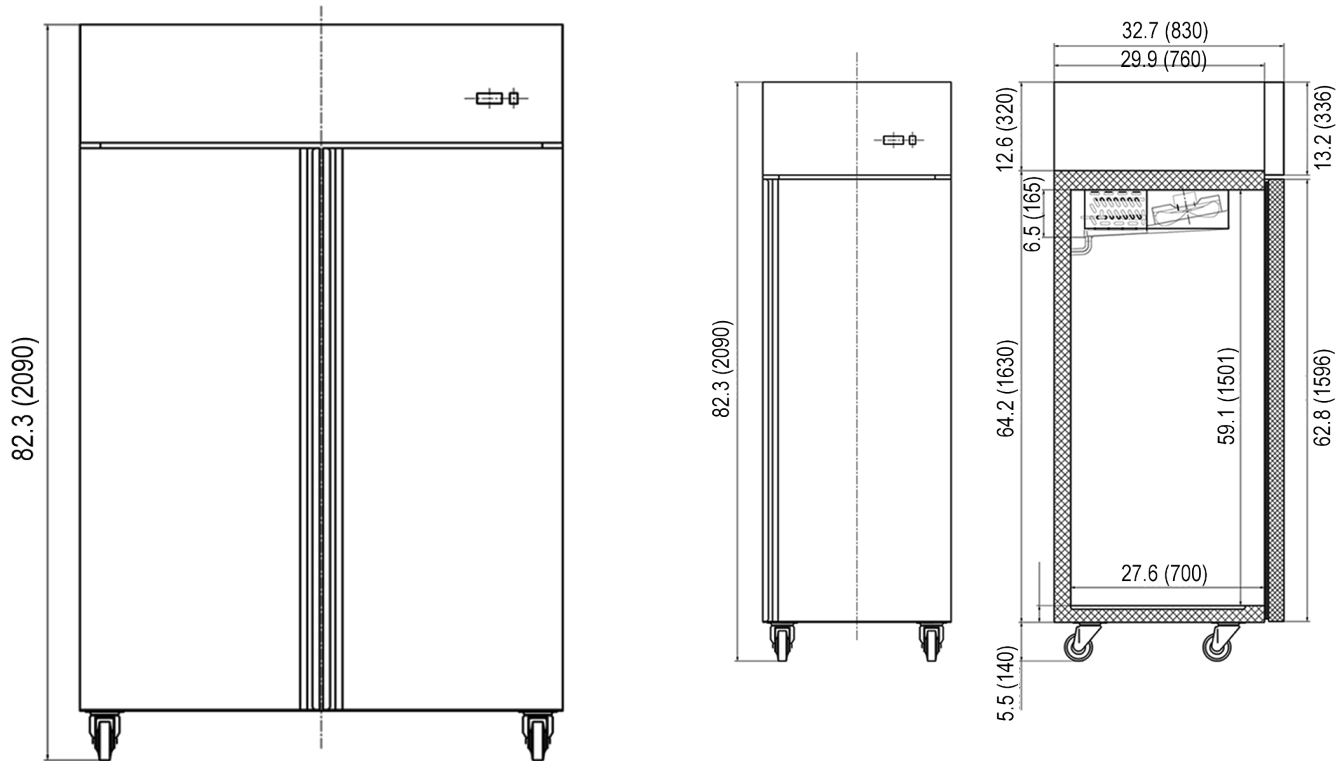

DIMENSIONAL DATA

STC-RIR-1

Capacity:
 1 swing door and 3 shelves

Dimensions:
 Overall Length = 27"
 Overall Depth = 34.3"
 Overall Height = 82.3"

HP: 1/5 **BTU:** 1670
Voltage: 115/60/1 **Amps:** 3.0
NEMA Plug: 5-15P
Cord Length: 10

Shipping Information:
 Crated Weight: 350 lbs.

STC-RIR-2

Capacity:
 2 swing doors and 6 shelves

Dimensions:
 Overall Length = 54"
 Overall Depth = 34.3"
 Overall Height = 82.3"

HP: 1/4 **BTU:** 2380
Voltage: 115/60/1 **Amps:** 4.5
NEMA Plug: 5-15P
Cord Length: 10

Shipping Information:
 Crated Weight: 518 lbs.