

3 YEARS
WARRANTY
PARTS & LABOR

SPIKA MS 1000










208-230 V / 60 Hz

MODULAR ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H	 70°F/20°C 50°F/10°C lbs (Kg)	 90°F/32°C 70°F/21°C lbs (Kg)	 in (mm)	 in (mm)	 SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions	 SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA MS 1000 A		970 (440)	730 (331)	Width 30" (762) Depth 24.41" (620) Height 29.92" (760)	Width 34.41" (874) Depth 25" (635) Height 32.92" (836)		
SPIKA MS 1000 W		974 (442)	915 (415)				

ACCESSORIES

INCLUDED



SCOOP


NOT INCLUDED




DOUBLE 11" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS112



11" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS11



STACKING KIT



ADAPTER PLATES



SCALE KLEEN

RECOMMENDED BINS



S500
+
1 | 2 SPIKA
MS1000R

S750
+
1 | 2 SPIKA
MS1000R

S900
+
1 | 2 SPIKA
MS1000R

S1050
+
1 | 2 SPIKA
MS1000R

SCS350
+
1 | 2 SPIKA
MS1000R

SCS700
+
1 | 2 SPIKA
MS1000R


SCD900
+
1 | 2 SPIKA
MS1000R

SCD1400
+
1 | 2 SPIKA
MS1000R

SCD1800
+
2 SPIKA
MS1000R

TECHNICAL SCHEME

SPIKA MS 1000

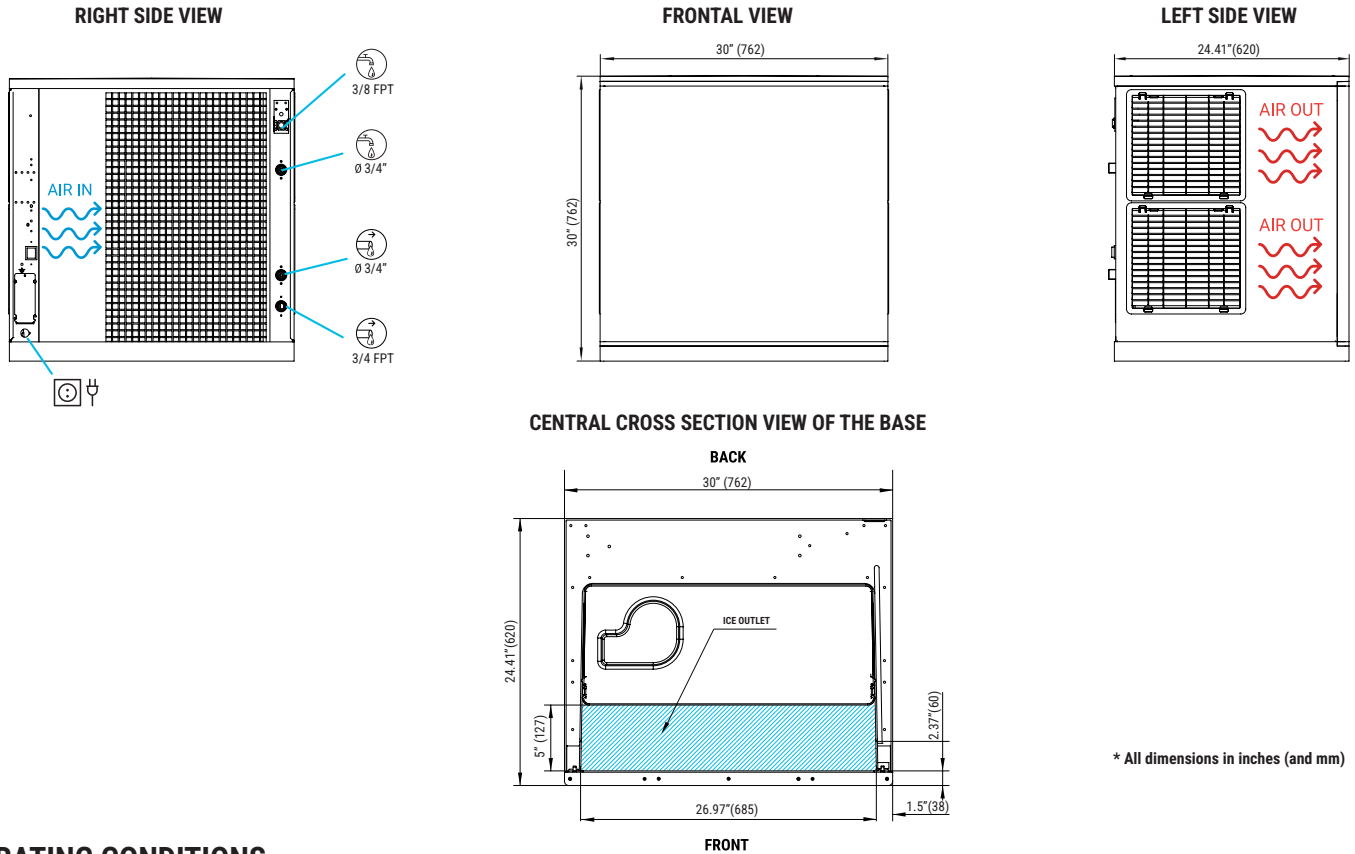

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) / 87 psi (6 bar)

400/800 Ice cubes/cycle

V	Hz	ph
230	60	1N

FULL DICE

SPIKA MS 1000 AIR COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	986	890	792	707
68° 21°	970	862	766	683
90° 32°	919	825	730	652
109° 43°	875	787	698	623

FULL DICE

SPIKA MS 1000 WATER COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	991	969	946	924
68° 21°	974	937	915	892
90° 32°	924	901	872	849
109° 43°	879	856	834	810

MODELS

	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	Water Usage / 100 lbs. 45.4 kgs. of ice (gal) (L)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
SPIKA MS 1000 A	17,586 5,154	1,540	12/2.5 3	16	4.43	14.8 55.9	12,024 3,524	231	243
SPIKA MS 1000 W	17,586 5,154	1,540	12/2.5 3	16	3.7	14.8 55.9	12,024 3,524	231	243

*Water-cooled Condenser Water Usage / 100 lbs. / 45.4 kgs. Of Ice: 51.8 gal / 196.42 L.



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR
Read our warranty policy to know more about limitations and exclusions

