{10.65}

Super Erecta® Wire Shelving Mobile Units – Metroseal® Green

Metroseal® Green shelving units are engineered for robust, adaptable storage in wet or high-humidity environments. Mobile units include shelves and four posts, two swivel and two swivel/brake standard polymer casters. Each shelf is finished with a Metroseal Green epoxy coating that includes built-in antimicrobial protection to inhibit bacteria, mold, and mildew growth. Posts are finished with the same Metroseal Green epoxy coating. The shelf has an open wire design that allows access from all sides and has mat ribs that run front to back for smooth product transfer. Each shelf has a heavy-gauge, all-welded carbon steel construction with longitudinal support trusses. On larger shelves, one or more longitudinal snake trusses provide added support. The mobile units support up to 900 lbs. (408 kg) evenly distributed per unit, while individual shelves hold 800 lbs. (363 kg) at lengths of 48" (1219 mm) or less and 600 lbs. (272 kg) when longer. Each unit features SiteSelect™ posts that have circular grooves on 1" (25 mm) increments. The posts are numbered every 2" (51 mm) and have double groove guides every 8" (203 mm) as a visual indicator during assembly. Shelving can be assembled easily without tools using patented tapered split sleeves. Shelves adjust at 1" (25 mm) intervals, and bolt levelers adjust to ensure the unit remains stable on uneven surfaces. These units are NSF listed.

4-Shelf Mobile Unit

5-Shelf Mobile Unit

Features and Benefits:

- **Mobile Shelving Units:** Include Metroseal Green shelves, (4) swivel casters (2 with brake and 2 without) and (4) posts under one easy-to-order model number.
- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel. Industrial grade stem casters withstand thresholds and daily movement.
- **Strong:** Unit load capacity: 900 lbs. (408 kg) evenly distributed. Maximum weight capacity per shelf evenly distributed: (48" [1219 mm] or shorter = 800 lbs. [363 kg]; longer than 48" [1219 mm] = 600 lbs. [272 kg])
- **Versatile:** Super Erecta Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect Posts have a double groove visual guide feature every 8" (203 mm), circular grooves at 1" (25 mm) increments, and are numbered at 2" (51 mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25 mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Brake Casters:** Rear pedal brakes stop the wheels from rotating. The unit can remain steady in place on even surfaces.
- **NSF Listed.**
- **Never Collapse Guarantee:** Each Metro stationary shelving unit, add-on shelving unit, mobile shelving unit and Track Shelving System are backed by a 100% money-back guarantee against unit collapse.

MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban® Products Company, Huntersville, NC. Microban® product protection does not by itself protect a user from food borne illness. Product must be routinely cleaned.

All Metro Catalog Sheets and our Never Collapse Guarantee Warranty are available on our website: **metro.com**

Information and specifications are subject to change without notice.
Please confirm at time of order.
Copyright © 2024 InterMetro Industries Corp.

metro.com
North Washington Street, Wilkes-Barre, PA 18705
Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: metro.com/contactus

{10.65} Super Erecta® Wire Shelving Mobile Units – Metroseal® Green

Material Specifications:

- **Wire Shelves:** Heavy-gauge carbon steel.
- **Posts:** 16-gauge carbon steel tube, 1" (25 mm) diameter.
  - **Split sleeve:** high impact polystyrene.
  - **Post cap:** polypropylene.
  - **Post insert:** cast zinc.
  - **Leveling bolt:** zinc-plated carbon steel.
- **Metroseal Green:** Electrostatically applied powder coating over a zinc substrate. Includes built-in Microban antimicrobial product protection.
- **Standard Polymer Casters (5PC, 5PCB):** Reinforced nylon rig with chromate plated stem and swivel, swivel ball bearings, Delrin axle bearings, and a TPU wheel tread. Brake version has a total lock brake which stops the wheel from rotating and the caster swivel from swiveling. Bumper is a non-phthalate PVC.
- **Temperature range (for entire unit):** Continuous use (with shelves under load): -20°F (-29°C) to 120°F (49°C)

All Super Erecta Metroseal Green Mobile units are equipped with four casters – two swivel and two swivel/brake – with reinforced nylon (polymer) caster rigs. Bumpers are included.

Caster Rating: Each caster is rated for 300 lbs. (135 kg).

Unit Load Capacity: The mobile shelving unit has a load capacity of 3X the caster load rating, which equals 900 lbs. (408 kg) evenly distributed.

5PC

5PCB

Part Number Explanation

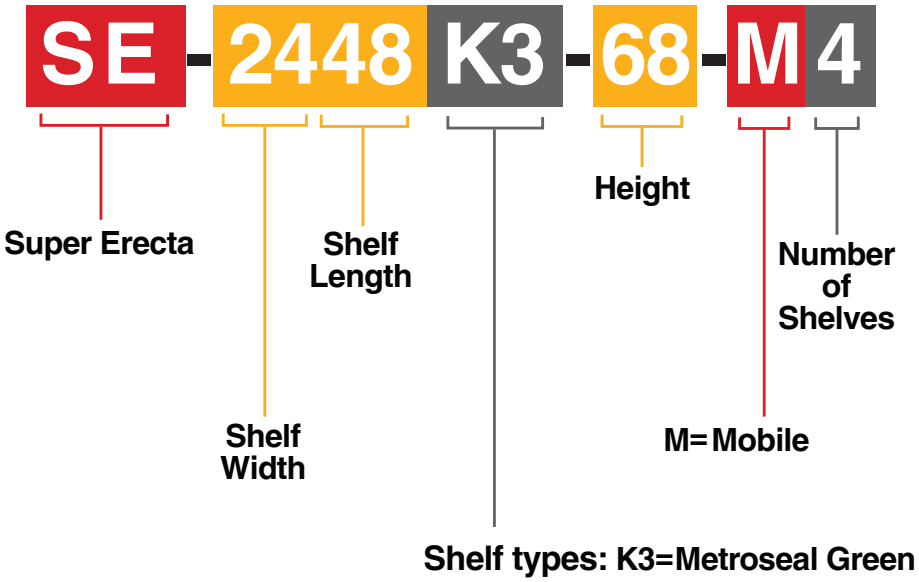

Mobile Shelving Units

UNIT HEIGHT		4-SHELF UNITS	5-SHELF UNITS
68"			
Nominal Width/Length (in.)	(mm)	Mobile Unit Cat. No.	Mobile Unit Cat. No.
18x24	457x610	**SE-1824K3-68-M4**	**SE-1824K3-68-M5**
18x30	457x760	**SE-1830K3-68-M4**	**SE-1830K3-68-M5**
18x36	457x914	**SE-1836K3-68-M4**	**SE-1836K3-68-M5**
18x42	457x1060	**SE-1842K3-68-M4**	**SE-1842K3-68-M5**
18x48	457x1219	**SE-1848K3-68-M4**	**SE-1848K3-68-M5**
18x54	457x1372	**SE-1854K3-68-M4**	**SE-1854K3-68-M5**
18x60	457x1524	**SE-1860K3-68-M4**	**SE-1860K3-68-M5**
18x72	457x1829	**SE-1872K3-68-M4**	**SE-1872K3-68-M5**
21x24	530x610	**SE-2124K3-68-M4**	**SE-2124K3-68-M5**
21x30	530x760	**SE-2130K3-68-M4**	**SE-2130K3-68-M5**
21x36	530x914	**SE-2136K3-68-M4**	**SE-2136K3-68-M5**
21x42	530x1060	**SE-2142K3-68-M4**	**SE-2142K3-68-M5**
21x48	530x1219	**SE-2148K3-68-M4**	**SE-2148K3-68-M5**
21x54	530x1372	**SE-2154K3-68-M4**	**SE-2154K3-68-M5**
21x60	530x1524	**SE-2160K3-68-M4**	**SE-2160K3-68-M5**
21x72	530x1829	**SE-2172K3-68-M4**	**SE-2172K3-68-M5**
24x24	610x610	**SE-2424K3-68-M4**	**SE-2424K3-68-M5**
24x30	610x760	**SE-2430K3-68-M4**	**SE-2430K3-68-M5**
24x36	610x914	**SE-2436K3-68-M4**	**SE-2436K3-68-M5**
24x42	610x1060	**SE-2442K3-68-M4**	**SE-2442K3-68-M5**
24x48	610x1219	**SE-2448K3-68-M4**	**SE-2448K3-68-M5**
24x54	610x1372	**SE-2454K3-68-M4**	**SE-2454K3-68-M5**
24x60	610x1524	**SE-2460K3-68-M4**	**SE-2460K3-68-M5**
24x72	610x1829	**SE-2472K3-68-M4**	**SE-2472K3-68-M5**

Actual Height: 68.3125" (1735 mm).
Actual dimensions are rounded to the nearest 1/16" (2 mm)
Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.
Actual Width and Length including casters without bumpers. Casters are swiveled inwards.
Width: Add 13/16" (0.8125") [21 mm] to nominal width. **Length:** Add 9/16" (0.5625") [14 mm] to nominal length.

Mobile Shelving Units

Consist of four or five Metroseal Green wire shelves,
four posts, and four casters (two casters with brake and two without).

Mobile Shelving Units

UNIT HEIGHT		4-SHELF UNITS	5-SHELF UNITS
80"			
Nominal Width/Length (in.)	(mm)	Mobile Unit Cat. No.	Mobile Unit Cat. No.
18x24	457x610	**SE-1824K3-80-M4**	**SE-1824K3-80-M5**
18x30	457x760	**SE-1830K3-80-M4**	**SE-1830K3-80-M5**
18x36	457x914	**SE-1836K3-80-M4**	**SE-1836K3-80-M5**
18x42	457x1060	**SE-1842K3-80-M4**	**SE-1842K3-80-M5**
18x48	457x1219	**SE-1848K3-80-M4**	**SE-1848K3-80-M5**
18x54	457x1372	**SE-1854K3-80-M4**	**SE-1854K3-80-M5**
18x60	457x1524	**SE-1860K3-80-M4**	**SE-1860K3-80-M5**
18x72	457x1829	**SE-1872K3-80-M4**	**SE-1872K3-80-M5**
21x24	530x610	**SE-2124K3-80-M4**	**SE-2124K3-80-M5**
21x30	530x760	**SE-2130K3-80-M4**	**SE-2130K380-M5**
21x36	530x914	**SE-2136K3-80-M4**	**SE-2136K3-80-M5**
21x42	530x1060	**SE-2142K3-80-M4**	**SE-2142K3-80-M5**
21x48	530x1219	**SE-2148K3-80-M4**	**SE-2148K3-80-M5**
21x54	530x1372	**SE-2154K3-80-M4**	**SE-2154K3-80-M5**
21x60	530x1524	**SE-2160K3-80-M4**	**SE-2160K3-80-M5**
21x72	530x1829	**SE-2172K3-80-M4**	**SE-2172K3-80-M5**
24x24	610x610	**SE-2424K3-80-M4**	**SE-2424K3-80-M5**
24x30	610x760	**SE-2430K3-80-M4**	**SE-2430K3-80-M5**
24x36	610x914	**SE-2436K3-80-M4**	**SE-2436K3-80-M5**
24x42	610x1060	**SE-2442K3-80-M4**	**SE-2442K3-80-M5**
24x48	610x1219	**SE-2448K3-80-M4**	**SE-2448K3-80-M5**
24x54	610x1372	**SE-2454K3-80-M4**	**SE-2454K3-80-M5**
24x60	610x1524	**SE-2460K3-80-M4**	**SE-2460K3-80-M5**
24x72	610x1829	**SE-2472K3-80-M4**	**SE-2472K3-80-M5**

Actual Height: 80.375" (2042 mm).
Actual dimensions are rounded to the nearest 1/16" (2 mm)
Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.
Actual Width and Length including casters without bumpers. Casters are swiveled inwards.
Width: Add 13/16" (0.8125") [21 mm] to nominal width. **Length:** Add 9/16" (0.5625") [14 mm] to nominal length.

Mobile Shelving Units

Consist of four or five Metroseal Green wire shelves,
four posts, and four casters (two casters with brake and two without).

{10.65}

Super Erecta® Wire Shelving Mobile Units – Metroseal® Green

Mobile Super Wide Shelving Units

30" & 36" wide shelves are best for large quantities of supplies or large bulky objects.





UNIT HEIGHT	Nominal Width/Length (in.)	(mm)	4-SHELF UNITS Mobile Unit Cat. No.	5-SHELF UNITS Mobile Unit Cat. No.
68"	30x36	760x914	SE-3036K3-68-M4	
	30x42	760x1060	SE-3042K3-68-M4	
	30x48	760x1219	SE-3048K3-68-M4	
	30x54	760x1372	SE-3054K3-68-M4	
	30x60	760x1524	SE-3060K3-68-M4	
	30x72	760x1829	SE-3072K3-68-M4	
	36x36	910x914	SE-3636K3-68-M4	
	36x48	910x1219	SE-3648K3-68-M4	
	36x60	910x1524	SE-3660K3-68-M4	
	36x72	910x1829	SE-3672K3-68-M4	
80"	30x36	760x914	SE-3036K3-80-M4	SE-3036K3-80-M5
	30x42	760x1060	SE-3042K3-80-M4	SE-3042K3-80-M5
	30x48	760x1219	SE-3048K3-80-M4	SE-3048K3-80-M5
	30x54	760x1372	SE-3054K3-80-M4	SE-3054K3-80-M5
	30x60	760x1524	SE-3060K3-80-M4	SE-3060K3-80-M5
	30x72	760x1829	SE-3072K3-80-M4	SE-3072K3-80-M5
	36x36	910x914	SE-3636K3-80-M4	SE-3636K3-80-M5
	36x48	910x1219	SE-3648K3-80-M4	SE-3648K3-80-M5
	36x60	910x1524	SE-3660K3-80-M4	SE-3660K3-80-M5
	36x72	910x1829	SE-3672K3-80-M4	SE-3672K3-80-M5

Actual Height: 68.3125" (1735 mm).
Actual dimensions are rounded to the nearest 1/16" (2 mm)
Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.
Actual Width and Length including casters without bumpers. Casters are swiveled inwards.
Width: Add 13/16" (0.8125") [21 mm] to nominal width. **Length:** Add 9/16" (0.5625") [14 mm] to nominal length.

Actual Height: 80.375" (2042 mm).
Actual dimensions are rounded to the nearest 1/16" (2 mm)
Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.
Actual Width and Length including casters without bumpers. Casters are swiveled inwards.
Width: Add 13/16" (0.8125") [21 mm] to nominal width. **Length:** Add 9/16" (0.5625") [14 mm] to nominal length..

Mobile Shelving Units

Consist of four or five Metroseal Green wire shelves, four posts, and four casters (two casters with brake and two without).