

Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome

Super Adjustable Super Erecta® chrome-plated mobile shelving units are engineered to safely hold and move items in dry environments. Mobile units include shelves, four posts, two swivel and two swivel/brake polyurethane tread casters. Each shelf is finished with genuine nickel chrome plating and a protective lacquer exterior coat. The post and the exposed caster rig are finished with nickel chrome plating. The shelf has an open wire design that allows access from all sides and has mat ribs that run front to back for smooth product transfer. Each shelf has a heavy-gauge, all-welded carbon steel construction with longitudinal support trusses. On larger shelves, one or more longitudinal snake trusses provide added support. The mobile shelving units are rated to a maximum evenly distributed load of 900 lbs. (408 kg). Each unit features SiteSelect™ posts that have circular grooves on 1" (25 mm) increments. Unique corner release and SiteSelect Posts create a total system that offers "Tool-Free" fast adjustment at 1" (25 mm) intervals along the entire height of the post. Unlock the corner releases, reposition the wedges and sleeves, and relocate the shelf. These units are NSF listed.

Features and Benefits:

- **Mobile Shelving Units:** Include Chrome-plated shelves, (4) swivel casters (2 with brake and 2 without) and (4) posts under one easy-to-order model number.
- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Adjustable Super Erecta shelves and posts are constructed of heavy-gauge carbon steel.
- **Versatile:** Super Adjustable Super Erecta Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Easy Assembly Shelves:** SiteSelect Posts have a double groove visual guide feature every 8" (203 mm), circular grooves at 1" (25 mm) increments, and are numbered at 2" (51 mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Strong:** Unit load capacity: 900 lbs. (408 kg) evenly distributed.
- **Adjustability:** Unique corner release and SiteSelect Posts create a total system that offers "Tool-Free" fast adjustment at 1" (25 mm) intervals along the entire height of the post. Unlock the corner releases, reposition the wedges and sleeves, and relocate the shelf. The shelf simply seats into place.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Brake Casters:** Side pedal brakes stop the wheels from rotating. The unit can remain steady in place on even surfaces.
- **NSF Listed.**
- **Never Collapse Guarantee:** Each Metro stationary shelving unit, add-on shelving unit, mobile shelving unit and Track Shelving System are backed by a 100% money-back guarantee against unit collapse.



4-Shelf Mobile Unit



6-Shelf Mobile Unit
with solid bottom shelf



MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban® Products Company, Huntersville, NC. Microban® product protection does not by itself protect a user from food borne illness. Product must be routinely cleaned.

All Metro Catalog Sheets and our Never Collapse Guarantee Warranty are available on our website: metro.com



{10.91} Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome




Material Specifications:

- **Wire Shelves:** Heavy-gauge carbon steel, nickel-chrome plated with a protective water-based lacquer topcoat.
- **Posts:** 16-gauge carbon steel tube, 1" (25 mm) diameter, nickel-chrome plated.
 - **Post cap:** polypropylene.
 - **Post insert:** cast zinc.
 - **Corner release, wedge, and sleeve:** reinforced nylon.
 - **Leveling bolt:** zinc-plated carbon steel.
- **Plated Casters with Polyurethane Tread (5MP, 5MPB):** Chrome-plated rig and axle hardware, polyurethane tread, and polyethylene hub. Brake version has a side access brake. Bumper is a non-phthalate PVC.
- **Temperature (for the entire unit):** Continuous use (with shelves under load): -20°F (-29°C) to 120°F (49°C).


All Super Adjustable Super Erecta Mobile units are equipped with chrome-plated rig casters – two swivel and two swivel/brake. Bumpers are included.

Caster Rating: Each caster is rated for 300 lbs. (135 kg).

Unit Load Capacity: The mobile shelving unit has a load capacity of 3X the caster load rating, which equals 900 lbs. (408 kg) evenly distributed.

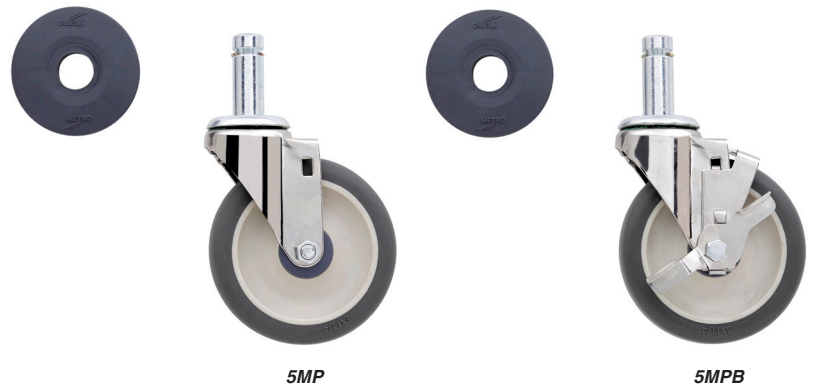

Part Number Explanation

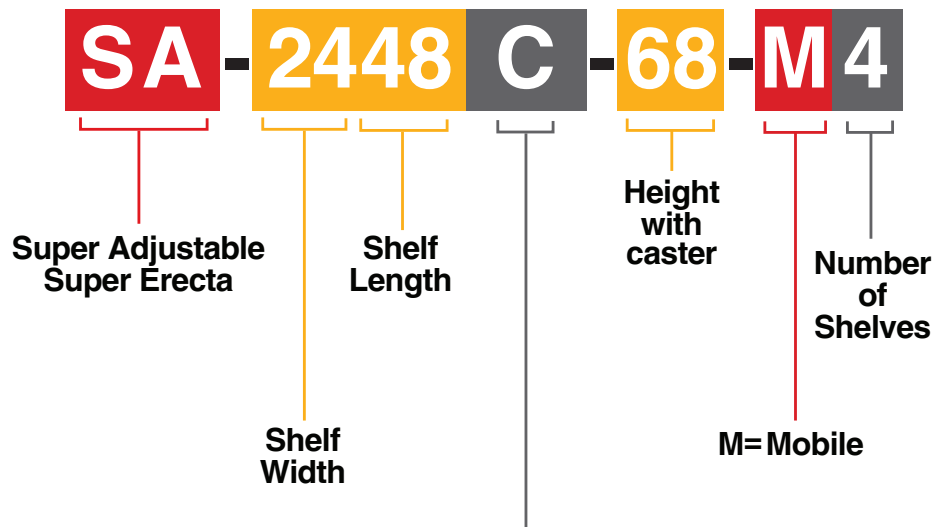

Shelf types:
C= Chrome Wire Shelves
CF= Chrome Wire Upper Shelves
& Solid Bottom Shelf

{10.91} Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome



Mobile Shelving Units

UNIT HEIGHT		4-SHELF UNITS	5-SHELF UNITS
68"			
		Mobile Unit Cat. No.	Mobile Unit Cat. No.
Nominal Width/Length (in.)	(mm)		
18x24	457x610	SA-1824C-68-M4	SA-1824C-68-M5
18x30	457x760	SA-1830C-68-M4	SA-1830C-68-M5
18x36	457x914	SA-1836C-68-M4	SA-1836C-68-M5
18x42	457x1060	SA-1842C-68-M4	SA-1842C-68-M5
18x48	457x1219	SA-1848C-68-M4	SA-1848C-68-M5
18x54	457x1372	SA-1854C-68-M4	SA-1854C-68-M5
18x60	457x1524	SA-1860C-68-M4	SA-1860C-68-M5
18x72	457x1829	SA-1872C-68-M4	SA-1872C-68-M5
21x24	530x610	SA-2124C-68-M4	SA-2124C-68-M5
21x30	530x760	SA-2130C-68-M4	SA-2130C-68-M5
21x36	530x914	SA-2136C-68-M4	SA-2136C-68-M5
21x42	530x1060	SA-2142C-68-M4	SA-2142C-68-M5
21x48	530x1219	SA-2148C-68-M4	SA-2148C-68-M5
21x54	530x1372	SA-2154C-68-M4	SA-2154C-68-M5
21x60	530x1524	SA-2160C-68-M4	SA-2160C-68-M5
21x72	530x1829	SA-2172C-68-M4	SA-2172C-68-M5
24x24	610x610	SA-2424C-68-M4	SA-2424C-68-M5
24x30	610x760	SA-2430C-68-M4	SA-2430C-68-M5
24x36	610x914	SA-2436C-68-M4	SA-2436C-68-M5
24x42	610x1060	SA-2442C-68-M4	SA-2442C-68-M5
24x48	610x1219	SA-2448C-68-M4	SA-2448C-68-M5
24x54	610x1372	SA-2454C-68-M4	SA-2454C-68-M5
24x60	610x1524	SA-2460C-68-M4	SA-2460C-68-M5
24x72	610x1829	SA-2472C-68-M4	SA-2472C-68-M5

Actual Height: 68.3125" (1735 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. Length: Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Mobile Shelving Units

Consist of four or five chrome-plated wire shelves,
four posts, and four casters (two casters with brake and two without).

{10.91} Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome



Mobile Shelving Units

UNIT HEIGHT		4-SHELF UNITS	5-SHELF UNITS
80"			
		Mobile Unit Cat. No.	Mobile Unit Cat. No.
Nominal Width/Length (in.)	(mm)		
18x24	457x610	SA-1824C-80-M4	SA-1824C-80-M5
18x30	457x760	SA-1830C-80-M4	SA-1830C-80-M5
18x36	457x914	SA-1836C-80-M4	SA-1836C-80-M5
18x42	457x1060	SA-1842C-80-M4	SA-1842C-80-M5
18x48	457x1219	SA-1848C-80-M4	SA-1848C-80-M5
18x54	457x1372	SA-1854C-80-M4	SA-1854C-80-M5
18x60	457x1524	SA-1860C-80-M4	SA-1860C-80-M5
18x72	457x1829	SA-1872C-80-M4	SA-1872C-80-M5
21x24	530x610	SA-2124C-80-M4	SA-2124C-80-M5
21x30	530x760	SA-2130C-80-M4	SA-2130C-80-M5
21x36	530x914	SA-2136C-80-M4	SA-2136C-80-M5
21x42	530x1060	SA-2142C-80-M4	SA-2142C-80-M5
21x48	530x1219	SA-2148C-80-M4	SA-2148C-80-M5
21x54	530x1372	SA-2154C-80-M4	SA-2154C-80-M5
21x60	530x1524	SA-2160C-80-M4	SA-2160C-80-M5
21x72	530x1829	SA-2172C-80-M4	SA-2172C-80-M5
24x24	610x610	SA-2424C-80-M4	SA-2424C-80-M5
24x30	610x760	SA-2430C-80-M4	SA-2430C-80-M5
24x36	610x914	SA-2436C-80-M4	SA-2436C-80-M5
24x42	610x1060	SA-2442C-80-M4	SA-2442C-80-M5
24x48	610x1219	SA-2448C-80-M4	SA-2448C-80-M5
24x54	610x1372	SA-2454C-80-M4	SA-2454C-80-M5
24x60	610x1524	SA-2460C-80-M4	SA-2460C-80-M5
24x72	610x1829	SA-2472C-80-M4	SA-2472C-80-M5

Actual Height: 80.375" (2042 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. Length: Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Mobile Shelving Units

Consist of four or five chrome-plated wire shelves,
four posts, and four casters (two casters with brake and two without).

{10.91} Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome



Super Wide Mobile Shelving Units

30" & 36" wide shelves are best for large quantities of supplies or large bulky objects.

			4-SHELF UNITS	5-SHELF UNITS
				
			Mobile Unit Cat. No.	Mobile Unit Cat. No.
68"	30x36	760x914	SA-3036C-68-M4	
	30x42	760x1060	SA-3042C-68-M4	
	30x48	760x1219	SA-3048C-68-M4	
	30x54	760x1372	SA-3054C-68-M4	
	30x60	760x1524	SA-3060C-68-M4	
	30x72	760x1829	SA-3072C-68-M4	
	36x36	910x914	SA-3636C-68-M4	
	36x48	910x1219	SA-3648C-68-M4	
	36x60	910x1524	SA-3660C-68-M4	
	36x72	910x1829	SA-3672C-68-M4	
80"	30x36	760x914	SA-3036C-80-M4	SA-3036C-80-S5
	30x42	760x1060	SA-3042C-80-M4	SA-3042C-80-S5
	30x48	760x1219	SA-3048C-80-M4	SA-3048C-80-S5
	30x54	760x1372	SA-3054C-80-M4	SA-3054C-80-S5
	30x60	760x1524	SA-3060C-80-M4	SA-3060C-80-S5
	30x72	760x1829	SA-3072C-80-M4	SA-3072C-80-S5
	36x36	910x914	SA-3636C-80-M4	SA-3636C-80-S5
	36x48	910x1210	SA-3648C-80-M4	SA-3648C-80-S5
	36x60	910x1524	SA-3660C-80-M4	SA-3660C-80-S5
	36x72	910x1829	SA-3672C-80-M4	SA-3672C-80-S5

Actual Height: 68.3125" (1735 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Actual Height: 80.375" (2042 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. **Length:** Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Mobile Shelving Units

Consist of four or five chrome-plated wire shelves, four posts, and four casters (two casters with brake and two without).

{10.91} Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome



Mobile SOLID BOTTOM Shelving Units

UNIT HEIGHT		6-SHELF UNITS	7-SHELF UNITS
68"			
		Mobile Unit Cat. No.	Mobile Unit Cat. No.
Nominal Width/Length (in.)	(mm)		
18x24	457x610	SA-1824CF-68-M4	SA-1824CF-68-M5
18x30	457x760	SA-1830CF-68-M4	SA-1830CF-68-M5
18x36	457x914	SA-1836CF-68-M4	SA-1836CF-68-M5
18x42	457x1060	SA-1842CF-68-M4	SA-1842CF-68-M5
18x48	457x1219	SA-1848CF-68-M4	SA-1848CF-68-M5
18x54	457x1372	SA-1854CF-68-M4	SA-1854CF-68-M5
18x60	457x1524	SA-1860CF-68-M4	SA-1860CF-68-M5
18x72	457x1829	SA-1872CF-68-M4	SA-1872CF-68-M5
21x24	530x610	SA-2124CF-68-M4	SA-2124CF-68-M5
21x30	530x760	SA-2130CF-68-M4	SA-2130CF-68-M5
21x36	530x914	SA-2136CF-68-M4	SA-2136CF-68-M5
21x42	530x1060	SA-2142CF-68-M4	SA-2142CF-68-M5
21x48	530x1219	SA-2148CF-68-M4	SA-2148CF-68-M5
21x54	530x1372	SA-2154CF-68-M4	SA-2154CF-68-M5
21x60	530x1524	SA-2160CF-68-M4	SA-2160CF-68-M5
21x72	530x1829	SA-2172CF-68-M4	SA-2172CF-68-M5
24x24	610x610	SA-2424CF-68-M4	SA-2424CF-68-M5
24x30	610x760	SA-2430CF-68-M4	SA-2430CF-68-M5
24x36	610x914	SA-2436CF-68-M4	SA-2436CF-68-M5
24x42	610x1060	SA-2442CF-68-M4	SA-2442CF-68-M5
24x48	610x1219	SA-2448CF-68-M4	SA-2448CF-68-M5
24x54	610x1372	SA-2454CF-68-M4	SA-2454CF-68-M5
24x60	610x1524	SA-2460CF-68-M4	SA-2460CF-68-M5
24x72	610x1829	SA-2472CF-68-M4	SA-2472CF-68-M5

Actual Height: 68.3125" (1735 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. Length: Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Mobile SOLID BOTTOM Shelving Units

Consist of four or five chrome-plated wire shelves, four posts, and four casters (two casters with brake and two without).



Solid Galvanized Shelf

{10.91}



Super Adjustable Super Erecta® Wire Shelving Mobile Units – Chrome

Mobile SOLID BOTTOM Shelving Units

UNIT HEIGHT		6-SHELF UNITS	7-SHELF UNITS
80"			
		Mobile Unit Cat. No.	Mobile Unit Cat. No.
Nominal Width/Length (in.)	(mm)		
18x24	457x610	SA-1824CF-68-M4	SA-1824CF-68-M5
18x30	457x760	SA-1830CF-68-M4	SA-1830CF-68-M5
18x36	457x914	SA-1836CF-68-M4	SA-1836CF-68-M5
18x42	457x1060	SA-1842CF-68-M4	SA-1842CF-68-M5
18x48	457x1219	SA-1848CF-68-M4	SA-1848CF-68-M5
18x54	457x1372	SA-1854CF-68-M4	SA-1854CF-68-M5
18x60	457x1524	SA-1860CF-68-M4	SA-1860CF-68-M5
18x72	457x1829	SA-1872CF-68-M4	SA-1872CF-68-M5
21x24	530x610	SA-2124CF-68-M4	SA-2124CF-68-M5
21x30	530x760	SA-2130CF-68-M4	SA-2130CF-68-M5
21x36	530x914	SA-2136CF-68-M4	SA-2136CF-68-M5
21x42	530x1060	SA-2142CF-68-M4	SA-2142CF-68-M5
21x48	530x1219	SA-2148CF-68-M4	SA-2148CF-68-M5
21x54	530x1372	SA-2154CF-68-M4	SA-2154CF-68-M5
21x60	530x1524	SA-2160CF-68-M4	SA-2160CF-68-M5
21x72	530x1829	SA-2172CF-68-M4	SA-2172CF-68-M5
24x24	610x610	SA-2424CF-68-M4	SA-2424CF-68-M5
24x30	610x760	SA-2430CF-68-M4	SA-2430CF-68-M5
24x36	610x914	SA-2436CF-68-M4	SA-2436CF-68-M5
24x42	610x1060	SA-2442CF-68-M4	SA-2442CF-68-M5
24x48	610x1219	SA-2448CF-68-M4	SA-2448CF-68-M5
24x54	610x1372	SA-2454CF-68-M4	SA-2454CF-68-M5
24x60	610x1524	SA-2460CF-68-M4	SA-2460CF-68-M5
24x72	610x1829	SA-2472CF-68-M4	SA-2472CF-68-M5

Actual Height: 80.375" (2042 mm)

Actual Width and Length including bumpers: Width: Add 2-3/16" (2.1875") [56 mm] to nominal width. Length: Add 1-15/16" (1.9375") [49 mm] to nominal length.

Actual Width and Length including casters without bumpers. Casters are swiveled inwards.

Width: Add 1" (1") [25 mm] to nominal width. **Length:** Add 3/4" (0.75") [19 mm] to nominal length.

Mobile SOLID BOTTOM Shelving Units

Consist of four or five chrome-plated wire shelves, four posts, and four casters (two casters with brake and two without).



Solid Galvanized Shelf