



**VU155N0RP**

| Model configurations |             |                  |
|----------------------|-------------|------------------|
| Ice tower location   | Valve type  | Item number      |
| left                 | lever       | <b>VU155N0LL</b> |
|                      | push-button | <b>VU155N0LP</b> |
| right                | lever       | <b>VU155N0RL</b> |
|                      | push-button | <b>VU155N0RP</b> |

### Features

#### 150 lb (68 kg) undercounter ice storage

#### Upscale drink station

- low profile with ice storage under the counter
- auto-fill with an ice machine out of view using RIDE® remote ice delivery equipment
- ideal for island configurations
- fits into ADA compliant 34.00" (86.4 cm) counters

#### Left or right side ice dispense chute

#### Durable, full stainless exterior

#### Pre-configured for Follett® RIDE model Chewblet® ice machines

- connect up to two Follett ice machines
- consumer-preferred, chewable compressed nugget ice
- slow melting, maintains drink temperature

#### Faster, safer manual loading of ice at waist height

- safe, easy waist-height loading front or rear
- eliminates overhead lifting of buckets or loading from ladders
- allows quick reloading during serving period with minimal disruption
- may be manually loaded with cube ice up to 1.00" (2.54 cm) square or Chewblet ice

#### Certifications (applied to all products unless otherwise noted)



### Options and accessories<sup>1</sup>

Kit to integrate with Ice Manager™ diverter valve  
(item# 00185165)


<sup>1</sup> Certifications do not apply to options and accessories.

## Specification


|                                                     |                                                                                                                                               |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Ice storage capacity                                | 150 lb (68 kg)                                                                                                                                |
| <b>W1</b> Width                                     | 31.25" (79.4 cm)                                                                                                                              |
| <b>W2</b> Width, tower                              | 11.75" (29.8 cm)                                                                                                                              |
| <b>D1</b> Depth                                     | 27.38" (69.5 cm)                                                                                                                              |
| <b>D2</b> Depth, drain pan interior                 | 7.38" (18.74 cm)                                                                                                                              |
| <b>D3</b> Depth, tower                              | 16.50" (41.9 cm)                                                                                                                              |
| <b>H1</b> Height, upper section                     | 22.00" (55.9 cm)                                                                                                                              |
| <b>H2</b> Height, lower section                     | 27.88" (70.8 cm)                                                                                                                              |
| <b>H3</b> Height, leg                               | adjustable 6.00" - 9.00"<br>(15.24 - 22.86 cm)                                                                                                |
| <b>H4</b> Ice dispense height clearance             | 10.00" (25.4 cm)                                                                                                                              |
| <b>K1</b> Ice dispense chute                        | utility connections are on opposite side of ice dispense chute                                                                                |
| <b>L1</b> Countertop to lever                       | 8.25" (20.96 cm)                                                                                                                              |
| <b>L2</b> Front of dispenser to lever               | 7.50" (19.05 cm)                                                                                                                              |
| Installation clearance                              | 51.00" (129.5 cm) above counter for drop-in installation, 1.25" (3.18 cm) maximum counter thickness                                           |
| Service clearance                                   | 12.00" (30.5 cm) minimum on side opposite of ice chute, 36.00" (91.4 cm) minimum above counter for auger removal                              |
| <b>C1</b> Electrical                                | 2.4 amps, 8' (2.4 m) cord and NEMA 5-15 90° plug provided with each dispenser. Separate circuits and disconnects required for each dispenser. |
| <b>C2</b> Drain - ice storage                       | 3/4" PVC slip joint                                                                                                                           |
| <b>C3</b> Water inlet                               | 3/8" tubing                                                                                                                                   |
| <b>C4</b> Drain - drain pan                         | 3/4" PVC hose                                                                                                                                 |
| <b>C5</b> Ice machine electrical connection         | Pre-wired bin signal junction box with twist lock connector(s). Standard length is 20' (6.1 m).                                               |
| <b>C6</b> Ice machine ice transport tube connection | two ice transport tube entry holes on each side                                                                                               |
| <b>C7</b> Air Break                                 | do not connect to drain system                                                                                                                |
| Approximate net weight                              | 200 lb (91 kg)                                                                                                                                |
| Approximate shipping weight                         | 231 lb (105 kg)                                                                                                                               |
| NOTE: For indoor use only                           |                                                                                                                                               |

SHORT FORM SPECIFICATION: Ice and water dispenser to be Follett model \_\_\_\_\_. Dispenser to store up to 150 lb (68 kg) of ice and allow loading of ice at waist level from front or rear. Ice and water tower and top to be of stainless steel with plastic trim. Full-length drain pan to be one-piece molded polyethylene. To include 6.00" - 9.00" (15.24 - 22.86 cm) adjustable legs for dispenser support. Storage area to be insulated with CARB compliant non-HFC foam. Dispenser to be pre-configured to accept up to two RIDE model ice machines, sold separately. 8' (2.4 m) cord and NEMA 5-15 90° hospital grade plug provided. Dispenser NSF, UL, and cUL listed.

## Dimensional drawing

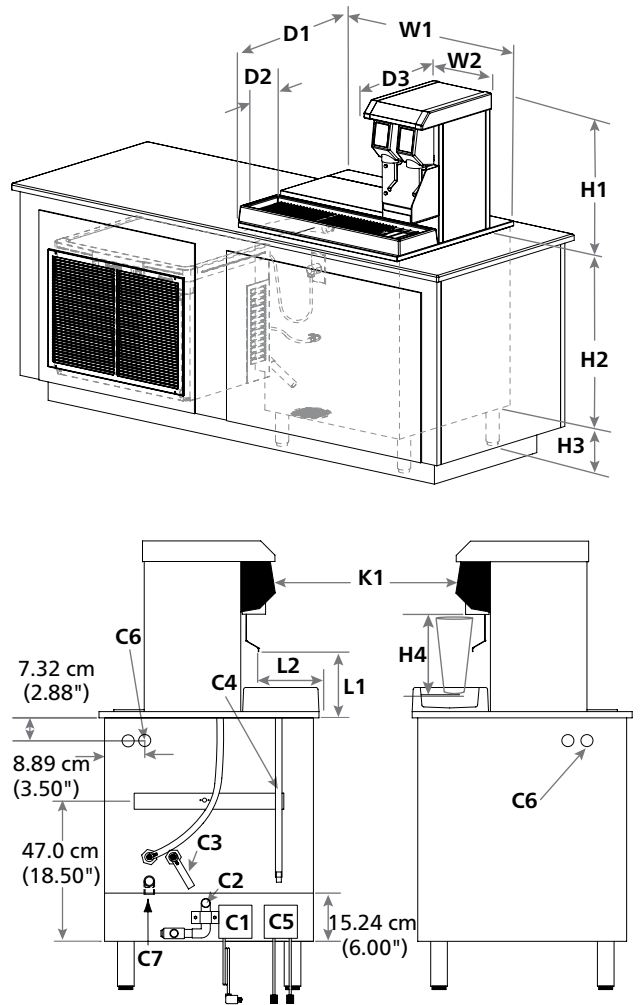

## Counter cutout detail

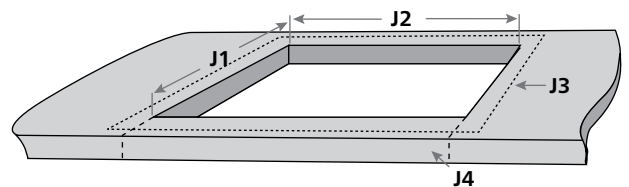

|                                                                             |                                            |
|-----------------------------------------------------------------------------|--------------------------------------------|
| <b>J1</b> Cutout depth                                                      | 26.25" (66.68 cm) ± .0125" (.0317 cm)      |
| <b>J2</b> Cutout width                                                      | 30.375" (77.152 cm) ± .0125" (.0317 cm)    |
| <b>J3</b> Flat surface required                                             | 31.25" (79.375 cm) W x 28.00" (71.12 cm) D |
| <b>J4</b> Optional – counter front may be removed for slide-in installation |                                            |

ICE MANAGER and VISION are trademarks of Follett Products, LLC. CHEWBLET, FOLLETT and RIDE are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.