



Provino II W 1390-2T with horizontal and slanted plexiglass wine racks and dual temperature control

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

PROVINO II WINE

MODELS:

PROVINO II W700, W800, W1390, W1390-2T, W2075

STANDARD FEATURES

- Glass sides and back
- Dual Medium Temperature Version with intermediate double glass divider
- Triple pane glass premium door
- Steel load bearing structure
- 3000°K LED lighting with dimmer switch
- Touch Control
- Ventilated cooling
- interior vertical shelf support in stainless steel
- adjustable feet
- standard steel 304A
- stainless steel interior and exterior
- Glass shelves adjustable in height on racks (7 shelves included per door)
- programmed automatic electric defrost
- Approvals: cETLus, ETL sanitation, certified CE
- Self-contained
- Condensate evaporator pan

OPTIONS

- RAL Color Option powder coated door handles exterior and interior over stainless
- Front wood laminate door and handles
- interior shelf trim
- Front wood laminate storage doors finish on base
- top door and interior shelf trim
- Top door
- door locks
- Remote application
- Top mounted condensing unit
- water cooled
- central refrigeration rack
- 60 Hz components UL
- 6mm thick stone back panel behind shelf
- Narrow Depth
- front breathing available for 1400 - 2800 models


*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




MODELS: PROVINO II W700, W800, W1390, W1390-2T, W2075

PROVINO II PLAN VIEWS

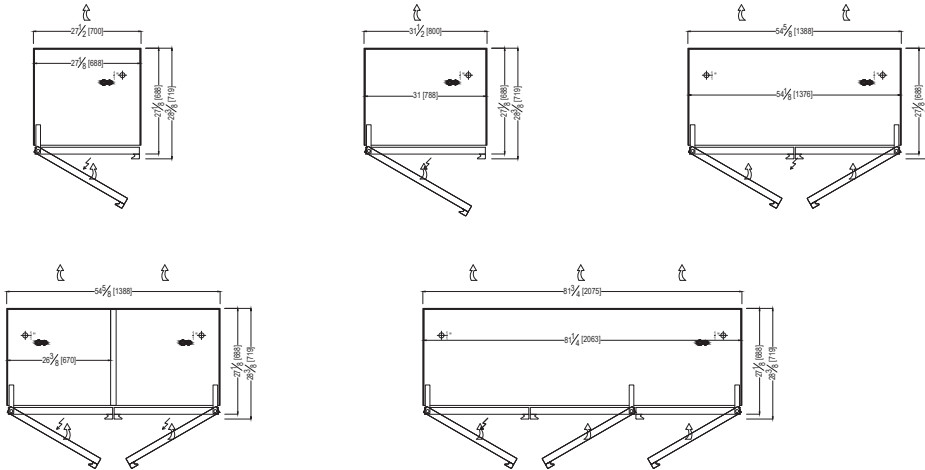

ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

PROVINO II REAR ELEVATIONS (OPERATOR SIDE)

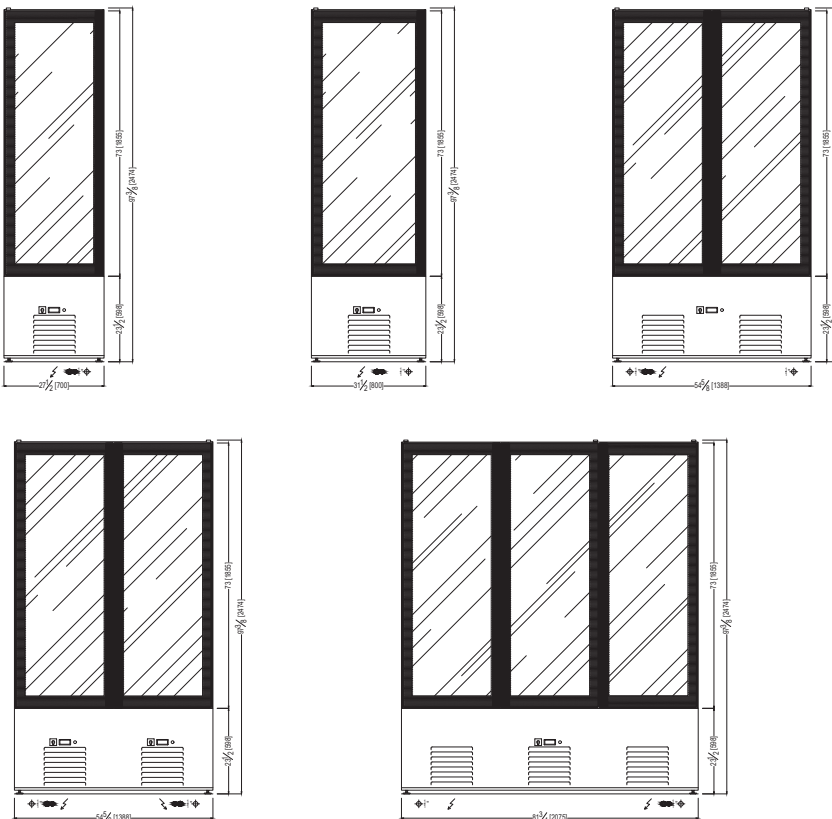

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




MODELS: PROVINO II W700, W800, W1390, W1390-2T, W2075


**PROVINO II
SECTION VIEWS**

**PROVINO II - WITH FRONT AND REAR DOORS
SECTION VIEWS**


**STANDARD:
SELF-CONTAINED**

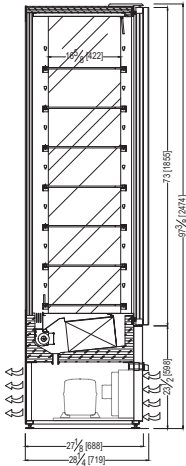


**STANDARD:
REMOTE WITH
VERTICAL SHELVES**

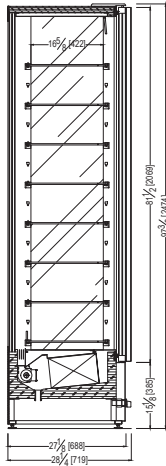


**OPTIONAL:
TOP MOUNTED
CONDENSING UNIT**

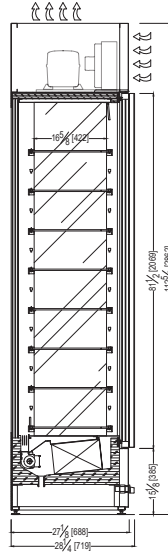


**OPTIONAL:
TOP MOUNTED
CONDENSING UNIT**

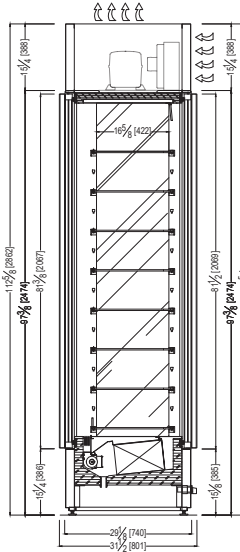

**STANDARD:
REMOTE**

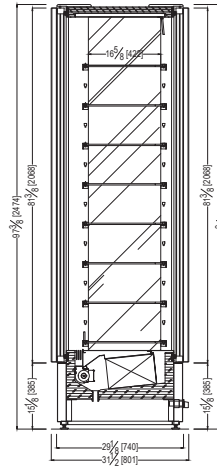


**STANDARD:
SELF-CONTAINED**

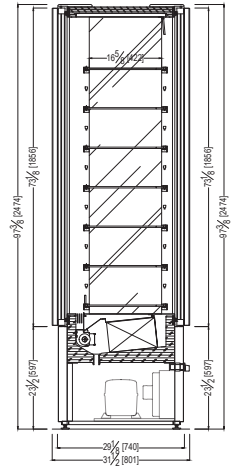


**PROVINO II- OPTIONAL WINE RACKS
SECTION VIEWS**


**OPTIONAL:
S/S ROUND
TUBULAR PYRAMID**

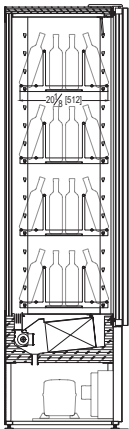


**OPTIONAL:
S/S ROUND
TUBULAR RACK**

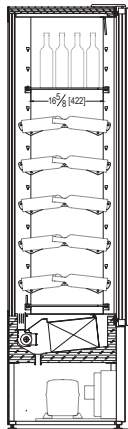

**OPTIONAL:
SLANTED
PLEXIGLASS RACK**



**OPTIONAL:
HORIZONTAL
PLEXIGLASS RACK**



*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

MODELS: PROVINO II W700, W800, W1390, W1390-2T, W2075

Project Name: _____

Item #: _____ Quantity: _____

PROVINO II WINE - SELF CONTAINED						
TECHNICAL FEATURES		MODELS				
Model Name (Model ETL Code)		PROVINO II W700 (PROVINO1P)	PROVINO II W800 (PROVINO1P)	PROVINO II W1390 (PROVINO2P)	PROVINO II W1390-2T (PROVINO1P)X2	PROVINO II W2075 (PROVINO3P)
External Dimensions (L-D-H)	Inches	*27 1/2" - 28 1/4" - 97 3/8"	*31 1/2" - 28 1/4" - 97 3/8"	*54 5/8" - 28 1/4" - 97 3/8"	*82 5/8" - 28 1/4" - 97 3/8"	*81 3/4" - 28 1/4" - 97 3/8"
Inches-MM	MM	*700 - 719 - 2474	*800 - 719 - 2474	*1388 - 719 - 2474	*1388 - 719 - 2474	*2075 - 719 - 2474
Crated Dimensions (L-D-H)	Inches	35" - 35" - 108"	38 3/5" - 35" - 108"	61 4/5" - 35" - 108"	62 4/5" - 35" - 108"	88 4/5" - 35" - 108"
Inches-MM	MM	880 - 870 - 2744	980 - 870 - 2745	1570 - 870 - 2746	1570 - 870 - 2746	2255 - 870 - 2748
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Number of Glass Doors	#	1	2	2	3	4
Wine Rack/ Shelf number	bottle orientation: #	Vertical Shelves: 7 Tubular Pyramid: 4 Tubular Rack: 6 Slanted Plexiglass Rack: 2 Horizontal Plexiglass Rack: 2	Vertical Shelves: 7 Tubular Pyramid: 4 Tubular Rack: 6 Slanted Plexiglass Rack: 2 Horizontal Plexiglass Rack: 3	Vertical Shelves: 14 Tubular Pyramid: 8 Tubular Rack: 12 Slanted Plexiglass Rack: 4 Horizontal Plexiglass Rack: 8	Vertical Shelves: 14 Tubular Pyramid: 8 Tubular Rack: 12 Slanted Plexiglass Rack: 4 Horizontal Plexiglass Rack: 9	Vertical Shelves: 21 Tubular Pyramid: 12 Tubular Rack: 18 Slanted Plexiglass Rack: 6 Horizontal Plexiglass Rack: 18
Bottle Capacity (STD size bottles)	bottle orientation: #	Vertical Shelves: 168 Tubular Pyramid: 32 Tubular Rack: 24 Slanted Plexiglass Rack: 60 Horizontal Plexiglass Rack: 96	Vertical Shelves: 224 Tubular Pyramid: 36 Tubular Rack: 36 Slanted Plexiglass Rack: 80 Horizontal Plexiglass Rack: 120	Vertical Shelves: 336 Tubular Pyramid: 64 Tubular Rack: 48 Slanted Plexiglass Rack: 120 Horizontal Plexiglass Rack: 192	Vertical Shelves: 168(2) Tubular Pyramid: 32(2) Tubular Rack: 24(2) Slanted Plexiglass Rack: 60(2) Horizontal Plexiglass Rack: 96(2)	Vertical Shelves: 504 Tubular Pyramid: 96 Tubular Rack: 72 Slanted Plexiglass Rack: 180 Horizontal Plexiglass Rack: 288
Operating Temperature	*F	45°F to 58°F	45°F to 58°F	45°F to 58°F	45°F to 58°F	45°F to 58°F
Condensing Units	#	1	2	2	3	4
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	2 / Hermetic
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	(2) 220/1/60	220/1/60
Power Consumption	(W/A)	700/3.8	700/3.8	1360/7.6	(2) 680/3.6	1970/11.1
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290	R290	R291
Net Weights	Lb	551	617	816	838	1080
Crated Weights	Lb	600	680	880	920	1160

*DIMENSIONS WITH POLISHED S/S SIDES

PROVINO II WINE - REMOTE						
TECHNICAL FEATURES		MODELS				
Model Name (Model ETL Code)		PROVINO II W700 (PROVINO1P)	PROVINO II W800 (PROVINO1P)	PROVINO II W1390 (PROVINO2P)	PROVINO II W1390-2T (PROVINO1P)X2	PROVINO II W2075 (PROVINO3P)
External Dimensions (L-D-H)	Inches	*27 1/2" - 28 1/4" - 97 3/8"	*31 1/2" - 28 1/4" - 97 3/8"	*54 5/8" - 28 1/4" - 97 3/8"	*82 5/8" - 28 1/4" - 97 3/8"	*81 3/4" - 28 1/4" - 97 3/8"
Inches-MM	MM	*700 - 719 - 2474	*800 - 719 - 2474	*1388 - 719 - 2474	*1388 - 719 - 2474	*2075 - 719 - 2474
Crated Dimensions (L-D-H)	Inches	35" - 35" - 108"	38 3/5" - 35" - 108"	61 4/5" - 35" - 108"	62 4/5" - 35" - 108"	88 4/5" - 35" - 108"
Inches-MM	MM	880 - 870 - 2744	980 - 870 - 2745	1570 - 870 - 2746	1570 - 870 - 2746	2255 - 870 - 2748
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Number of Glass Doors	#	1	2	2	3	4
Wine Rack Shelves	bottle orientation: #	Vertical Shelves: 8 Tubular Pyramid: 4 Tubular Rack: 7 Slanted Plexiglass Rack: 2 Horizontal Plexiglass Rack: 2	Vertical Shelves: 8 Tubular Pyramid: 4 Tubular Rack: 7 Slanted Plexiglass Rack: 2 Horizontal Plexiglass Rack: 3	Vertical Shelves: 16 Tubular Pyramid: 8 Tubular Rack: 14 Slanted Plexiglass Rack: 4 Horizontal Plexiglass Rack: 8	Vertical Shelves: 16 Tubular Pyramid: 8 Tubular Rack: 14 Slanted Plexiglass Rack: 4 Horizontal Plexiglass Rack: 9	Vertical Shelves: 24 Tubular Pyramid: 12 Tubular Rack: 21 Slanted Plexiglass Rack: 6 Horizontal Plexiglass Rack: 18
Bottle Capacity (STD size)	bottle orientation: #	Vertical Shelves: 192 Tubular Pyramid: 32 Tubular Rack: 28 Slanted Plexiglass Rack: 72 Horizontal Plexiglass Rack: 112	Vertical Shelves: 256 Tubular Pyramid: 36 Tubular Rack: 42 Slanted Plexiglass Rack: 96 Horizontal Plexiglass Rack: 140	Vertical Shelves: 384 Tubular Pyramid: 64 Tubular Rack: 56 Slanted Plexiglass Rack: 144 Horizontal Plexiglass Rack: 224	Vertical Shelves: 192(2) Tubular Pyramid: 32(2) Tubular Rack: 28(2) Slanted Plexiglass Rack: 72(2) Horizontal Plexiglass Rack: 112(2)	Vertical Shelves: 576 Tubular Pyramid: 96 Tubular Rack: 84 Slanted Plexiglass Rack: 216 Horizontal Plexiglass Rack: 336
Operating Temperature	*F	45°F to 58°F	45°F to 58°F	45°F to 58°F	45°F to 58°F	45°F to 58°F
Condensing Units	#	1	2	2	3	4
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	2 / Hermetic
BTU'S @ +14°F Evap Temperature	BTU/H	2900	3240	4950	(2) 2400	7200
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	(2) 220/1/60	220/1/60
Power Consumption	(W/A)	700/3.8	700/3.8	1360/7.6	(2) 680/3.6	1970/11.1
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R452a	R452a	R452a	R452a	R452a
Pipe Size (Suction-Liquid)	(INCHES)	15/32"- 15/64"	15/32"- 15/64"	35/64"- 5/16"	(2) 15/32"- 15/64"	5/8"- 5/16"
Net Weights	Lb	551	617	816	838	1080
Crated Weights	Lb	600	680	880	920	1160

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

