



Item: \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_

## Delux Series

Models: ☐ SPR-180 ☐ SPR-360 ☐ SPR-540 ☐ SSPR-110 ☐ SSPR-220



SPR-180

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): \_\_\_\_\_

### Standard Features

- Fully welded chassis
- Compact, heavy gauge chassis for long life
- Stainless steel sides and front valve cover
- Stainless steel tubing for pilots
- Stainless steel drip pan
- Cast iron top grate

### Options and Accessories

- ☐ 5" swivel casters (set of four - 2 locking)
- ☐ 5" swivel casters (set of six - 3 locking) for double and triple stock pots

### Stock Pot Range: SPR

- Heavy, cast iron three-ring outer burner, rated at a total of 50,000 BTU/hr, outer ring at 35,000, inner ring 15,000 BTU/hr for slow simmering of product
- Two Manual controls to operate the inner and outer rings independently for maximum flexibility of usage
- Available in 1,2 and 3 side by side units


### Stock Pot Range: SSPR

- Heavy, cast iron three-ring outer burner, rated at a total of 100,000 BTU/hr, outer ring at 50,000, inner ring 50,000 BTU/hr for quick boiling of product
- Two Manual controls to operate the inner and outer rings independently for maximum flexibility of usage
- Available in 1 or 2 side by side units



**LIMITED WARRANTY, TWO YEAR PARTS AND ONE YEAR LABOR**

# Stock Pot Range

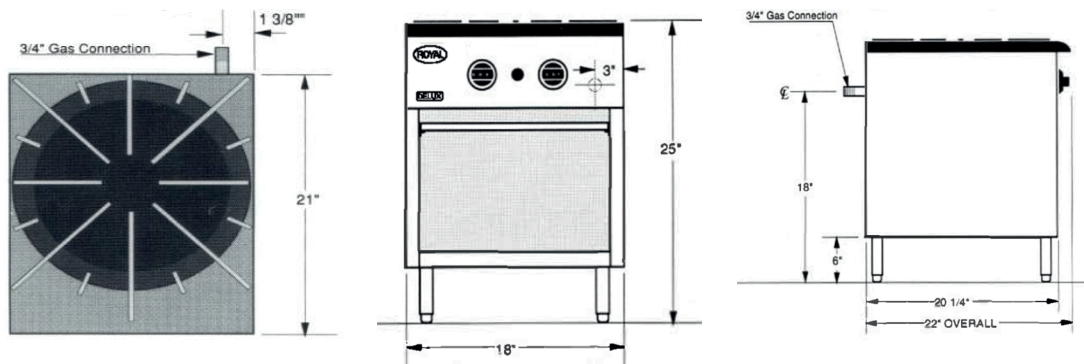

| Model Number | Width | Depth | Height | Burners | Total BTU | Ship Weight |
|--------------|-------|-------|--------|---------|-----------|-------------|
| SPR-180      | 18"   | 21"   | 25"    | 1       | 50,000    | 110 lbs.    |
| SPR-360      | 36"   | 21"   | 25"    | 1       | 100,000   | 255 lbs.    |
| SPR-540      | 54"   | 21"   | 25"    | 1       | 150,000   | 320 lbs.    |
| SSPR-110     | 18"   | 21"   | 25"    | 1       | 100,000   | 125 lbs.    |
| SSPR-220     | 36"   | 21"   | 25"    | 1       | 200,000   | 255 lbs.    |

## Notes:

### Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

## Gas Pressure:

|          |             |
|----------|-------------|
| 5" W.C.  | Natural Gas |
| 10" W.C. | Propane     |

## Clearances:

|       | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear  | 17"         | 4"              |
| Sides | 15"         | 0"              |

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

**Royal Range of California, Inc.**  
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
 Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)