


MODEL # SCRFC H42

SPECIFICATIONS

The Bravo Air Screen Series display SCRFC H42 case is a self-service refrigerated case and is available with a choice of standard grade plastic laminate exterior. The case is designed to work as a stand-alone case or along-side of a Monarch H42 case to create a unique side by side design of service and self-service display in a continuous counter or as individual cases. Units are available in both self-contained and remote refrigeration.

Self-contained unit is a rear breathing case and must be used in a front-line operation.

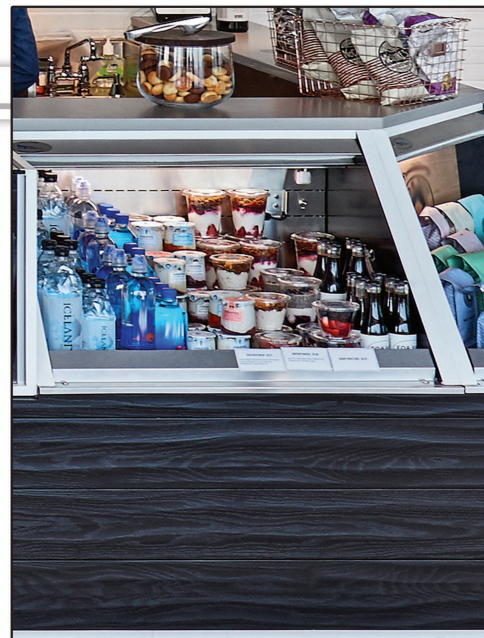

Available lengths: ☐ 36" ☐ 48" ☐ 60" ☐ 72"

Available depths: ☐ 32 5/8"

Available heights: ☐ 42"

STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Standard Grade Laminate Exterior
- Brushed Aluminum Interior Ends
- Stainless Steel Perforated Interior Back Panel
- LED Top Canopy Light
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- Unique Internal Baffle Design for Compressor Noise Reduction
- Rear Breathing
- 8' Cord and Plug
- Conforms to NSF STD 7 Refrigeration
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Green Screen
- ☐ Remote Refrigeration
- ☐ Stainless Steel Exterior Finish with Standard T-Molding
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Black Styrene Step Sham
- ☐ Stainless Steel Step Sham
- ☐ Glass Shelf
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Powder Coated Interior Back Panel and Hardware
 - ☐ Black ☐ White ☐ Custom Color
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Finished Back with Black Air Grill
- ☐ Stainless Steel Louvered Air Grill
- ☐ Removable Locking Security Panels
- ☐ Pull Down #23 Econo Frost Night Curtain
- ☐ Thermometer

CALL TOLL FREE: 800-525-3692 (609-714-2330)



FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v11_14_17

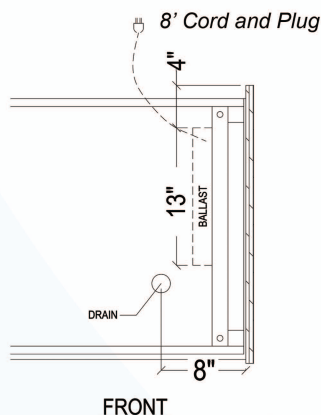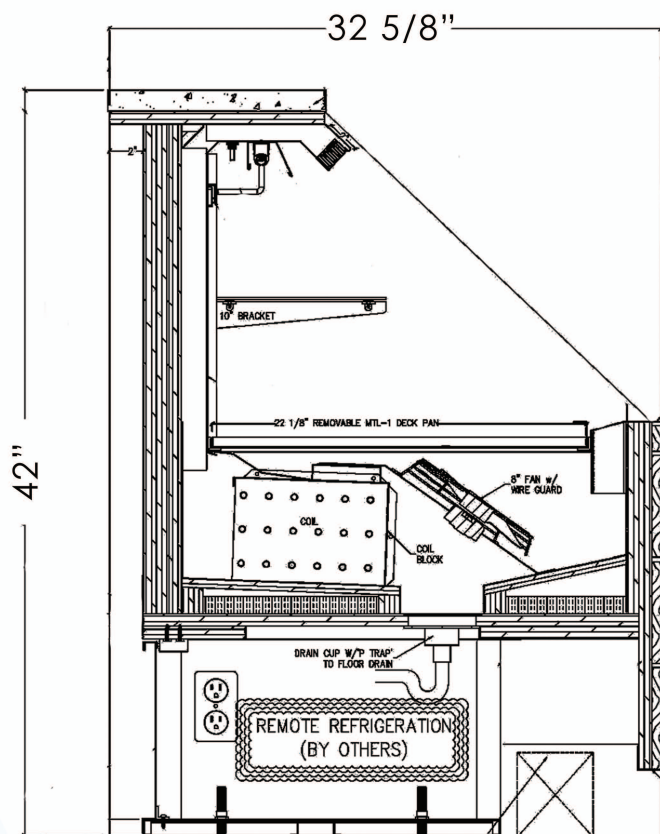

MODEL # SCRFC H42

FRONT

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC3648R-H42	36	32 5/8	42	1/2	115	12.4	5-20P	360	134A
SCRFC4848R-H42	48	32 5/8	42	1/2	115	12.5	5-20P	450	134A
SCRFC6048R-H42	60	32 5/8	42	3/4	115/208-230 4 wire	10.9	L14-30P	540	404A
SCRFC7248R-H42	72	32 5/8	42	3/4	115/208-230 4 wire	11.0	L14-30P	630	404A

REMOTE - REFRIGERATED

MODEL	BTU @ 20° F	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC3648R-RR-H42	4140	115	1.0	5-15P	310	Verify
SCRFC4848R-RR-H42	4140	115	1.0	5-15P	400	Verify
SCRFC6048R-RR-H42	7470	115	1.5	5-15P	440	Verify
SCRFC7248R-RR-H42	7470	115	1.5	5-15P	530	Verify



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No. 120

**Electrical & Plumbing locations**

1. All Self-Contained, Remote and Glycol Units must be run to a floor drain at time of installation.
2. Refrigeration System is designed so air will flow front to rear. Unobstructed air flow must be maintained to ensure unit performance and maintain warranty.
3. The SCRFC H42 merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC. v11_14_17