


CORNER SINKS

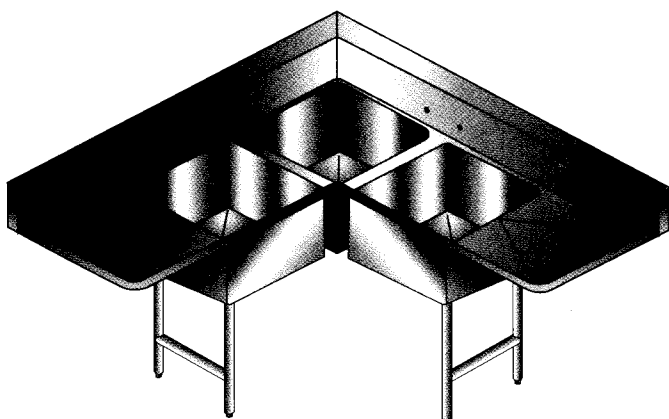

Spec Line Shown

FEATURES

Corner sinks offer premium space utilization.
Fully fabricated sink bowls for full metal thickness throughout the bowls.
Large $\frac{3}{4}$ " radius on all corners both vertical and horizontal.
9" high integrally formed backsplash.
2 $\frac{1}{2}$ " high sanitary rolled rim at all free edges.
Leg assemblies located under sink bowls for direct column load support.

CONSTRUCTION

Top: Shall be one-piece die formed with integral 9" high rear splash and 180° sanitary rolled edges at front and ends. All corners shall be TIG welded with all exposed welds ground and polished to blend with adjacent surfaces. (#4 Grain Finish)

Bowls: Shall be die formed with front, bottom, and back, from one sheet with ends seam welded to form one-piece sanitary unit. All exposed welds shall be ground smooth and polished to blend with adjacent surfaces.

Legs: Shall be attached to sinks with cylindrical gussets and gusset plates welded to bottom of bowls and fitted with adjustable bullet feet.

CHOOSE FROM TWO AVAILABLE SERIES

**Standard Series
N-Series**
16 ga. Type 304 S/S
12" Bowl Depth
Galvanized Legs

**Spec Line
SL-Series**
14 ga. Type 304 S/S
14" Bowl Depth
S/S H-Frame Legs

ACCESSORIES

Model		Qty		Model		Qty	
Drains				Faucets			

CORNER SINKS

Bowl Size	N-Series Model No.	Approx. Weight (lbs.) (kg) Cube			SL-Series Model No.	Approx. Weight (lbs.) (kg) Cube			Drainbrd Size
16"x16"	CS-3N16-2D-16	125	57	49	CS-3SL16-2D-16	137	62	53	16"
18"x18"	CS-3N18-2D-18	130	59	60	CS-3SL18-2D-18	142	65	65	18"
18"x18"	CS-3N18-2D-24	140	64	72	CS-3SL18-2D-24	152	69	78	24"
*	CS-3N1824-2D-18	165	75	72	CS-3SL1824-2D-18	177	80	78	18"
24"x24"	CS-3N24-2D-24	180	82	100	CS-3SL24-2D-24	192	87	107	24"

*contains two 18"x24" bowls and one 24"x24" bowl

Sink Options & Accessories Available. Refer to Options Page 34.

DETAILED SPECIFICATIONS

Corner Sinks




Specifications Apply to Both N- and SL-Series

CORNER SINKS

BOWL SIZE	MODEL NO.	O.A. SIZE		DRBD SIZE B	FAUCET LOCATION C	DRAIN LOCATION D	DRAIN CENTERLINE E
		A	W				
16"x16"	CS-3*16-2D-16	53"x21 1/2"	16"	16"	16"	24"	18"
18"x18"	CS-3*18-2D-18	59"x23 1/2"	18"	18"	18"	27"	20"
18"x18"	CS-3*18-2D-24	65"x23 1/2"	24"	18"	18"	33"	20"
**	CS-3*1824-2D-18	65"x29 1/2"	18"	18"	24"	27"	23"
24"x24"	CS-3*24-2D-24	77"x29 1/2"	24"	24"	24"	36"	26"

*N or SL

**contains two 18"x24" bowls and one 24"x24" bowl

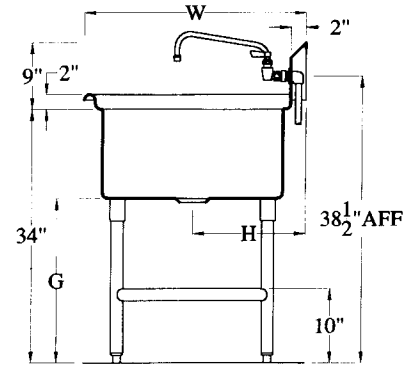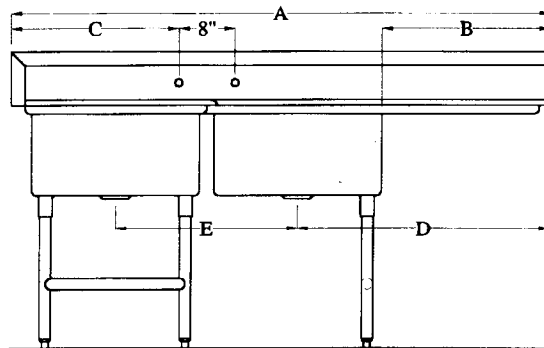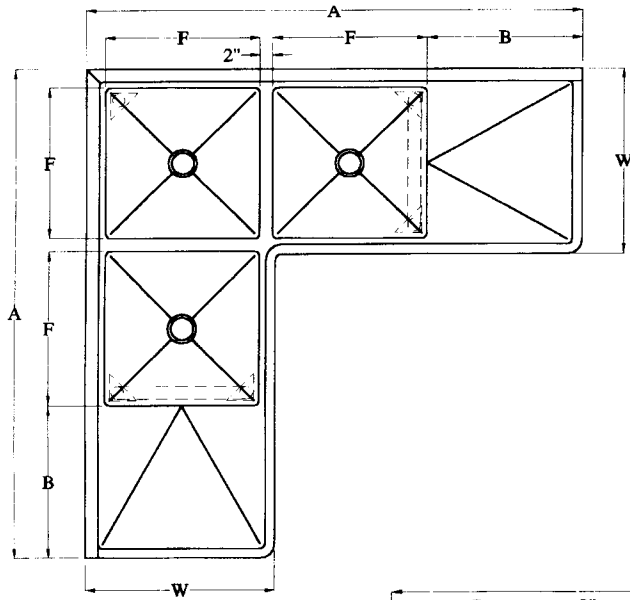

BOWL SIZE	N-Series	SL-Series	
	G	G	H
16"x16"	24	22	11
18"x18"	22	20	12
24"x24"	22	20	15

MECHANICAL REQUIREMENTS

Supply: 1/2" IPS Hot & Cold.

Faucets not included. See Accessories.

Waste Drains: 1 1/2" IPS Basket Type and are included.

Universal Stainless is constantly engaged in a program of improving products and, therefore, reserves the right to change specifications without prior notice.

MATERIALS

N-Series

Bowls: 16 Gauge Type 304 S/S
Top: 16 Gauge Type 304 S/S
Legs: 1 5/8" Diameter Galvanized Tubing

SL-Series

Bowls: 14 Gauge Type 304 S/S
Top: 14 Gauge Type 304 S/S
Legs: 1 5/8" Diameter S/S Tubing