

RADIANT PLANCHA BROILER



Radiant style - JMHBR-36P (shown without legs)

MODEL NO.	DESCRIPTION
☐ JSHBR-36P	RADIANT PLANCHA BROILER W/ CABINET BASE
☐ JMHBR-36P	MODULAR RADIANT PLANCHA BROILER

STANDARD FEATURES

- Six 15,000 BTU/hr. stainless steel burners
- · Variable size multi-point gas connection—see utility information for details
- · Ceramic radiants
- Large 26-1/2" x 28-1/4" lift out broiler grid
- · Grid carriage glides on roller bearing
- · Counter balance mechanism
- · Searing plancha plate
- EZ Clean 4-sided grease trough
- · Stainless steel front, sides and top
- 14 gauge stainless steel all welded body construction
- · Stainless steel gas tubing throughout
- · Stainless steel adjustable 6" legs

AVAILABLE OPTIONS

- ☐ Cap and cover manifold. Left ☐ Right ☐
- ☐ Stainless steel doors (cabinet base models)


ACCESSORIES

- ☐ 6" casters, front two locking (5" diameter wheel)
- \square 36" flex hose with quick disconnect (3/4" connection)
- ☐ 48" flex hose with quick disconnect (3/4" connection)
- ☐ 1" gas pressure regulator (specify gas type)





RADIANT PLANCHA BROILER

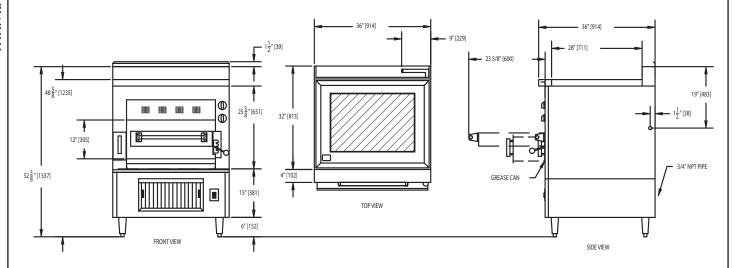

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JSHBR-36P	90,000	36"	36-1/4"	SEE DRAWING	700 LBS.
JMHBR-36P	90,000	36"	36-1/4"	SEE DRAWING	500 LBS.

DESCRIPTION:

Heavy duty radiant gas plancha broiler. To be model #JSHBR _____ manufactured by Jade Range. Provide with six 15,000 BTU/hr. stainless steel burners and ceramic radiants. Provide large lift out 26-1/2" x 28-1/4" cook grid. Furnish carriage complete with rolling bearings and multi-action handle. Steel plancha plate. To have 14 gauge all welded body with stainless steel front and sides. Stainless steel plate shelf to be adjustable. To have 6" stainless steel adjustable legs.

SPECIFY BASE CABINET BASE

To have stainless steel cabinet interior and exterior. Optional stainless steel doors.

SPECIFY TYPE OF GAS WHEN ORDERING.
SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure: Natural Gas 5" W.C. minimum Propane Gas 10" W.C. minimum 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

JADE

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA