



PC-8-SS

NOTE: Faucet handles not included.

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Pipe Cantilever Tower

PC- - -

Size: Specify the number of faucets from 4, 6 or 8

Finish:
SS = Grainline
MF = Mirror finish

Standard Features

- 1/4" shanks with 3/16" restriction lines
- Includes all stainless steel faucets
- Surface mount, stainless steel drain pan with removable, perforated insert
- Tower mounting hardware for tops up to 4" thick

Configurable Options

- 4, 6 or 8 faucets
- Right or left orientation
- Grainline or mirror finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Rinser faucet

Specifications

Materials

- Tower shell is 304 stainless steel; 0.065" wall thickness, 4" diameter
- Flange is 1/4", 304 stainless steel
- 20 gauge stainless steel drain pan and perforated inserts

Shank Sizes

- 1/4" I.D. with 3/16" fitting

Drains

- 1/2" tailpiece on drain pan

Rinser Faucet (optional)

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

Optional Rinser Faucet

Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.



Optional Rinser Faucet Extension

03012383
Rinser Faucet Assembly



Intertek
4004503
Conforms to NSF/ANSI STD 372

To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


Pipe Cantilever Towers

Drawings

SIDE ELEVATIONS







LEFT ORIENTATION




RIGHT ORIENTATION

PLAN VIEWS


NORINSERFAUCET

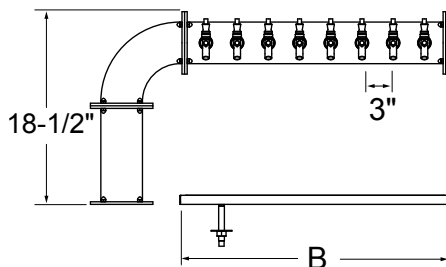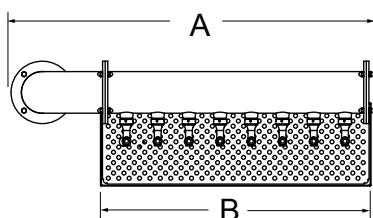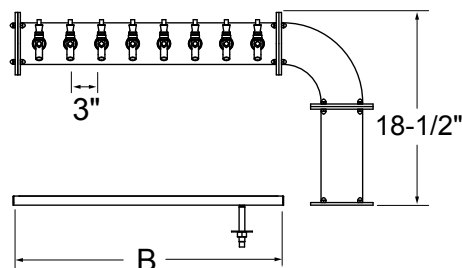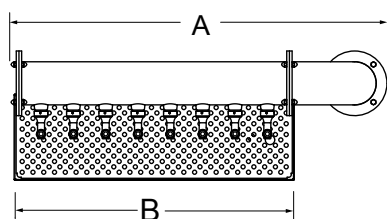





WITH INSER FAUCET



LEFT ORIENTATION



RIGHT ORIENTATION

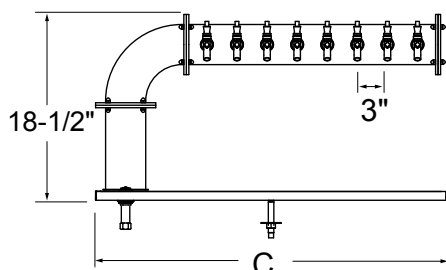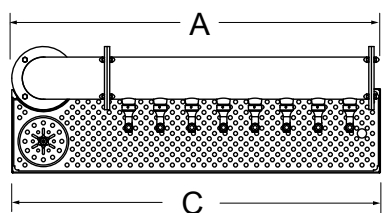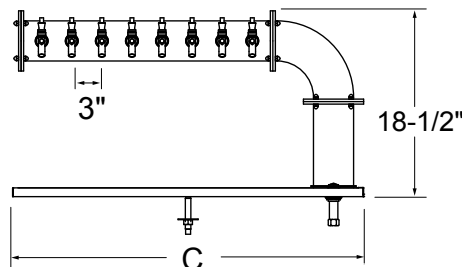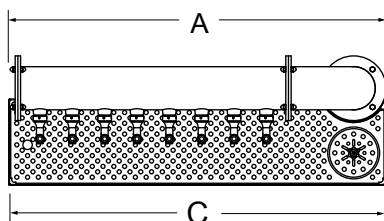

PIPE CANTILEVER TOWER

FAUCETS	4	6	8
"A" WIDTH	23"	29"	35"
"B" WIDTH	14"	20"	26"
"C" WIDTH	23"	29"	35"