

RFK-0320 Flake Ice Machine

RFK-0320 Flake Ice Machine

Models

- RFK-0320



Model RFK-0320A
Flake Ice Machine
on D-420 Bin

Standard Features

- Up to 170 kg (375 lbs) daily flake ice production.
- High load maintenance free bearing for enhanced reliability.
- Service updates facilitate installation and make cleaning easier.
- Flake ice is perfect for food display, salad bar, and cold therapy/healthcare
- Ice form around object without bruising and hold object in place without tipping/spilling
- Heavy duty stainless steel cabinet resists corrosion



Specifications

Condenser Heat of Rejection (BTU per hour):

5,000 (average)

Refrigerant:

R452A

Operating Limits:

- Ambient Temperature Range: 10°-43°C (50°-110°F)
- Water Temperature Range: 3°-32°C (37°-90°F)
- Water Pressure Ice Maker Water In:
Min. 1 bar (14 psi)
Max. 6 bar (84 psi)

Ice Machine Electric

220-240/50/1

Ave power consumption:

830 W

Maximum fuse size:

10 amps.

HACR-type circuit breakers can be used in place of fuses.

Standard Features

Flake ice is small hard bits of ice ideally suited for presentation applications.



Ice shown actual size



UL STD 563
CAN/CSA-C22.2 No. 120




SANITATION
NSF/ANSI STD 12





RFK-0320 Flake Ice Machine

RFK-0320 on D-420

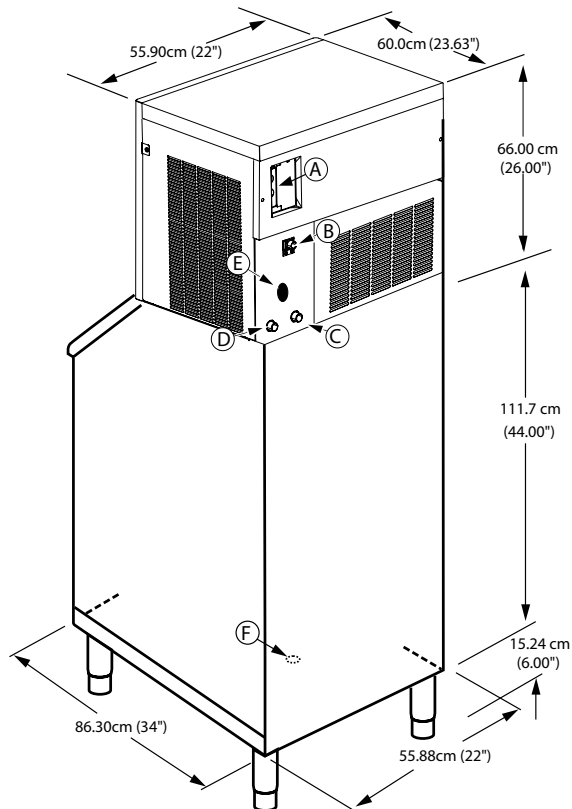

Installation Note -
Minimum installation clearance:
Top/sides: 20.32cm (8")
Back: 12.70cm (5")

- (A) Electrical Entrance (2) Options
- (B) 0.95cm F.P.T. Condenser Inlet (water-cooled only)
- (C) 1.27cm M.P.T. Condenser Drain (water-cooled only)
- (D) 1.27cm M.P.T. Ice Making Water Drain
- (E) 0.95cm F.P.T. Ice Making Water Inlet
- (F) 1.9cm Bin Drain

Shipping Weight 74 kg / 163 lbs

Ice Machine Electric

RFK-0320 on D-420




Height: 193.00 cm (76")
Width: 60 cm (23.63")
Depth:
Bin Storage: 147 kgs (310 lbs)

Height includes adjustable bin legs 15.24 to 17.78cm, (6 to 7") set at 15.24cm (6").

Ice Machine Electric

K-00472 Bin Adapter needed for RFK-0320 on 30" D-400 or D-570 Ice Bin

Air Flow Overhead View

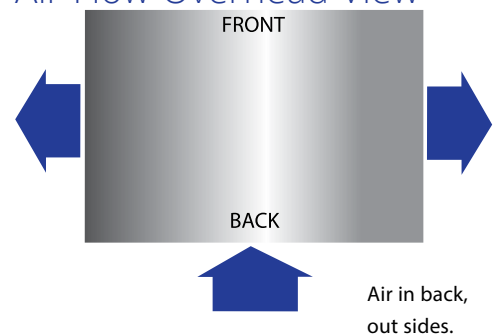

Air-Cooled Ice Machine	Model	Ice Shape	Ice Production 24 Hours		Power kWh/100lbs @ 32°Air/21°C Water	Potable Water Usage (45.4 kgs/100 lbs of Ice)
			10° Air/7°C Water 50° Air/45°F Water	21°Air/15°C Water 70°Air/60° F Water		
	RFK-0320A	Flake	165 kg 364 lbs	160 kg 353 lbs	6.81 kWh	45.4 L 12 gal.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

www.manitowocice.com

Welbilt Deutschland GmbH
Auf der Weih 11
D - 35745 Herborn,
Germany
Tel.: +49 27 72 58 050
welbilt.com.de

Welbilt Iberia, S.A.U
Textil, 6 - Pol.Ind. La Ferreria
- 08110 Montcada i Reixac
Barcelona, Spain
Tel.: +34 902 20 10 69
welbilt.com.es

Welbilt UK
Ashbourne House, The Guildway,
Old Portsmouth Rd, Guildford
GU3 1LR, United Kingdom
Tel.: +44 1483 464900
www.welbilt.uk

