

"ST4R1.5-SBW" STAINLESS STEEL TOP WORK TABLES

14GA Top w/1.5" Riser - Stainless Steel Legs & Fixed Bracing

FEATURES:

- 14GA Stainless Steel Top
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- Top Is Sound Deadened
- Reinforced With 1"x2" Channel Running Length Of Table
- 1-1/2" Stallion Edge On Front And 1-1/2" Backsplash On Rear With Side Edges 90 Degree Bend Down For Table Line-Up
- Stainless Steel Base With Fixed Bracing
- Adjustable Bullet Feet
- Ships Welded

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Top: 14GA, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Bracing: 1-1/4" Round O.D. , 18GA Tubular Stainless Steel
- Legs: 1-5/8" Round O.D. , 16GA Tubular Stainless Steel
- Gussets: Stainless Steel
- Feet: 1" Adjustable Stainless Steel Bullet Feet



ST4R1.5-3048SBW

CERTIFICATIONS:

ACCESSORIES
DESCRIPTION


Drawer
Drawer Lock
Casters
Overshelves
Sinks
Pot Rack

"ST4R1.5-SBW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SBW	42	1000	ST4R1.5-3024SBW	47	1000	ST4R1.5-3624SBW	53	1000
30"	ST4R1.5-2430SBW	47	1000	ST4R1.5-3030SBW	52	1000	ST4R1.5-3630SBW	60	1000
36"	ST4R1.5-2436SBW	52	1000	ST4R1.5-3036SBW	59	1000	ST4R1.5-3636SBW	67	1000
48"	ST4R1.5-2448SBW	63	1000	ST4R1.5-3048SBW	70	1000	ST4R1.5-3648SBW	80	1000
60"	ST4R1.5-2460SBW	73	720	ST4R1.5-3060SBW	82	720	ST4R1.5-3660SBW	93	720
72"	ST4R1.5-2472SBW	83	470	ST4R1.5-3072SBW	93	470	ST4R1.5-3672SBW	106	470
84"	ST4R1.5-2484SBW	102	1500	ST4R1.5-3084SBW	115	1500	ST4R1.5-3684SBW	130	1500
96"	ST4R1.5-2496SBW	112	1500	ST4R1.5-3096SBW	127	1500	ST4R1.5-3696SBW	144	1500
108"	ST4R1.5-24108SBW	121	1500	ST4R1.5-30108SBW	138	1500	ST4R1.5-36108SBW	158	1500
120"	ST4R1.5-24120SBW	133	1330	ST4R1.5-30120SBW	150	1330	ST4R1.5-36120SBW	172	1330
132"	ST4R1.5-24132SBW	143	1060	ST4R1.5-30132SBW	162	1060	ST4R1.5-36132SBW	185	1060
144"	ST4R1.5-24144SBW	154	830	ST4R1.5-30144SBW	175	830	ST4R1.5-36144SBW	201	830

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

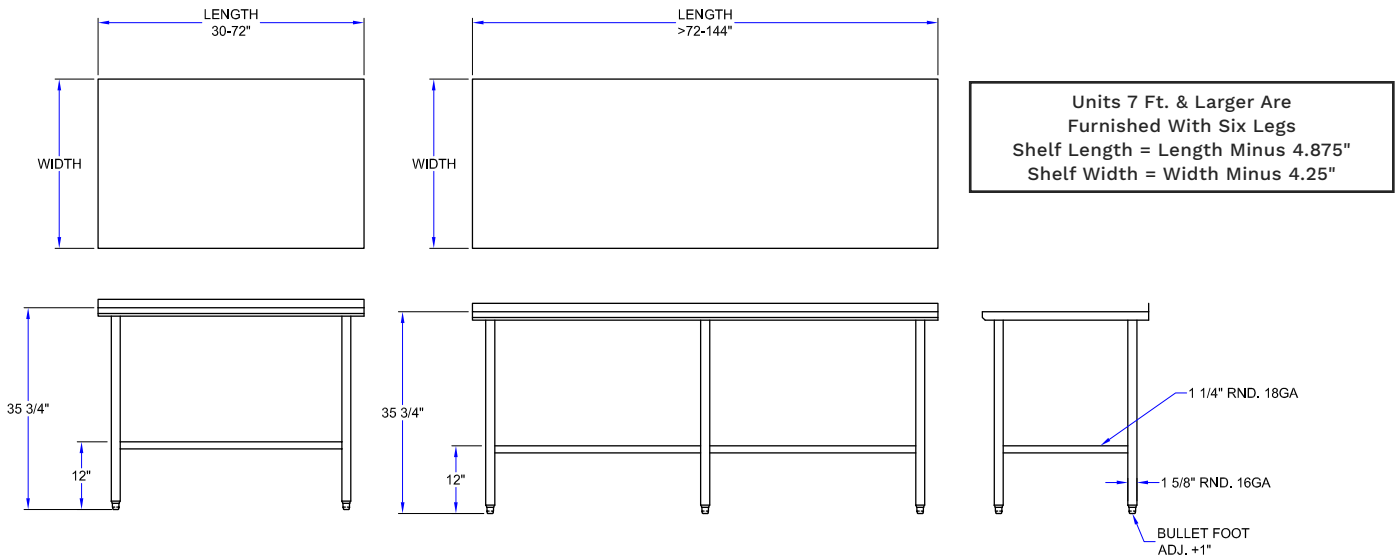

MODEL # STRUCTURE

1.5 = Ht. Of Riser w/Turndown

R = Top w/Riser

4 = 14GA Work Surface

ST = Stainless Steel Top



24 = Width Of Work Surface

30 = Length Of Work Surface

SB = Stainless Legs & Bracing

K = Ships Welded

ST4R1.5-2430SBW

"ST4R1.5-SBW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SBW	42	1000	ST4R1.5-3024SBW	47	1000	ST4R1.5-3624SBW	53	1000
30"	ST4R1.5-2430SBW	47	1000	ST4R1.5-3030SBW	52	1000	ST4R1.5-3630SBW	60	1000
36"	ST4R1.5-2436SBW	52	1000	ST4R1.5-3036SBW	59	1000	ST4R1.5-3636SBW	67	1000
48"	ST4R1.5-2448SBW	63	1000	ST4R1.5-3048SBW	70	1000	ST4R1.5-3648SBW	80	1000
60"	ST4R1.5-2460SBW	73	720	ST4R1.5-3060SBW	82	720	ST4R1.5-3660SBW	93	720
72"	ST4R1.5-2472SBW	83	470	ST4R1.5-3072SBW	93	470	ST4R1.5-3672SBW	106	470
84"	ST4R1.5-2484SBW	102	1500	ST4R1.5-3084SBW	115	1500	ST4R1.5-3684SBW	130	1500
96"	ST4R1.5-2496SBW	112	1500	ST4R1.5-3096SBW	127	1500	ST4R1.5-3696SBW	144	1500
108"	ST4R1.5-24108SBW	121	1500	ST4R1.5-30108SBW	138	1500	ST4R1.5-36108SBW	158	1500
120"	ST4R1.5-24120SBW	133	1330	ST4R1.5-30120SBW	150	1330	ST4R1.5-36120SBW	172	1330
132"	ST4R1.5-24132SBW	143	1060	ST4R1.5-30132SBW	162	1060	ST4R1.5-36132SBW	185	1060
144"	ST4R1.5-24144SBW	154	830	ST4R1.5-30144SBW	175	830	ST4R1.5-36144SBW	201	830

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.