



AMERICAN RANGE

A **HATCO** COMPANY

Project _____

Item # _____

Quantity _____

GAS CONVECTION OVEN

GAS TYPE: ☐ NATURAL ☐ LP



☐ M-1

☐ M-2

STANDARD FEATURES

- Bakery depth models 90,000 BTU/hr. total heat output per oven
- All stainless steel front, sides, and top
- 50/50 dependent double door, swings open
- 135°, one handed operation opens and closes both doors simultaneously
- Door options:
Two glass doors (GG)
Glass door, right (GR)
Glass door, left (GL)
Two solid doors (SS)
- Porcelainized oven interior for easy cleaning
- Five chrome racks with 12 position chrome rack guides
- Holds up to (5) 18" x 26" sheet pans left to right or front to back
- Electronic spark igniter
- 1/2 H.P. two speed oven blower motor with maximum of 9 amp draw. Includes power cord
- Oven cool switch for rapid cool down
- Burner "on" light
- 1 hour timer
- Thermostat control from 200°F to 500°F (93°C to 260°C)
- Two year limited warranty, parts, and labor

OPTIONAL FEATURES

- Cooling/storage racks
- Direct vent adapter
- Heavy duty swivel casters



Model Shown M-2
(Bakery depth)

DESCRIPTION

American Range, model M-1 single or M-2 double, bakery depth convection oven with 90,000 BTU/hr., temperature range from 200°F to 500°F. A half horsepower fan offers low and high speed fan options for baking and roasting. Porcelainized oven cavity includes 5 racks and 12 position rack guide to accommodate 18" x 26" sheet pan (1) or 12" x 20" hotel pan (2) per rack. The oven includes a 1 hour timer and a cool down mode. Stainless steel doors with a glass window or a solid door swing 135° for easy one handed operation.



DESIGNED & BUILT IN USA
PROFESSIONAL COOKING EQUIPMENT

A70390 Rev C 06022025




AMERICAN RANGE

A **HATCO** COMPANY

13592 Desmond St Pacoima CA 91331
T. 818.897.0808 Toll Free: 888.753.9898
www.AmericanRange.com

MAJESTIC GAS BAKERY DEPTH CONVECTION OVEN

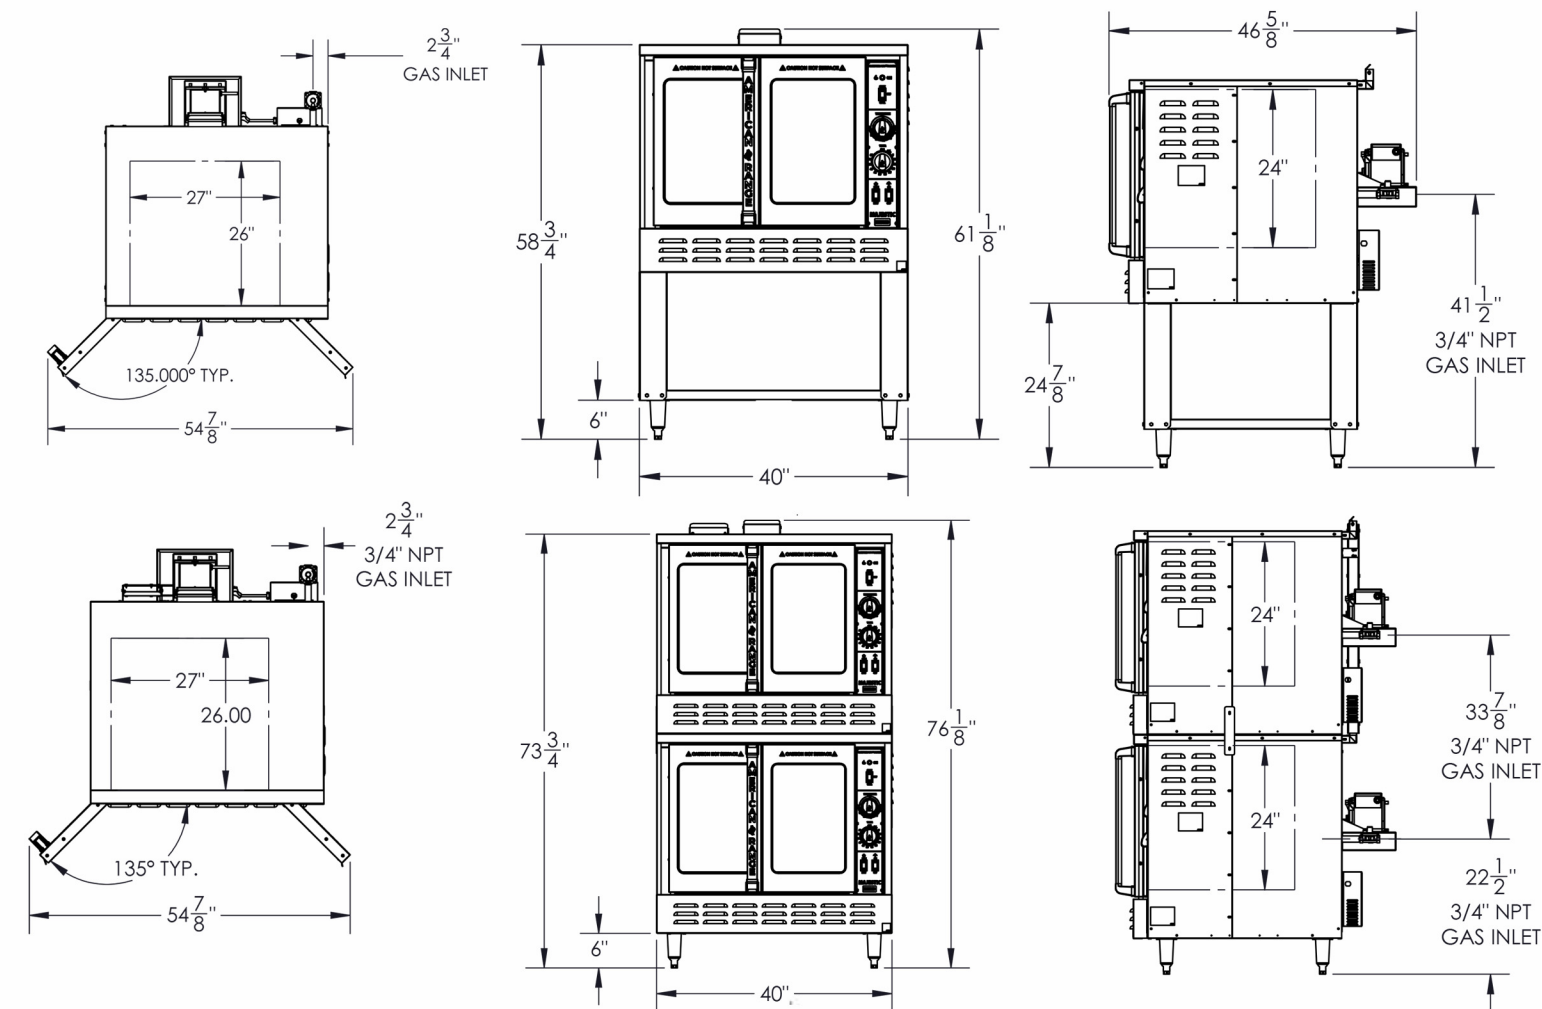

| MODEL | WIDTH (MM) | DEPTH (MM) | HEIGHT (MM) | BTU/hr. | (KW) | BURNERS | LBS | (KG) |
|-------|------------|----------------|----------------|---------|------|---------|------|-------|
| M-1 | 40" (1016) | 46" 5/8 (1184) | 61" 1/8 (1553) | 90,000 | (26) | 2 | 640 | (291) |
| M-2 | 40" (1016) | 46" 5/8 (1184) | 76" 1/8 (1934) | 180,000 | (52) | 4 | 1280 | (582) |

Add two letter code to model number for door preference

Door options: GG- Two glass doors, GR- Glass door, right, GL- Glass door, left, SS- Two solid doors

Installation Instructions:

Ovens must be installed in accordance with local codes or in their absence with the

1. National Fuel Gas Code: ANSI Z223.1; CAN/CGA-B149.1 Natural Fuel and Propane Installation Code, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
2. An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations
3. This appliance is intended for commercial use. NOT intended for Residential Use.
4. Specify installation elevation if above 2000 feet (610m)
5. Please specify gas type when ordering
6. GAS INLET SIZE (All Models): One 3/4" NPT gas connections provided at rear. One 3/4" NPT gas pressure regulators are provided and must be installed (by others) when unit is connected to gas supply.
7. COMBUSTIBLE WALL CLEARANCES

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear.

| CONVECTION OVEN ELECTRICAL | VOLTAGE | PHASE | AMPS |
|----------------------------|---------|-------|------|
| | 120 | 1 | 4 |

| MANIFOLD PRESSURE | | |
|-------------------|-------------|---------------|
| NATURAL GAS | PROPANE GAS | MANIFOLD SIZE |
| 5.0" W.C. | 10.0" W.C. | 3/4" (19MM) |

*Shipping weight includes packaging and is approximate.

15 amps three prong cord provided

American Range is a quality manufacturer of commercial cooking equipment.

Because of continuing product improvements these specifications are subject to change without prior notice.

