



RESOURCES

**REFRIGERATED**

## Drop-In Cold Food Wells

w/ 1" Pan Rails

Models:

E-CP1-1


E-CP1-2

E-CP1-3

E-CP1-4

E-CP1-5

E-CP1-6

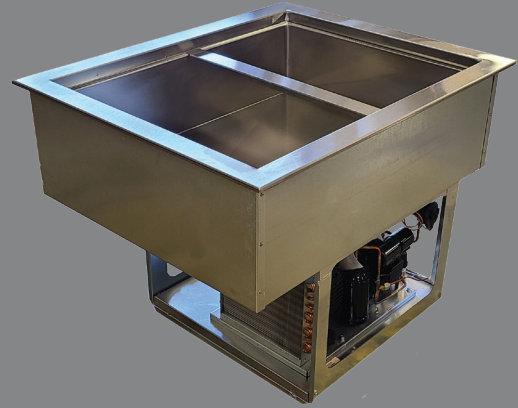

### STANDARD FEATURES

- Self contained drop-in design
- Features 1" deep pan rails
- Hold standard 12" by 20" food pans and fractional sized pans
- Meets NSF Standard 7
- Stainless steel top and liner for maximum strength and durability
- 1" drains for ease of cleaning
- On-off switch with 8 ft. cord & plug for ease of installation and operation
- Type 134A or 404A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation keeps food cold while saving energy

### DESCRIPTION

In Cold Pans hold pre-chilled food products at cold, fresh and safe serving temperatures All models are completely self-contained in one to six-pan models with individual thermostatic controls, are CFC free and include an 8 ft. 120V cord and plug.

### SPECIFICATIONS

**Exterior** – One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.


**Interior** – CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning, and recessed ledge for pan support.

**Refrigeration** – Type 134A or 404A CFC free refrigerant system featuring wrapped coil construction on both sides and bottom, individual thermostats, on/off switch, 8 ft. cord and plug set NEMA 5-15P. Refrigeration system features sight glass, easy service valves, dryer/filter and receiver.


# Drop-In Cold Food Wells

□ E-CP1-1 □ E-CP1-2 □ E-CP1-3 □ E-CP1-4 □ E-CP1-5 □ E-CP1-6

Model E-CP1-4  
shown below

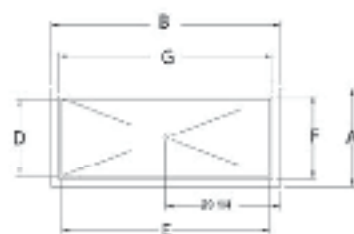

PLAN VIEW

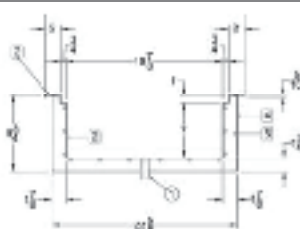

SECTION VIEW  
SCALE: 1/2" = 1"

**Note:** Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

INCHES  
MM




ADAPTER BAR  
(3) INCLUDED



FRONT VIEW  
OPERATOR SIDE



SIDE VIEW



ISOMETRIC

## SPECIFICATIONS

|              | OVERALL DIMENSIONS                |                                   | INTERIOR DIMENSIONS        |                                   | CUT OUT DIMENSIONS                |                                   |                                   |
|--------------|-----------------------------------|-----------------------------------|----------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Model Number | A<br>Front to Back<br>Inches (MM) | B<br>Left to Right<br>Inches (MM) | C<br>Height<br>Inches (MM) | D<br>Front to Back<br>Inches (MM) | E<br>Left to Right<br>Inches (MM) | F<br>Front to Back<br>Inches (MM) | G<br>Left to Right<br>Inches (MM) |
| E-CP1-1      | 25-3/8 (645)                      | 17-3/8 (441)                      | 24.5 (622)                 | 19-7/8 (505)                      | 11-7/8 (301)                      | 23-7/8 (606)                      | 15-7/8 (403)                      |
| E-CP1-2      | 25-3/8 (645)                      | 31 (787)                          | 24.5 (622)                 | 19-7/8 (505)                      | 25-1/2 (648)                      | 23-7/8 (606)                      | 29-1/2 (749)                      |
| E-CP1-3      | 25-3/8 (645)                      | 44-3/4 (1137)                     | 24.5 (622)                 | 19-7/8 (505)                      | 39-1/4 (997)                      | 23-7/8 (606)                      | 43-1/4 (1099)                     |
| E-CP1-4      | 25-3/8 (645)                      | 58-1/2 (1486)                     | 24.5 (622)                 | 19-7/8 (505)                      | 53 (1346)                         | 23-7/8 (606)                      | 57 (1448)                         |
| E-CP1-5      | 25-3/8 (645)                      | 72-1/4 (1847)                     | 24.5 (622)                 | 19-7/8 (505)                      | 66-3/4 (1695)                     | 23-7/8 (606)                      | 70-3/4 (1797)                     |
| E-CP1-6      | 25-3/8 (645)                      | 86 (2184)                         | 24.5 (622)                 | 19-7/8 (505)                      | 80-1/2 (2045)                     | 23-7/8 (606)                      | 84-1/2 (2146)                     |

## POWER SUPPLY

| Model Number | VOLTS | HP  | AMPS | PHASE  | POWER SUPPLY | REFRIGERANT |
|--------------|-------|-----|------|--------|--------------|-------------|
| E-CP1-1      | 115   | 1/4 | 5.5  | SINGLE | NEMA 5-15P   | 134A        |
| E-CP1-2      | 115   | 1/4 | 5.5  | SINGLE | NEMA 5-15P   | 134A        |
| E-CP1-3      | 115   | 1/4 | 5.5  | SINGLE | NEMA 5-15P   | 134A        |
| E-CP1-4      | 115   | 1/3 | 6.5  | SINGLE | NEMA 5-15P   | 404A        |
| E-CP1-5      | 115   | 1/2 | 6.4  | SINGLE | NEMA 5-20P   | 404A        |
| E-CP1-6      | 115   | 1/2 | 6.4  | SINGLE | NEMA 5-20P   | 404A        |

## SHIPPING INFORMATION

|              | WEIGHTS                      |                              | CARTON DIMENSIONS |                   |                    | CRATE SIZE |              |
|--------------|------------------------------|------------------------------|-------------------|-------------------|--------------------|------------|--------------|
| Model Number | SHIPPING WEIGHTS POUNDS (KG) | SHIPPING WEIGHTS POUNDS (KG) | WIDTH INCHES (MM) | DEPTH INCHES (MM) | HEIGHT INCHES (MM) | CUBIC FEET | CUBIC METERS |
| E-CP1-1      | 89 (40)                      | 84 (38)                      | 19 (482)          | 27 (686)          | 32 (813)           | 9.5        | 0.27         |
| E-CP1-2      | 182 (83)                     | 176 (80)                     | 27 (686)          | 32 (813)          | 32 (813)           | 16.0       | 0.46         |
| E-CP1-3      | 194 (88)                     | 187 (85)                     | 27 (686)          | 46 (1168)         | 32 (813)           | 23.0       | 0.65         |
| E-CP1-4      | 258 (117)                    | 250 (113)                    | 27 (686)          | 60 (1524)         | 32 (813)           | 30.0       | 0.85         |
| E-CP1-5      | 278 (126)                    | 269 (122)                    | 27 (686)          | 73 (1854)         | 32 (813)           | 36.5       | 1.04         |
| E-CP1-6      | 290 (154)                    | 280 (109)                    | 27 (686)          | 87 (2210)         | 32 (813)           | 43.5       | 1.23         |