




Technical Data

Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	3250 BTU
Capacity	41.9 cu.ft.
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing / Without Dutch Half Doors
Door Type	Solid
Features	LED Lighting
Installation Type	Freestanding
Horsepower	3/4 HP
Amps	8.7 A
Number of Doors	2 Door / Left Right
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	4.94 oz.
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	-8 ~ 0 Degrees F
Casters	With Casters (2 with brakes)
	Freezer Reach-In



Plan View

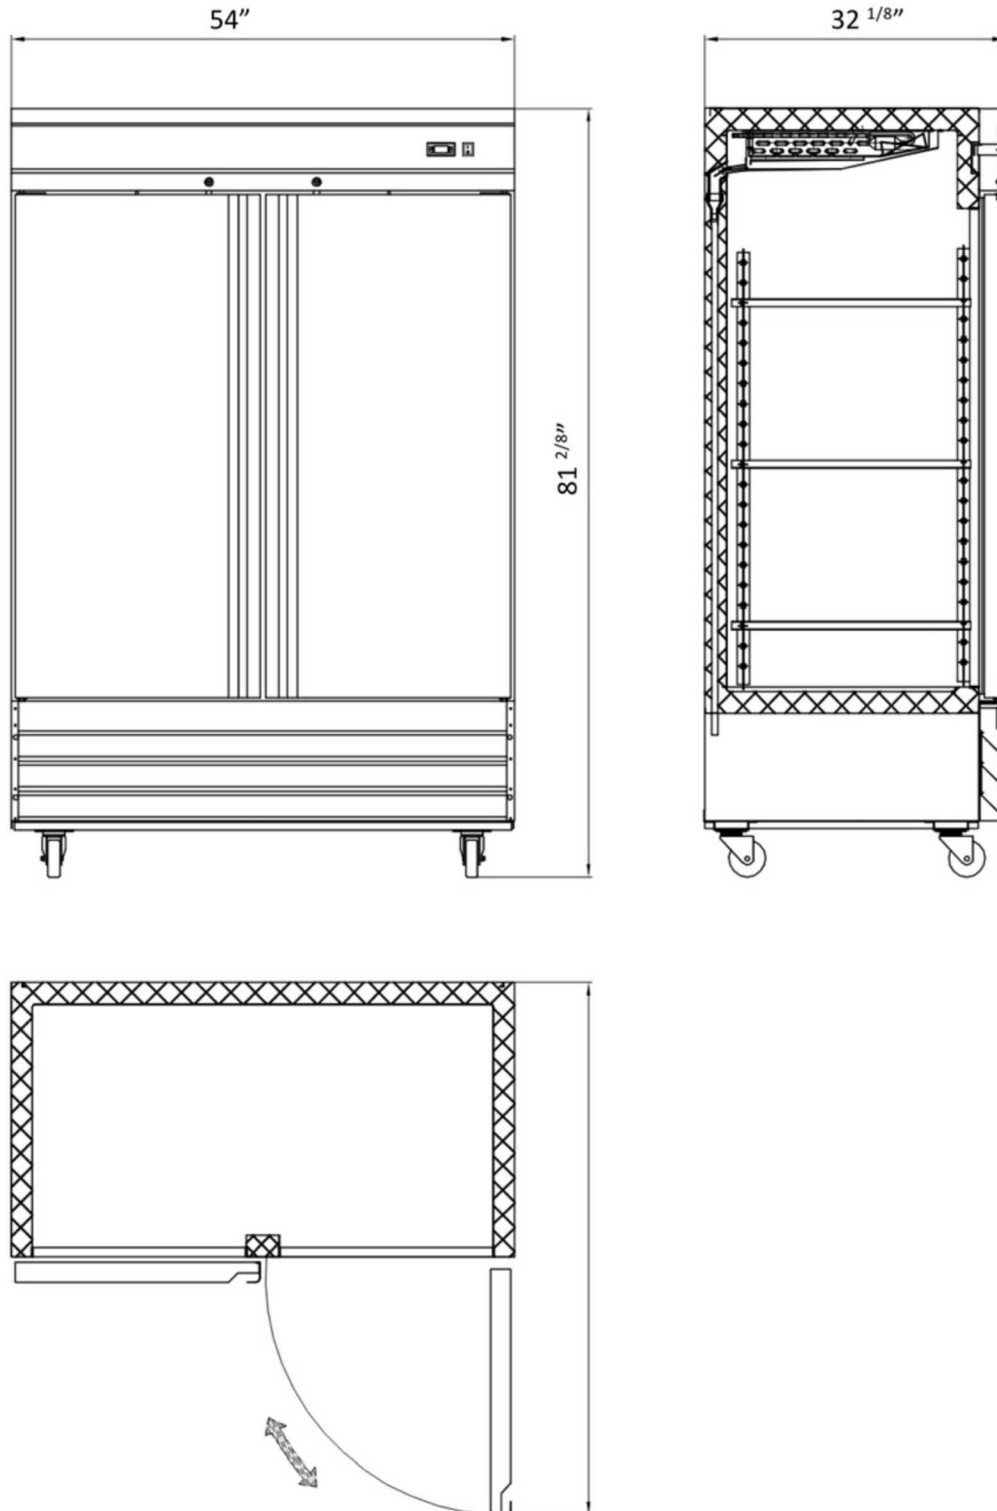



Notes & Details

1. Durable & Functional Design

- Stainless steel interior & exterior for durability and easy cleaning.
- Swing doors with self-closing mechanism to prevent temperature loss.
- Heavy-duty casters (2 with brakes) for mobility and stability.
- LED lighting for clear interior visibility.
- Freestanding installation for easy placement.

2. Cooling & Performance

- Refrigerators: Maintain 33°F – 40°F for fresh food storage.
- Freezers: Maintain -8°F – 0°F for frozen goods.
- Electronic control panel for precise temperature adjustments.
- Defrost system for efficient operation.

3. Storage & Capacity

- Single-section models: 17.2 cu. ft. with 3 adjustable shelves.
- Two-section models: 41.9 cu. ft. with 6 adjustable shelves.

4. Refrigeration System

- Eco-friendly R-290 refrigerant for energy efficiency.
- Horsepower range: 1/5 HP to 3/4 HP, depending on model.
- BTU Output: 1100 – 3250 for powerful cooling.
- Bottom-mounted compressor for better efficiency and easy access.

5. Electrical & Power

- Voltage: 115V / 60Hz / 1 Phase for standard commercial use.
- Amps: 3.4A – 8.7A, model-dependent.
- Standard plug type for easy installation.

Ideal for:

- ✓ Restaurants, cafés, bakeries, and catering businesses.
- ✓ Commercial kitchens needing reliable refrigeration and freezing.
- ✓ Businesses looking for durable, energy-efficient, and user-friendly cooling solutions.

ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

5-15P



This unit comes with a NEMA 5-15P plug

ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.