SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR 4-Door, Sliding







JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS		
SDPR48	4-Door Model	

NSF/ANSI Standard 7 Listed for open food storage.

SDPR48 Shown

KEY PRODUCT FEATURES AND BENEFITS

- Remote back bar refrigerators allow customers to mount the compressor in an alternate location, ideal for remote servicing and noise isolation
- Self-closing sliding glass door keep narrow profile in tight bar enviornment
- · Easy access from both sides with pass-thru sliding doors
- Stainless steel interior and top standard on all Perlick Back Bar refrigeration for long life durability and easy to clean hygienic storage
- 2" Foamed-in-place insulation provides energy savings using Ecomate(tm), a blowing agent that has zero-ozone depletion and zero global warming potential
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage

Quick Features:

- Choose between 6000K white LED lighting or cool blue display lighting
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty
- · Made in the USA



SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR 4-Door, Sliding


MODEL NUMBERS		SDPR48
NUMBER OF DOORS		4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	48 (1219)
	Depth - in. (mm)	2411/16 (678)
	Height - in. (mm)	34% (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)
	Depth - in. (mm)	18¾ (476)
	Height - in. (mm)	28½ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		14.1 (399.27)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	314/515
	STAGGERED - 12 OZ. BOTTLE/ CAN	339/552
SHIPPING WEIGHT Lbs. (kg.)		274 (124)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.6
	Electrical Connection	Hard wired
	Defrost Initiation	Automatic
	Defrost Type	Off cycle
	Lighting Type	LED
REFRIGERATION SPECIFICATIONS	Expansion Device	TXV
	Evaporator Capacity-Remotes	1900 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R404a
PLUMBING	Floor Drain Included	Yes
	Evaporator Condensate	Field plumbed

Wine Temperature refrigerators do not carry NSF Rating for open food storage.

Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.

SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR 4-Door, Sliding

Note: Open floor drain not provided on models intended for non-packaged food.

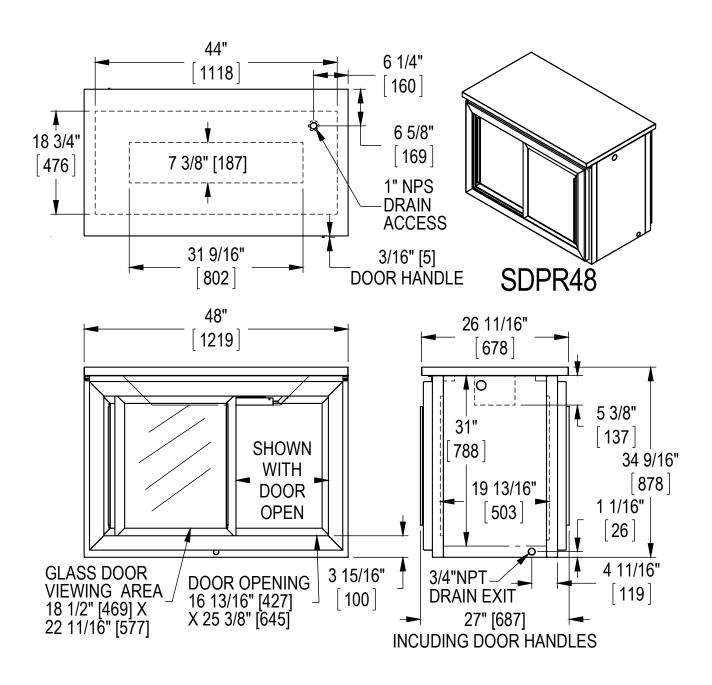

California Prop 65 Notice:

